



浙江大学计算机学院
数字媒体与网络技术


Digital Asset Management

数字媒体资源管理

6. Introduction to Digital Media Retrieval

任课老师：张宏鑫
2014-11-14

The workflow of digital media analysis and retrieval

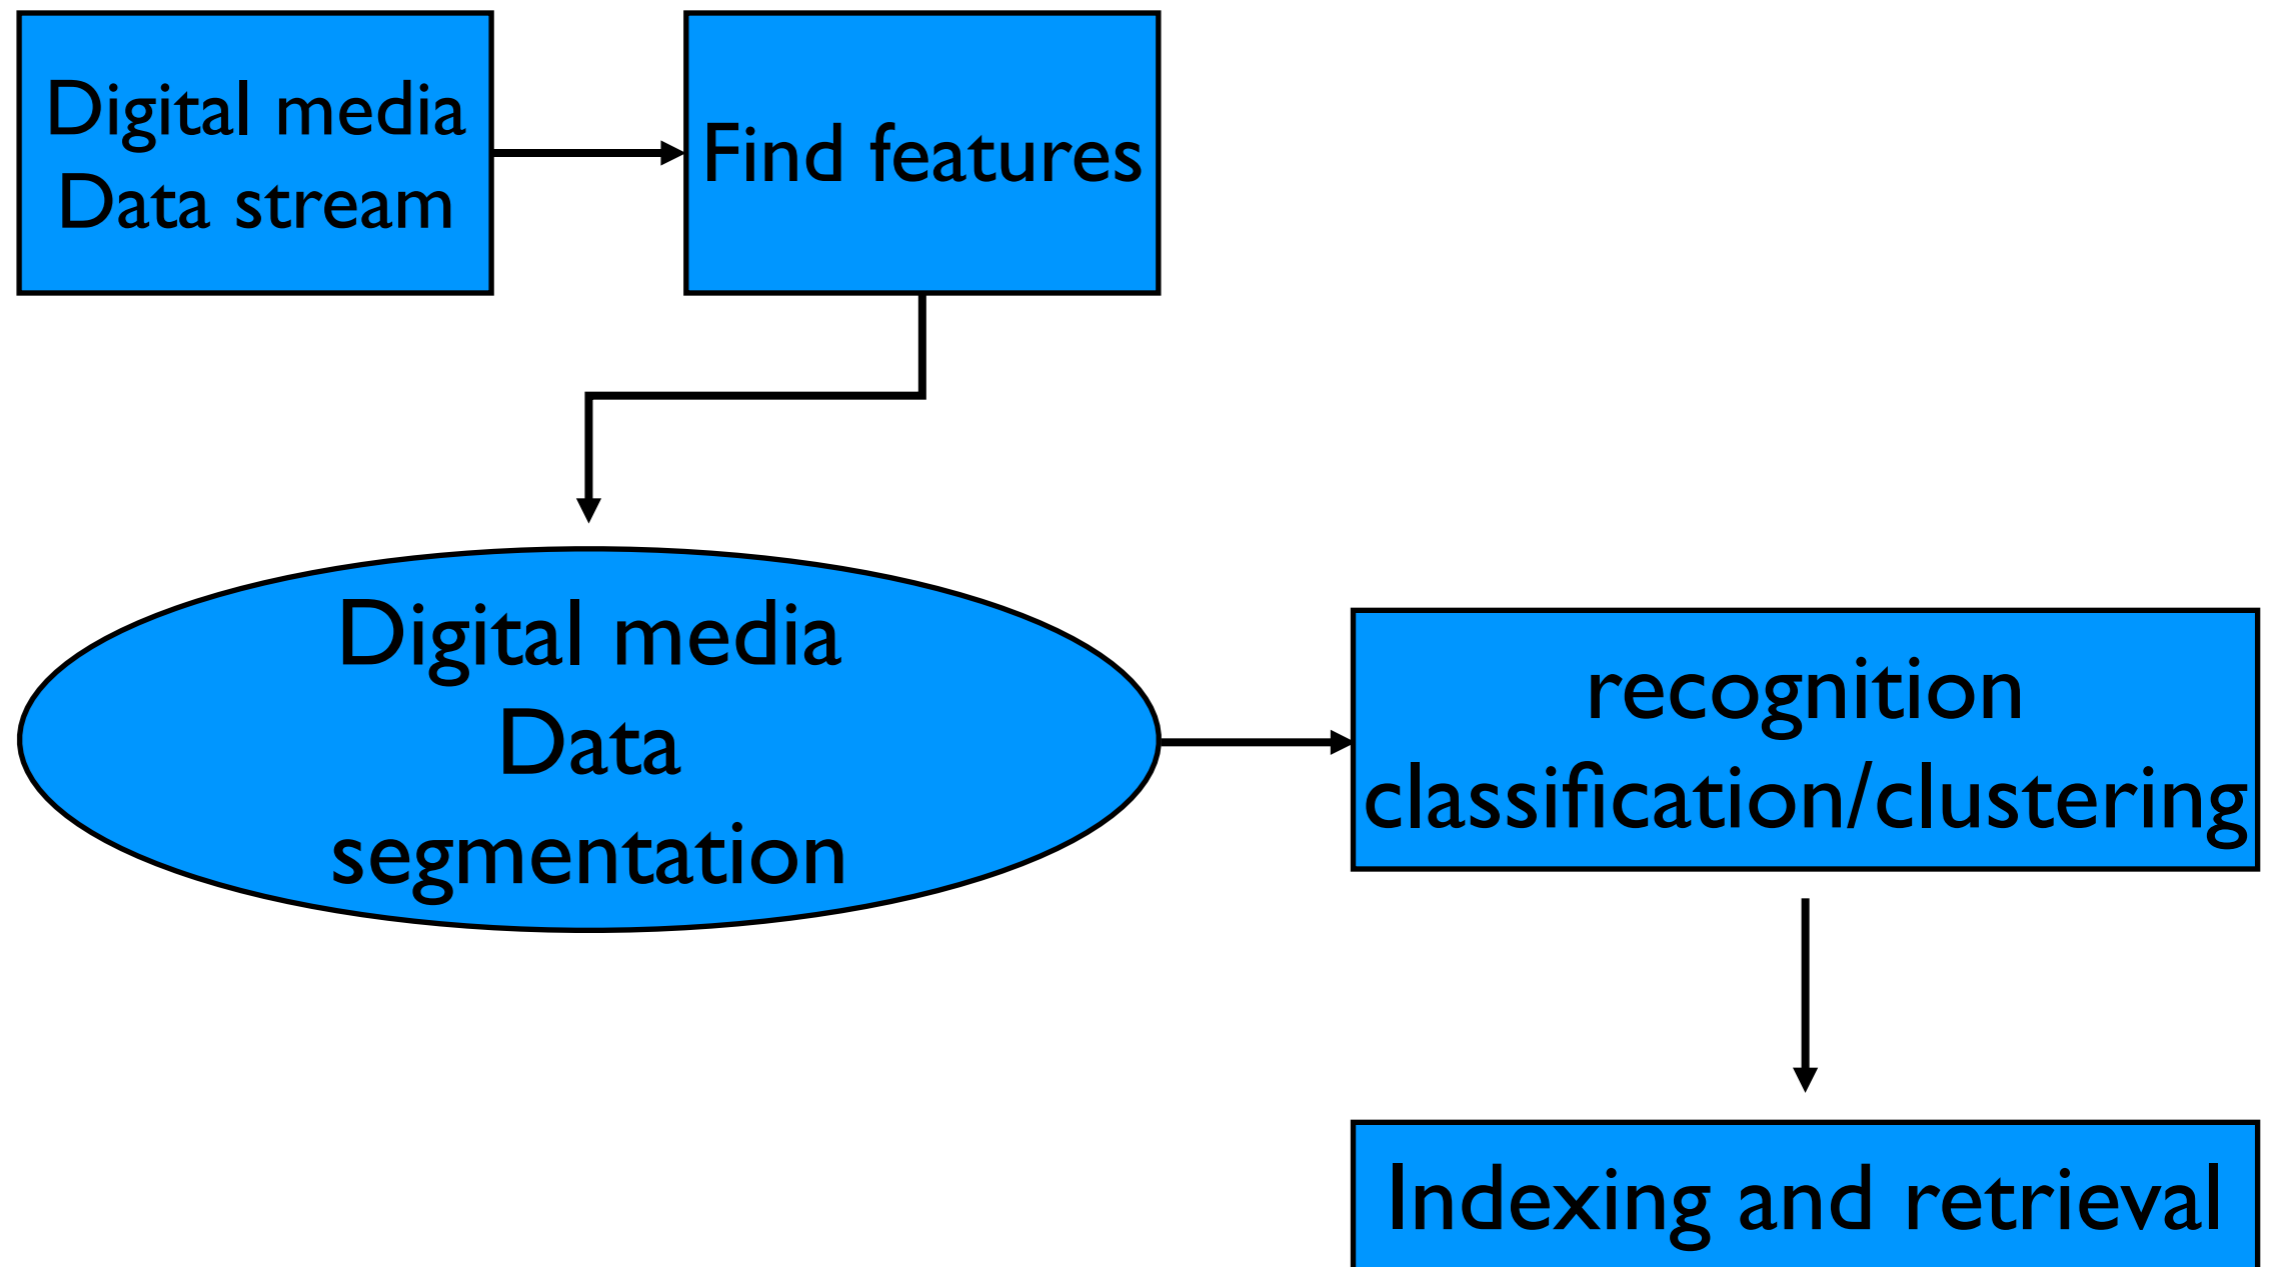



3. Video retrieval techniques




Differences and relations between image and video

- Images are **static**, but video are **dynamic**.
- Video stream can be viewed as sequence of image frames.




CBVR

- Sample YouTube Video page:

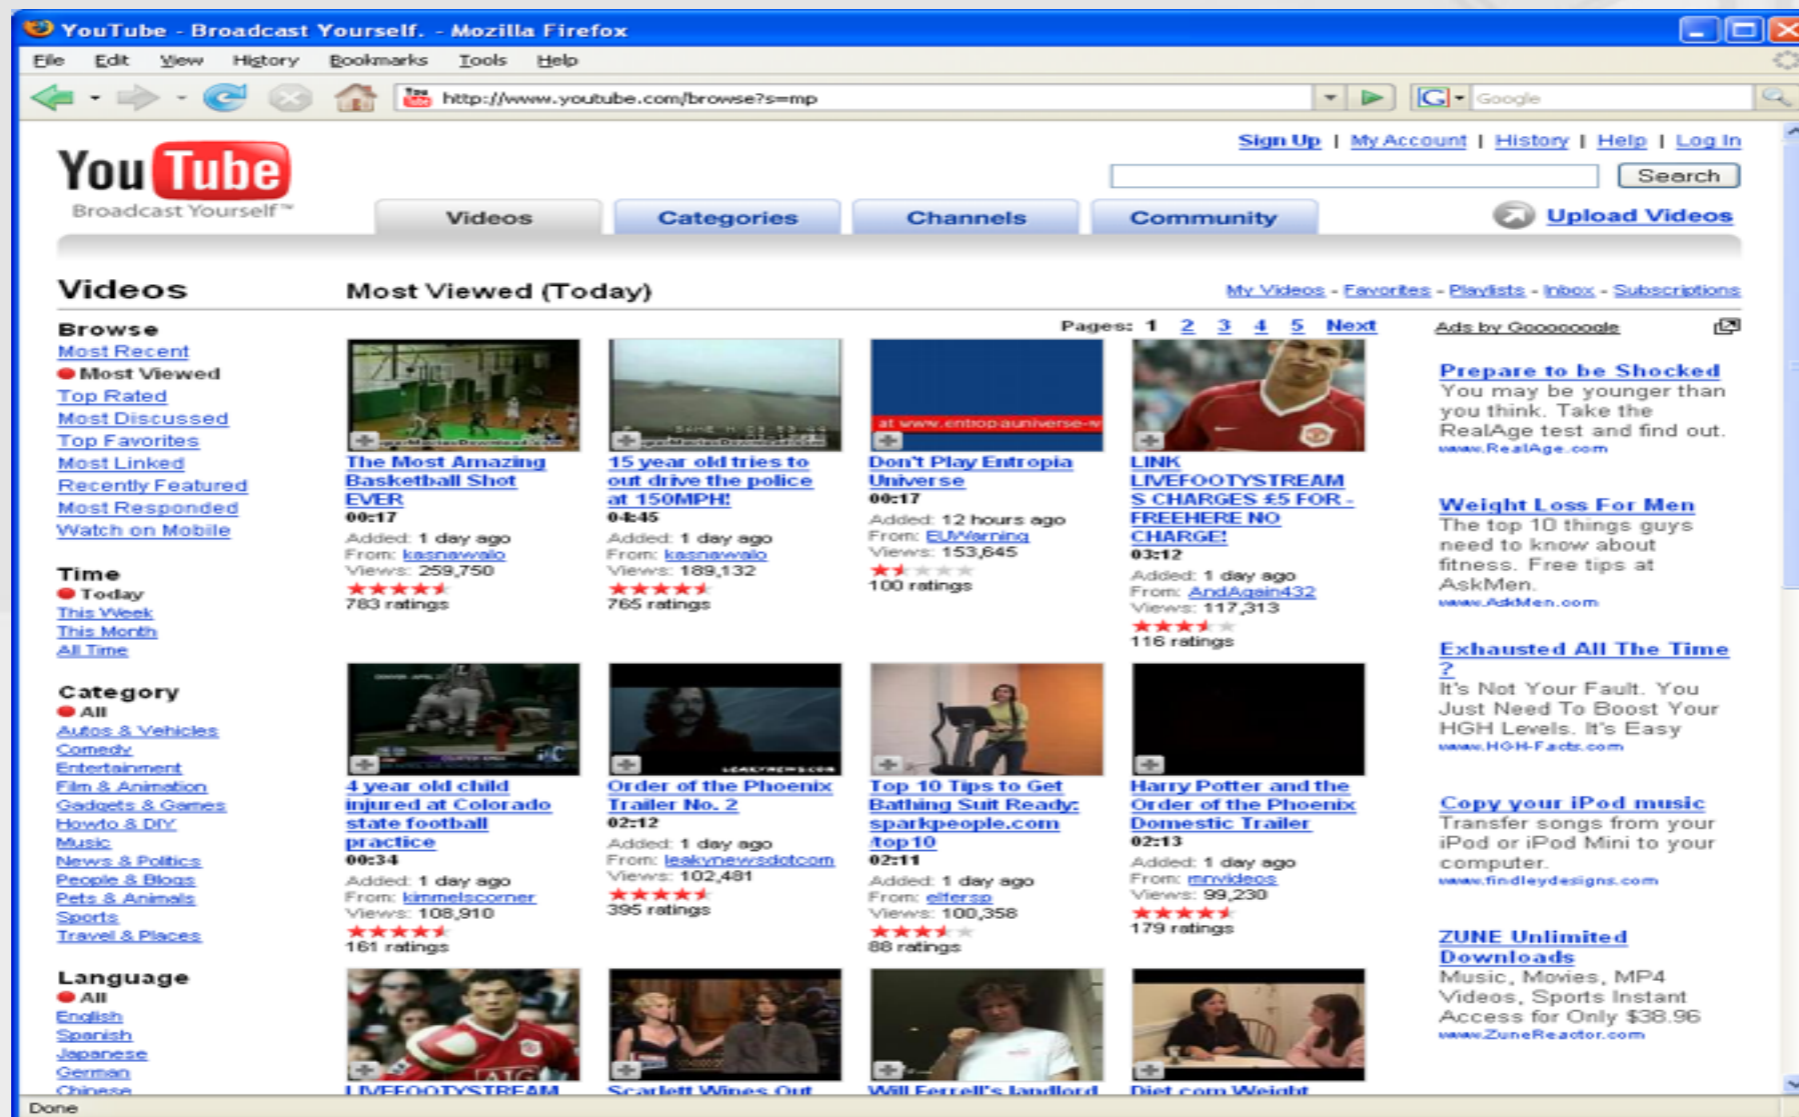

Main methods of digital media retrieval

- **Text-based** digital media retrieval

The Google logo is displayed in its characteristic multi-colored font (blue, red, yellow, green, red).A screenshot of the Google search interface from 2008. It features a search bar, a "Google Search" button, an "I'm Feeling Lucky" button, and links for "Advanced Search", "Preferences", and "Language Tools".

[Advertising Programs](#) - [Business Solutions](#) - [About Google](#) - [Go to Google China](#)


©2008 - [Privacy](#)

- **Content-based** digital media retrieval



Why we need video shots?

a. **Text Retrieval:** Keyword Extraction

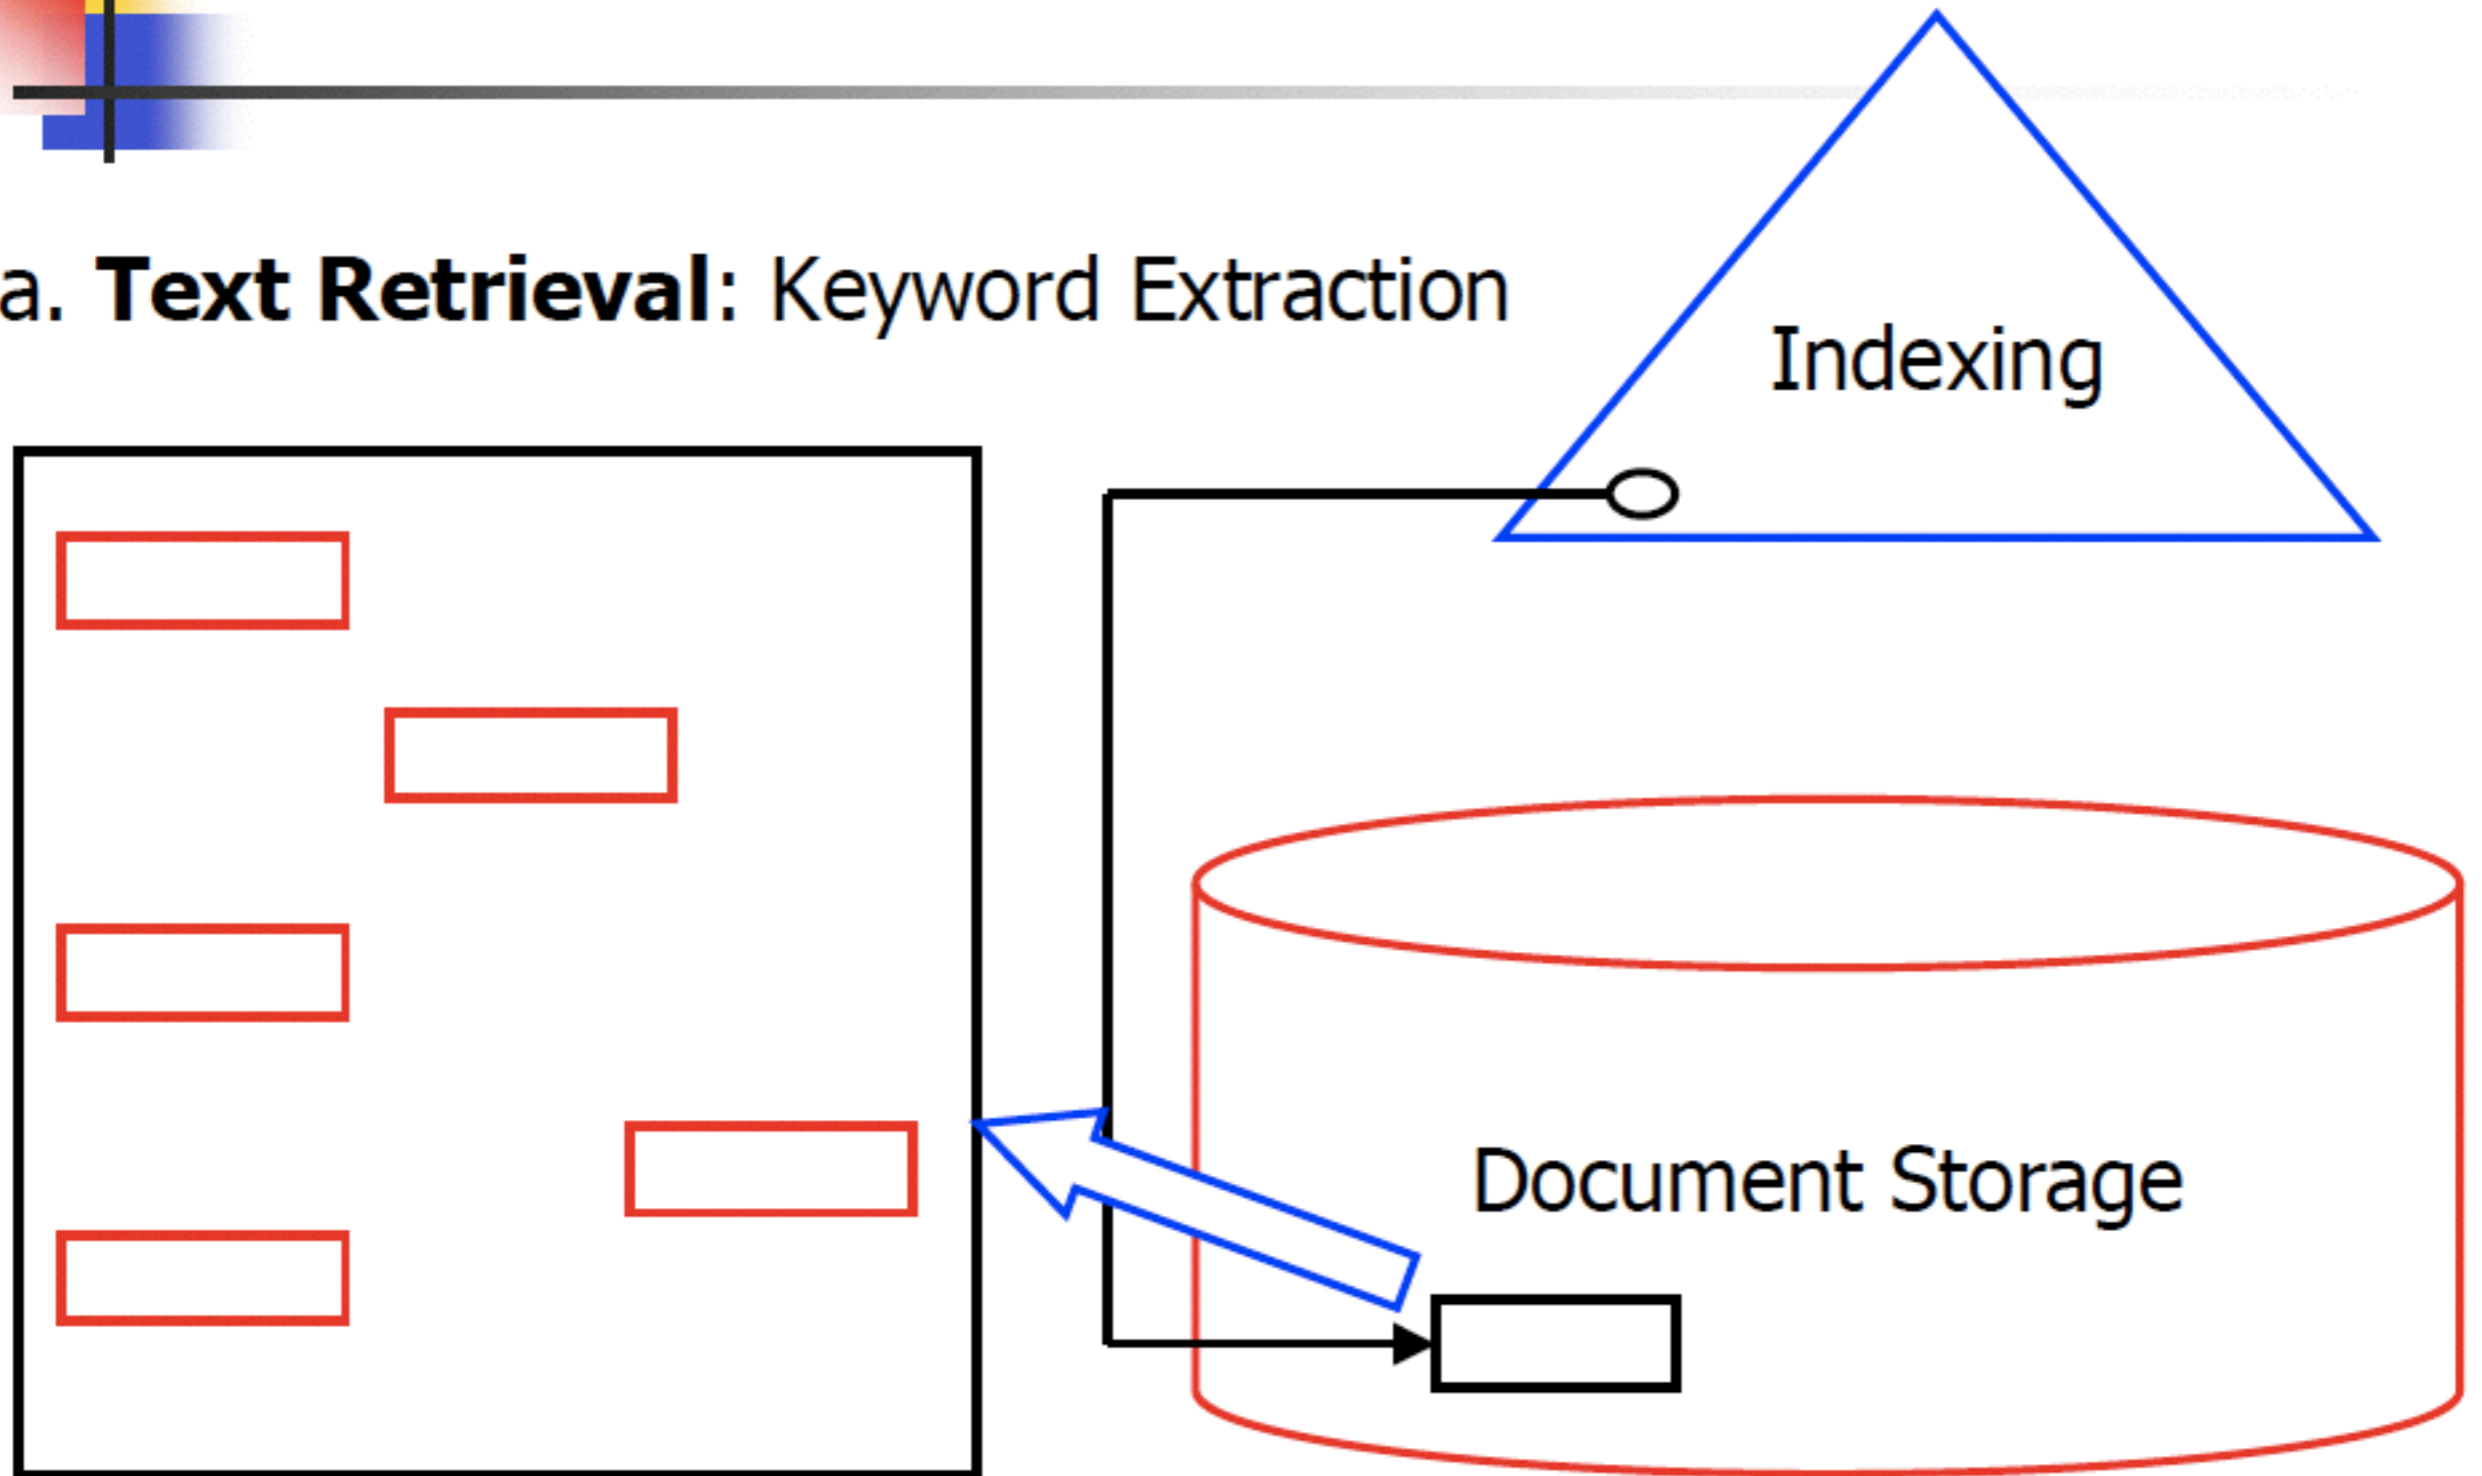

Why we need video shots?


b. Database Query: Entity Extraction

sid	name	login	age	gpa
53666	Jones	jones@cs	18	3.4
53688	Smith	smith@eecs	18	3.2
53650	Smith	smith@math	19	3.8


Indexing





Database Storage

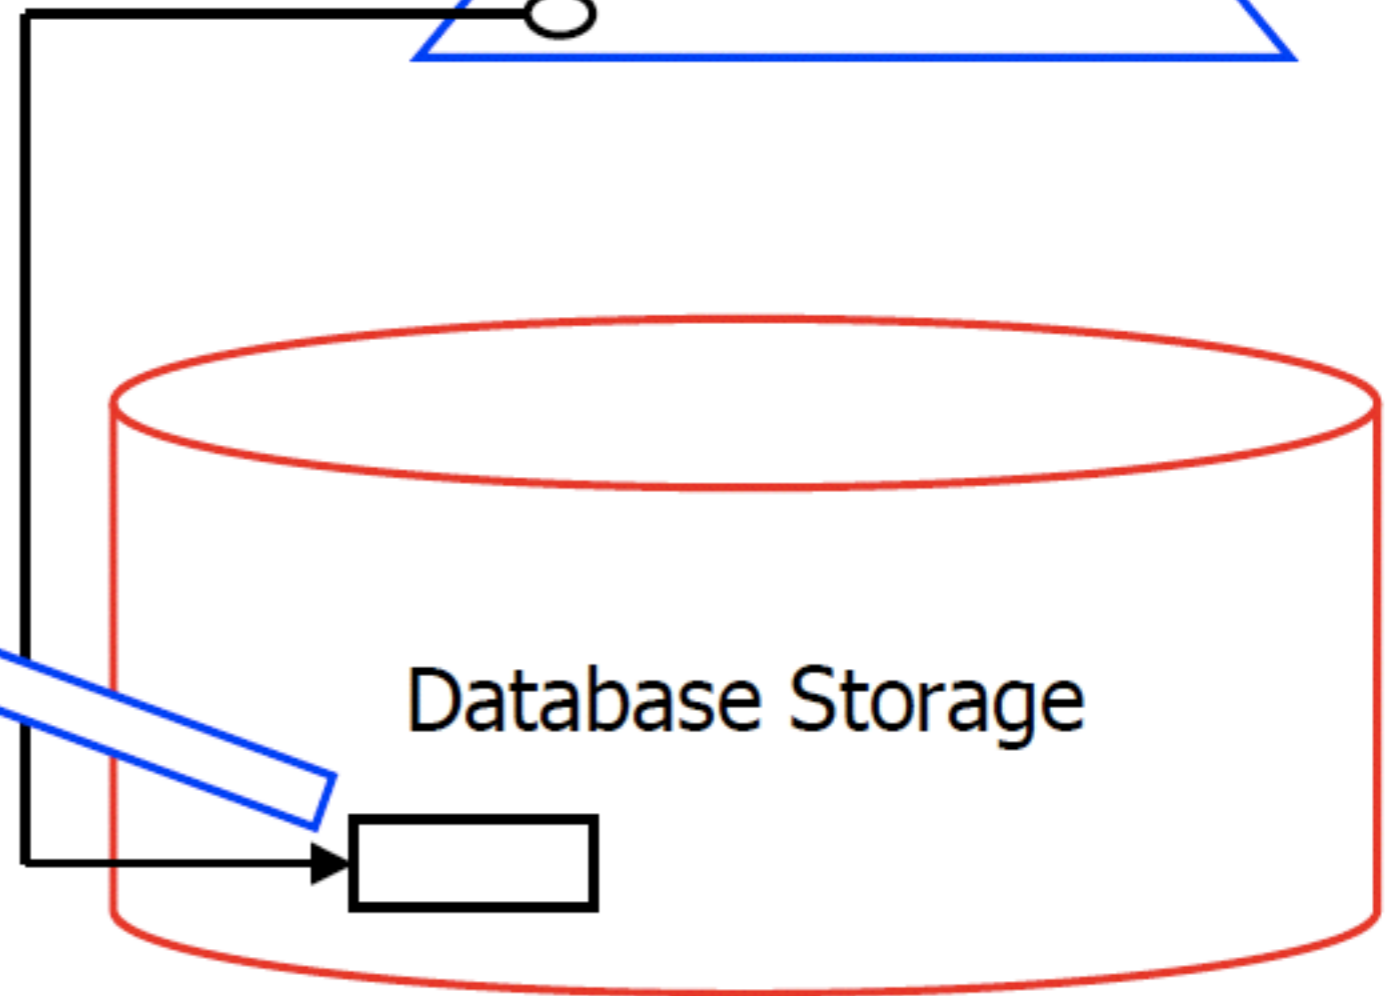

Why we need video shots?

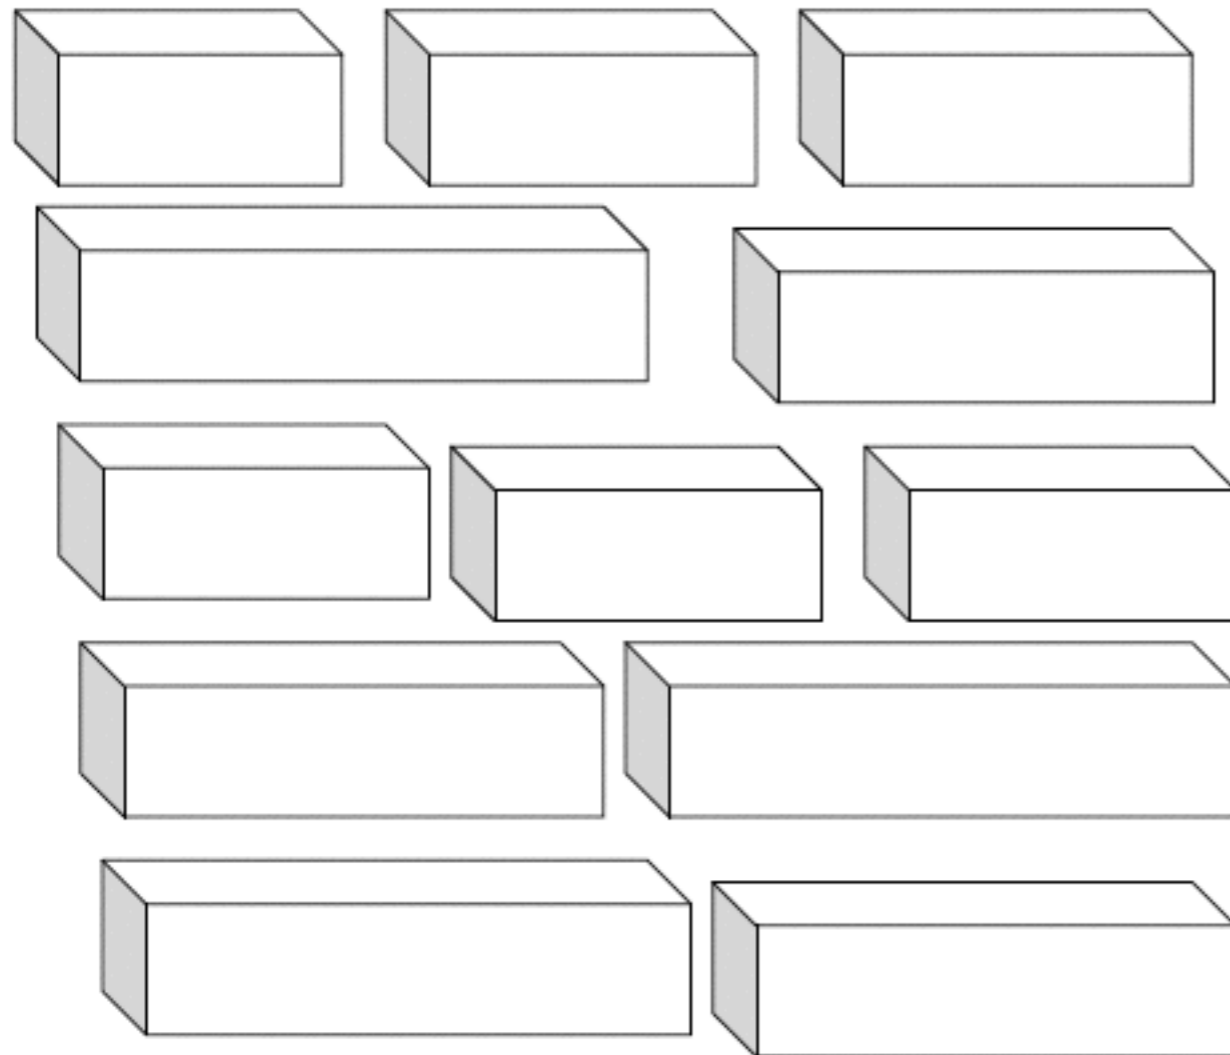

Video Shots in Storage

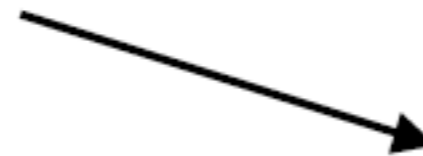
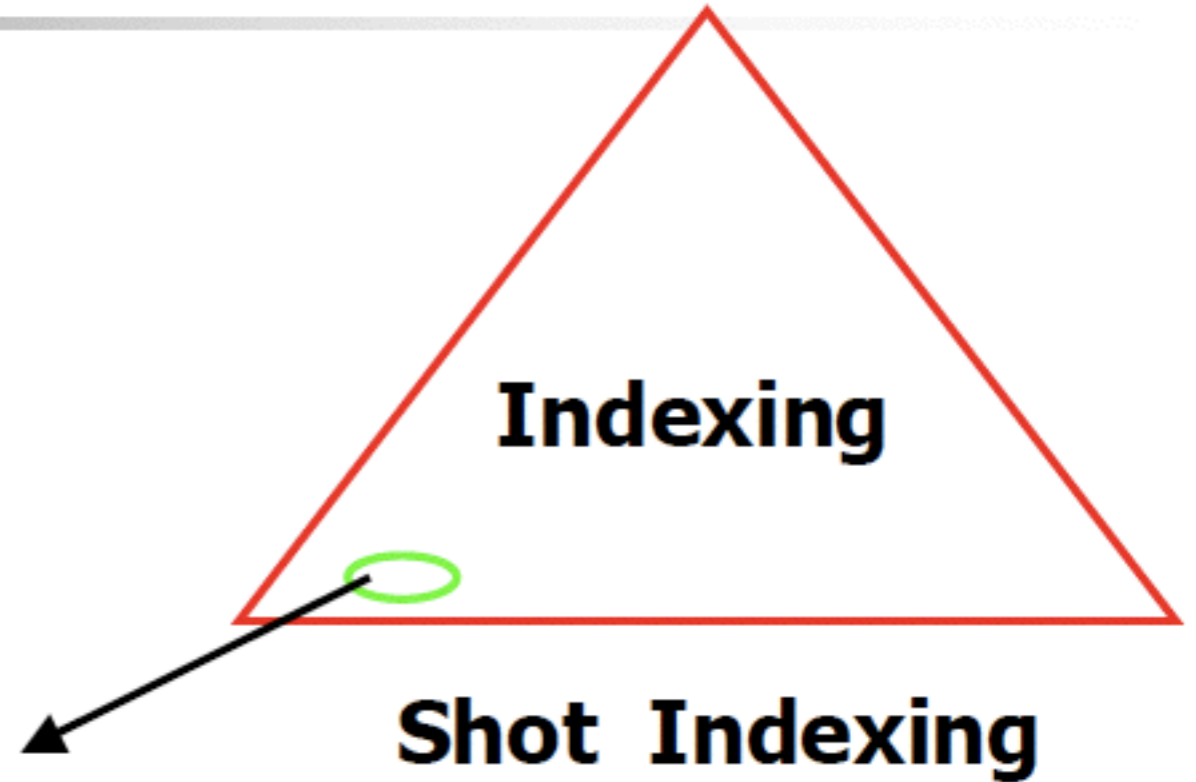


Video shot =?= keyword in video?



Shot is used as basic unit for video indexing!

Storage Database

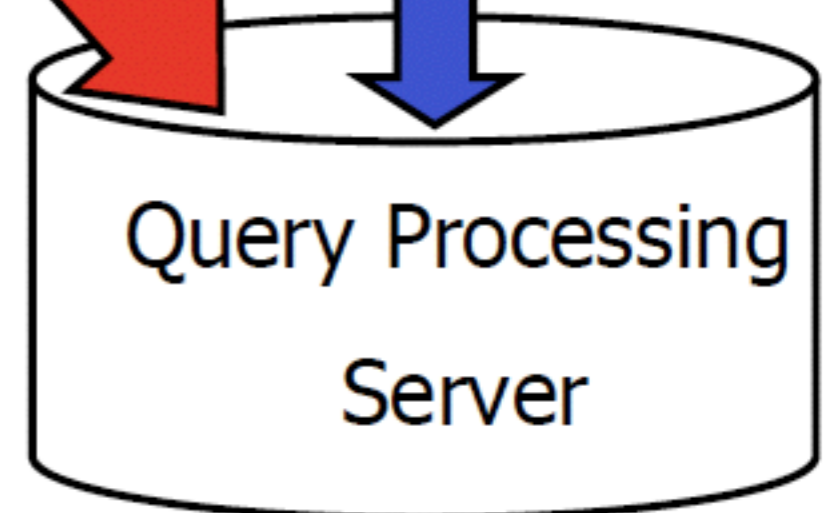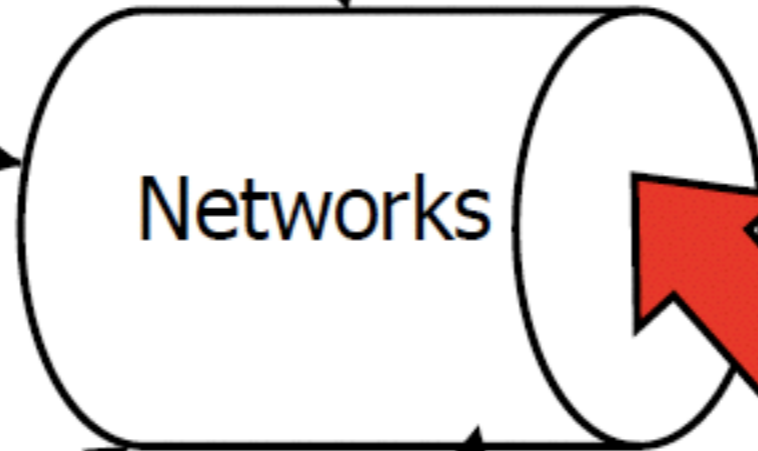


CBVR Overview

- **2 phases:**
 - **Database Population** phase
 - Video shot boundary detection
 - Key Frames selection
 - Feature extraction
 - **Video Retrieval** phase
 - Similarity measure




Overview (cont.)

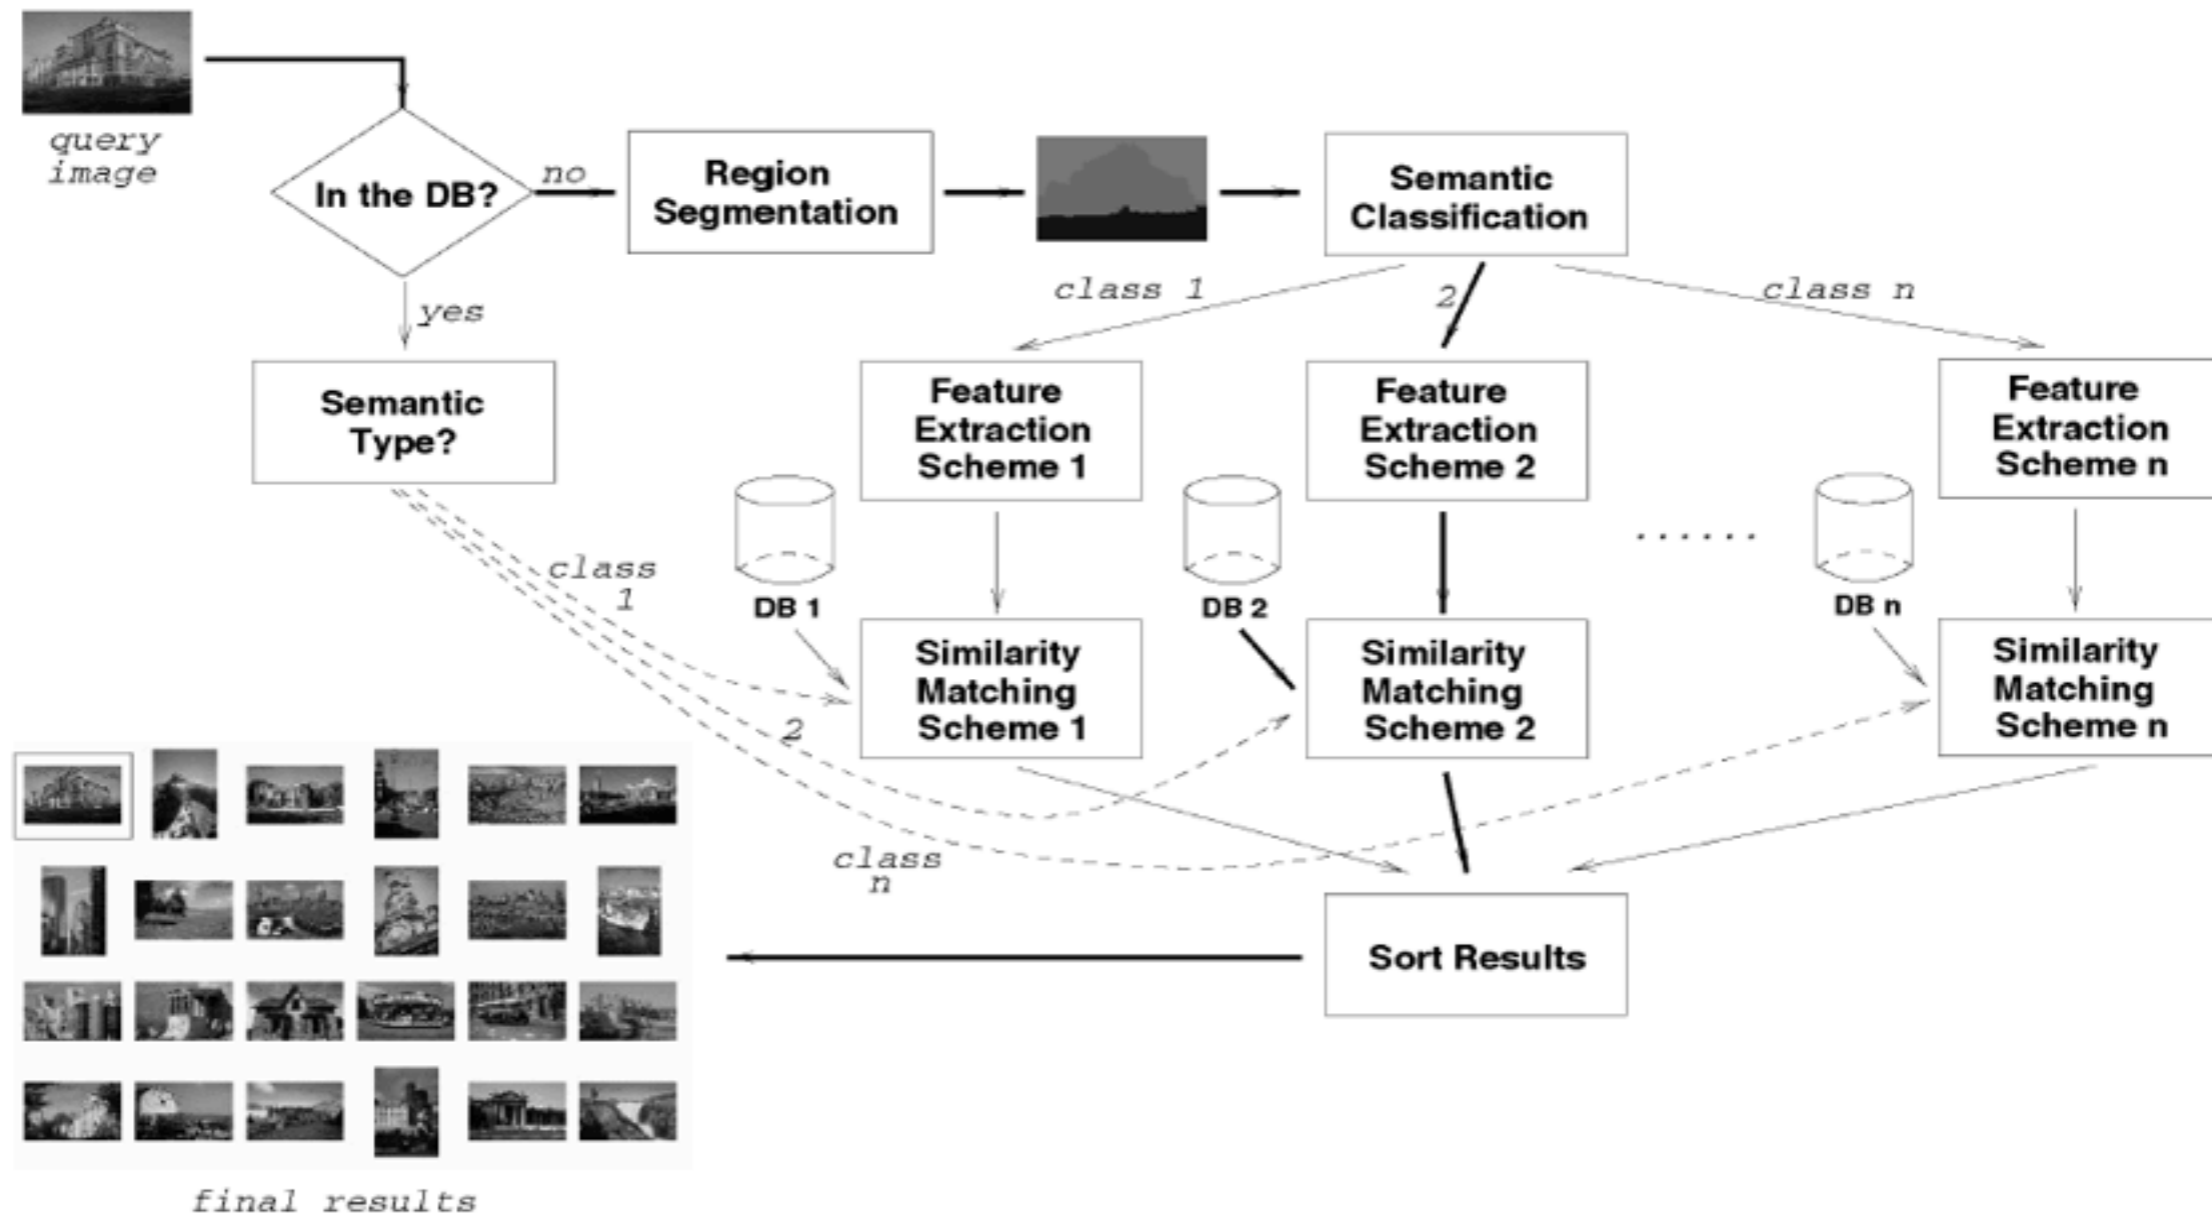

[Wang, Li, Wiederhold, 2001]

Structuralizing video data

- **semantic content layers**, e.g., scenes and shots in a video program.
 - These layers are erased when they are displayed for audience, which weakens the ability for user dealing with raw video data.

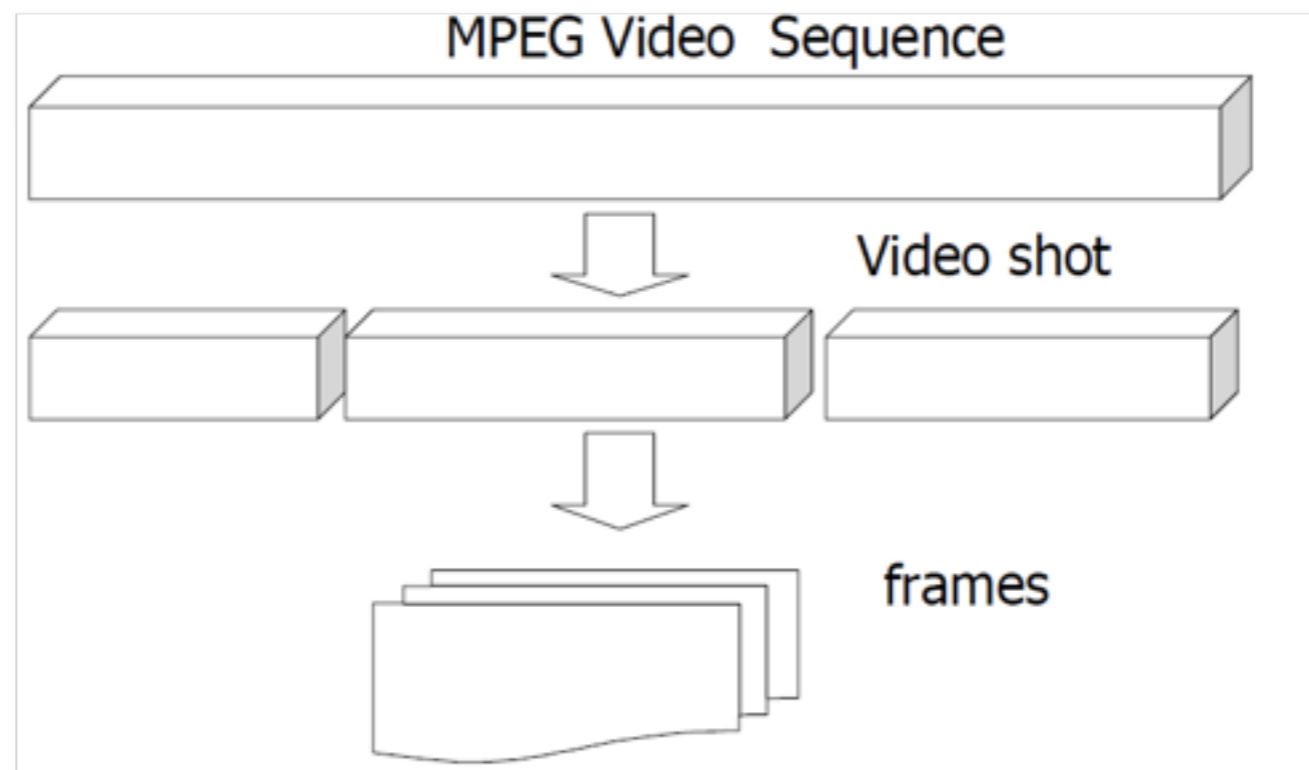

Fundamental definitions in video structurization

- Frame (帧)
- Shot (镜头)
- Key frame (关键帧)
- Scene (场景)
- Group (组)

Video



Scenes



Shots




Frames



a. Scene Cuts:

Sudden change of video content or focus

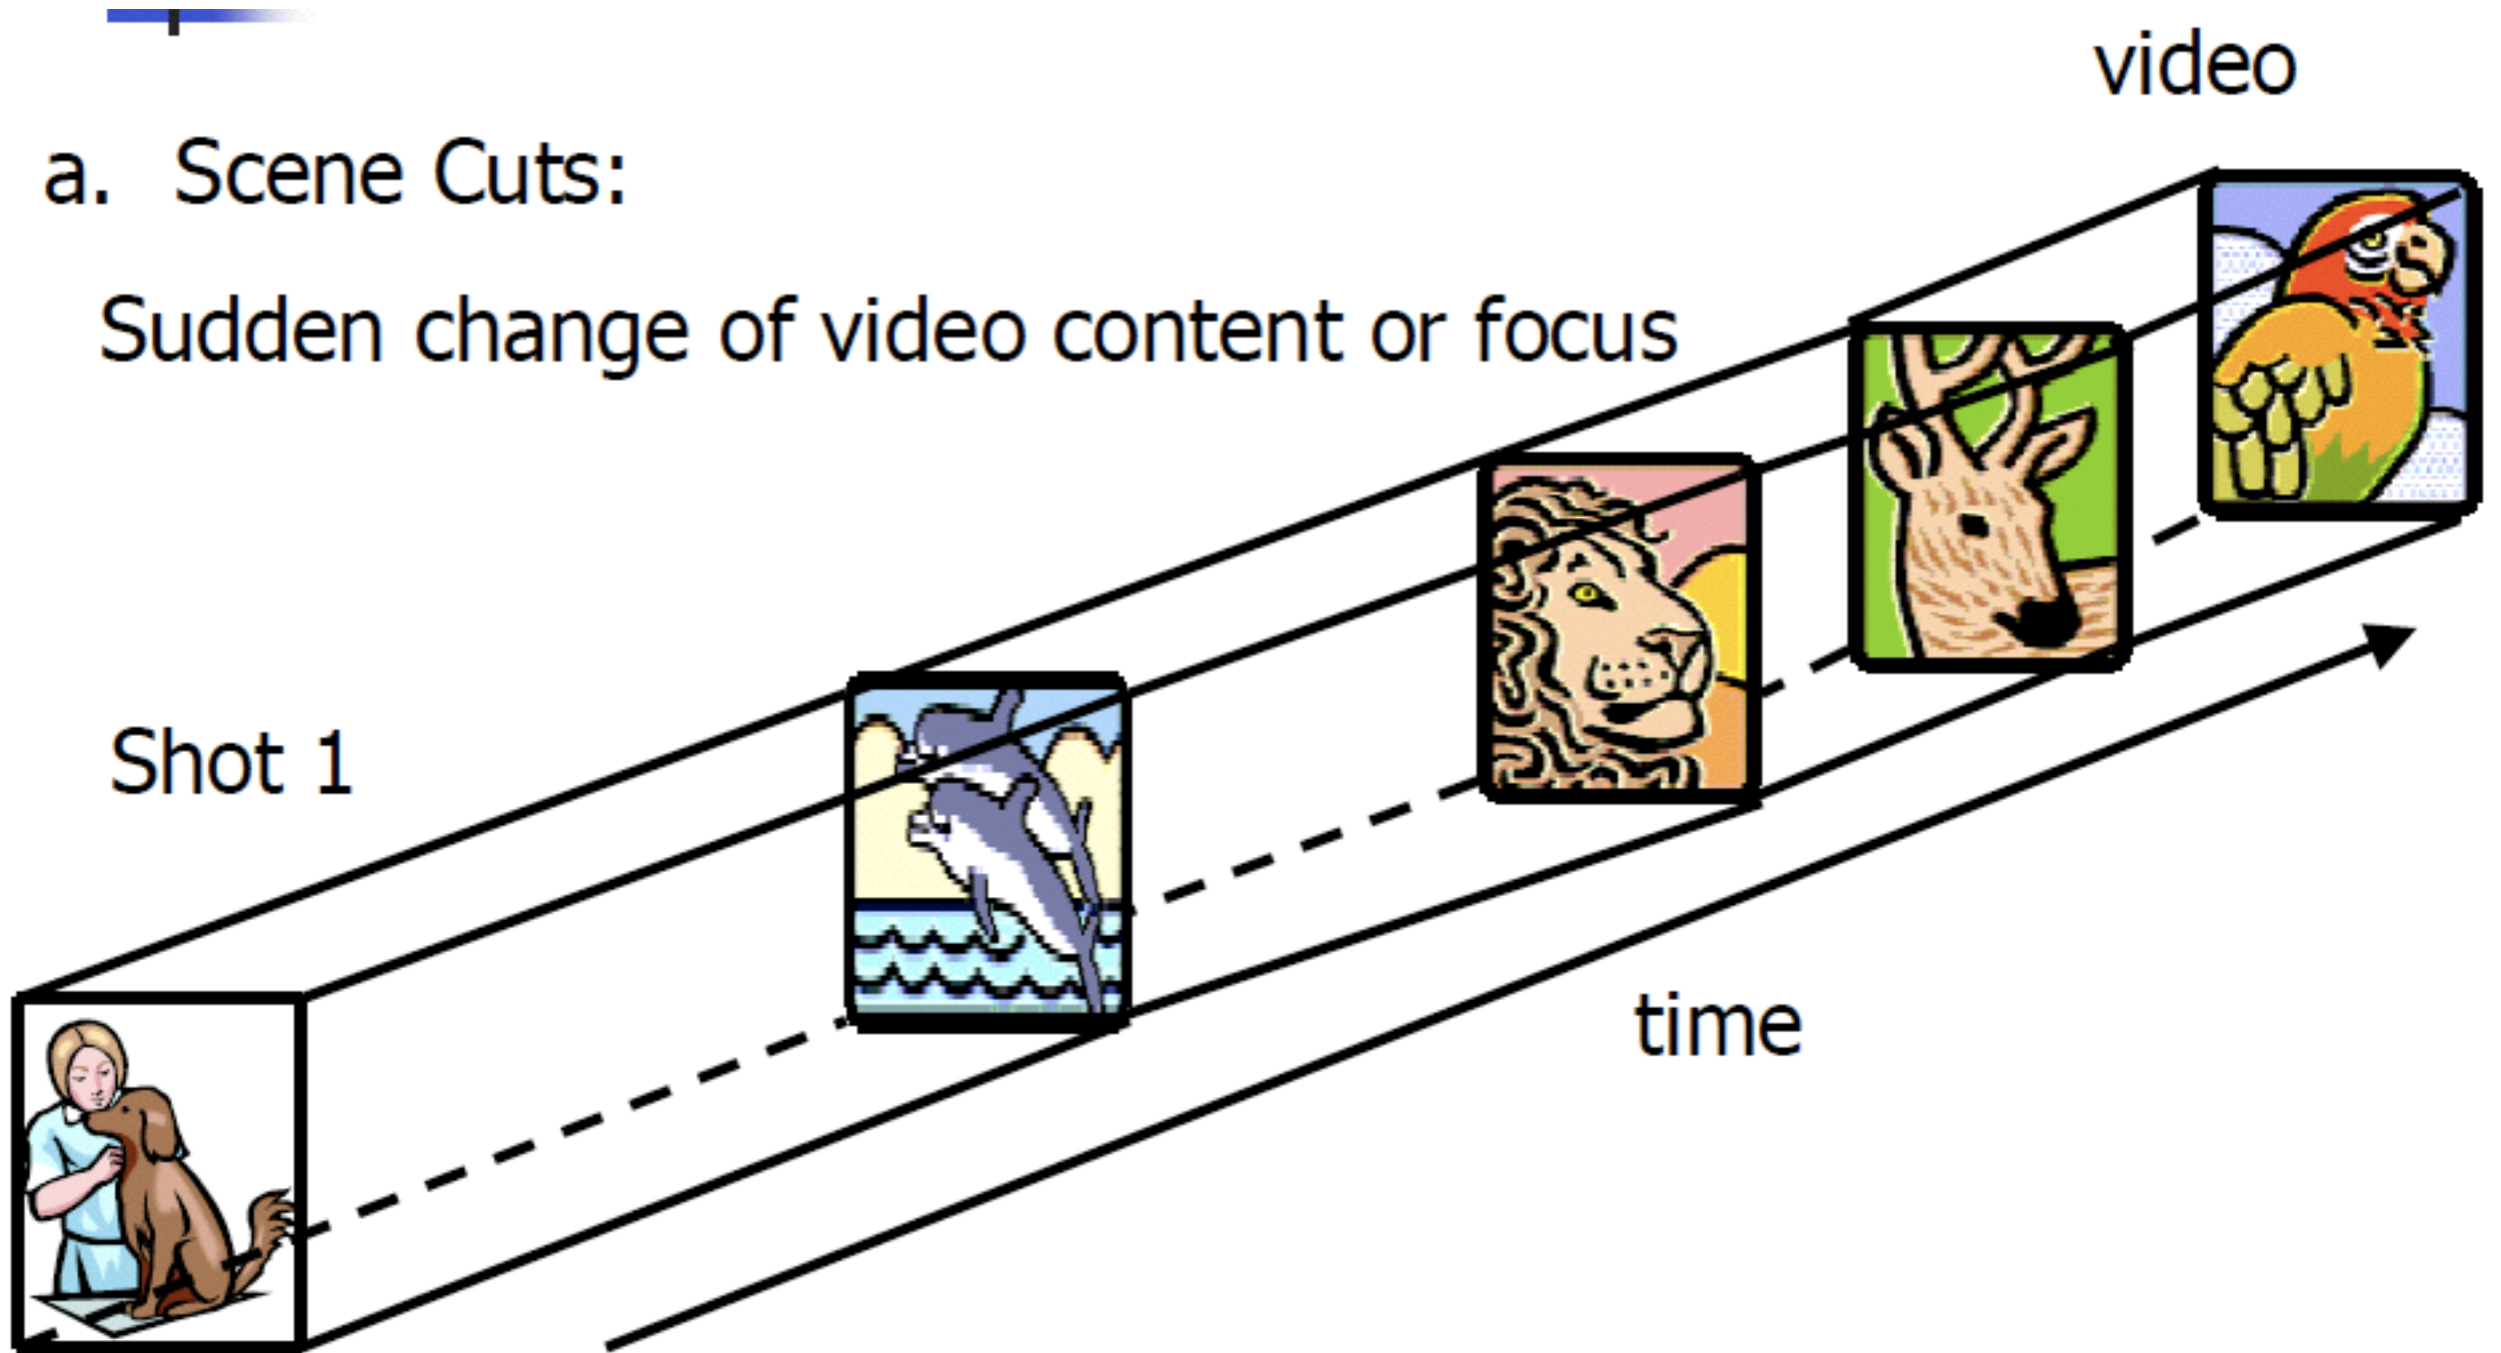

Proposal

- Analyze a video stream
- Segment the stream into shots
- Index shots using extracted features
 - Camera work characteristics (Long, Middle, Short ...)
 - Color representations
- Browsing methods and user interfaces




Desired Video Interaction



- Focus on fast visual browsing.
- Ability to grasp idea of lengthy video in short time.
- Not simply fast forward.
- Challenge: find and manage essential visual cues, then present them visually in an effective way



Viewer-Video Interaction: Conceptual Model

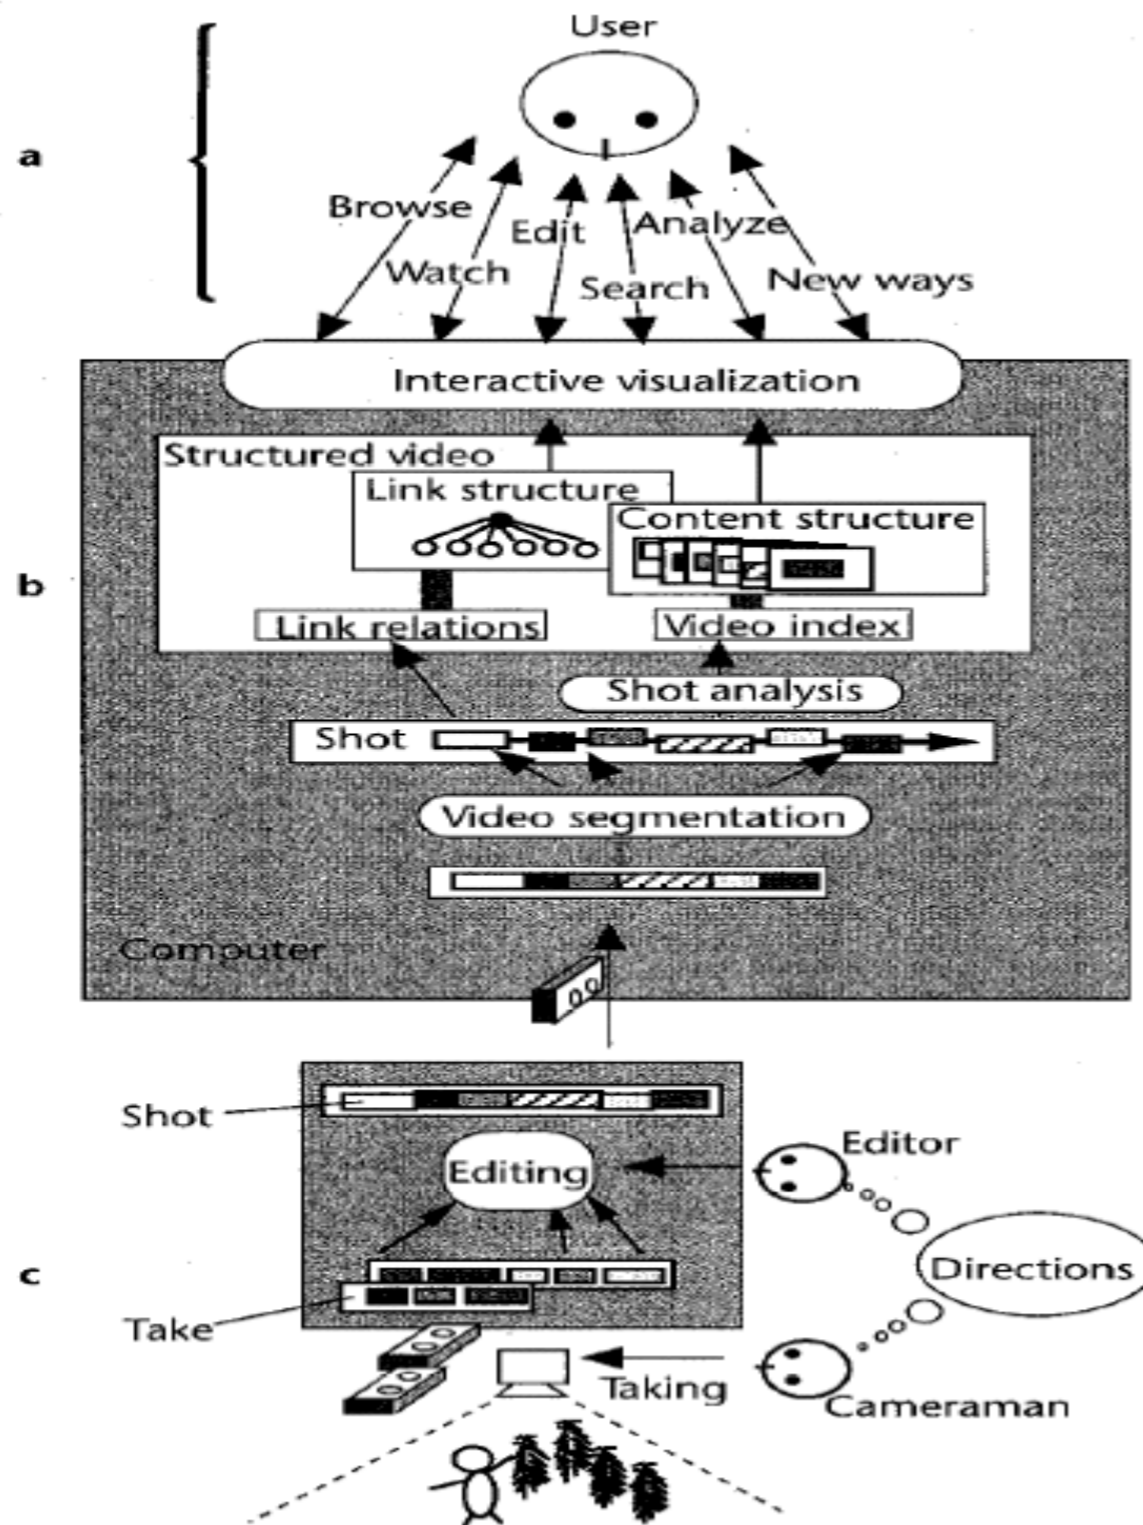


a) Viewer Interaction

b) Video Computing


c) Video Production & Editing

Video Production

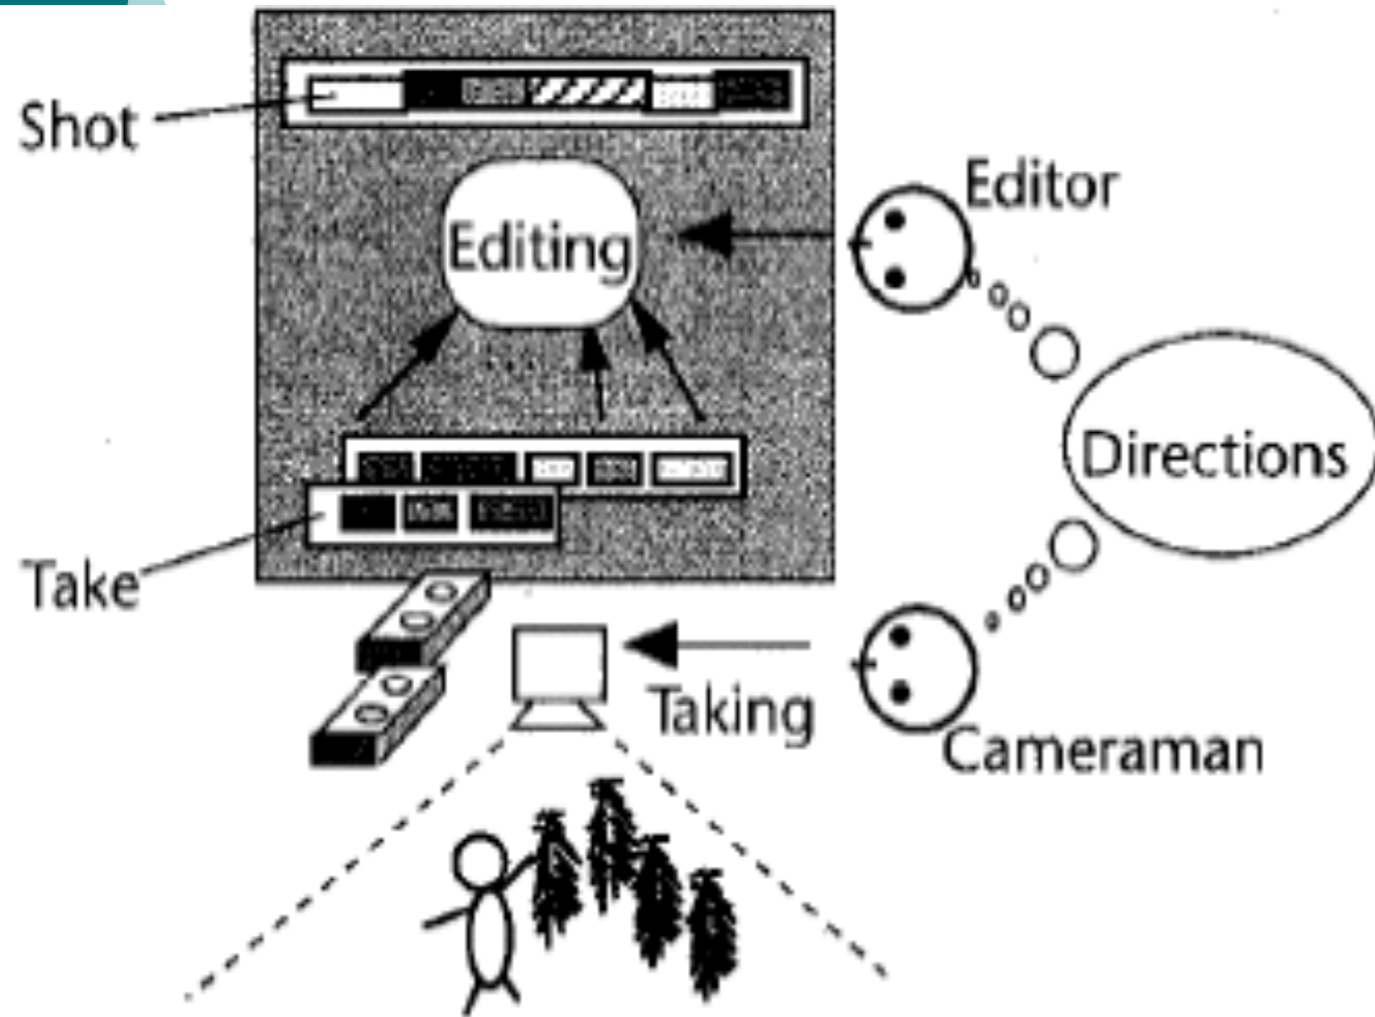

- Key Concepts:
 - Take: continuous video
 - Cut: separates takes
 - Camera characteristics
 - Pan, tilt, zoom, etc.
 - Shot: edited takes
- Resulting video contains embedded info: cut points, camera characteristics

Video Computing

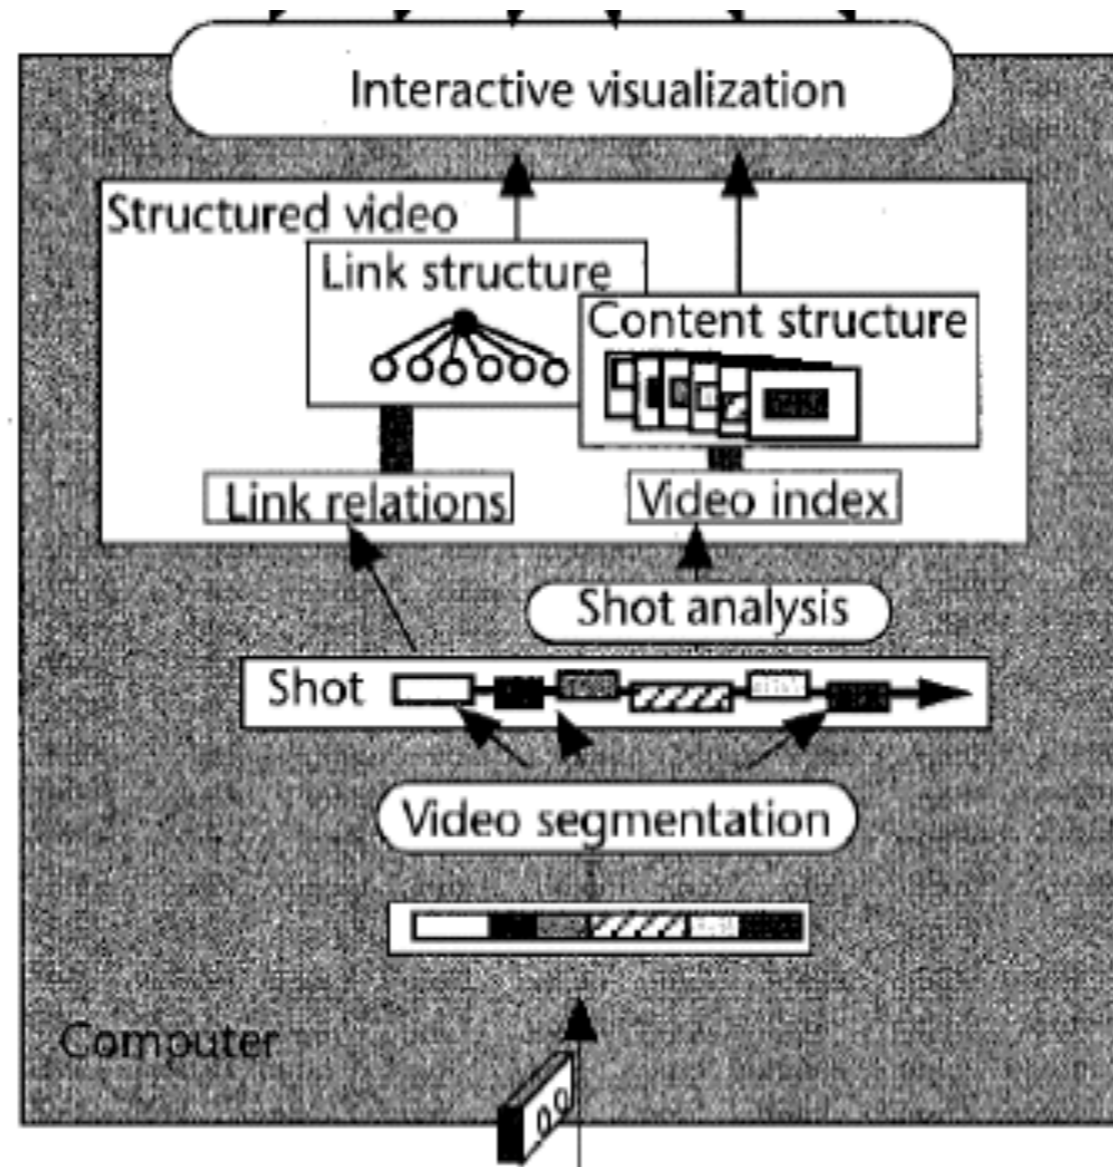

- Main Function: Make the implied video structure explicit.



Video Segmentation: Problems

- Traditional Cut Detection – detect differences between frames using inter-frame comparisons (intensity, RGB, motion vectors).
- Mis-detection due to rapid object motion, slow motion, animation, strobos, fading, wiping, dissolving, etc.
- Result: Low successful detection rate.

Basic video segmentation metrics

- Pair-wise comparison

- Pixel-level

$$DP_i(k, l) = \begin{cases} 1 & \text{if } |P_i(k, l) - P_{i+1}(k, l)| > t \\ 0 & \text{otherwise} \end{cases}$$

- Sensitive to camera movement and motion

$$\frac{\sum_{k,l=1}^{M,N} DP_i(k, l)}{M * N} * 100 > T$$

- Block-level (Likelihood ratio)

- Can tolerate small motion

$$\frac{\left[\frac{S_i + S_{i+1}}{2} + \left(\frac{m_i - m_{i+1}}{2} \right)^2 \right]^2}{S_i * S_{i+1}} > t$$



m_i : mean intensity

S_i : corresponding variance

Basic video segmentation metrics

How to measure statistical property of video frames?

Color Histogram

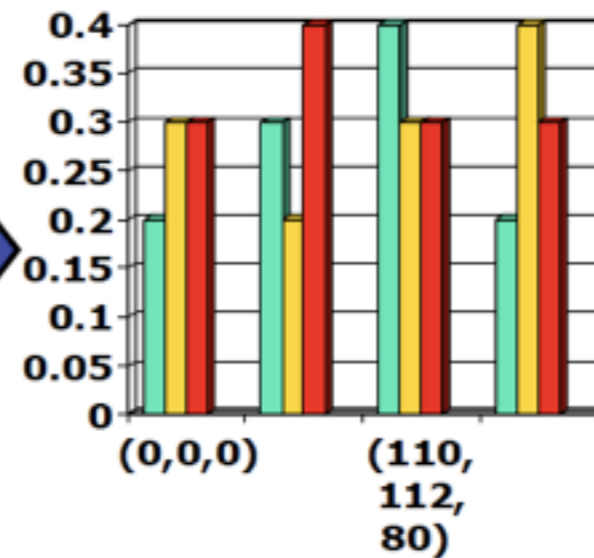





Basic video segmentation metrics

- Histogram comparison
 - Basic
 - Tolerate motion better
 - χ^2 -test
 - Color level can also be used but only the MSB to save the number of bins


$$SD_i = \sum_{j=1}^G |H_i(j) - H_{i+1}(j)|$$

$$SD_i = \sum_{j=1}^G \frac{|H_i(j) - H_{i+1}(j)|^2}{H_{i+1}(j)}$$


Sample of using histogram

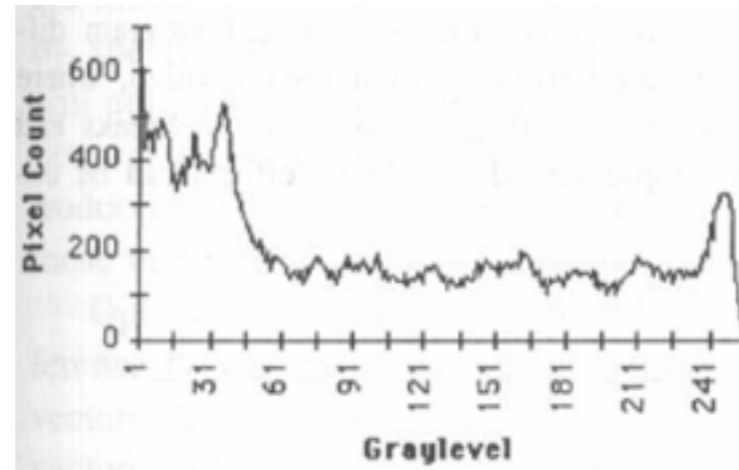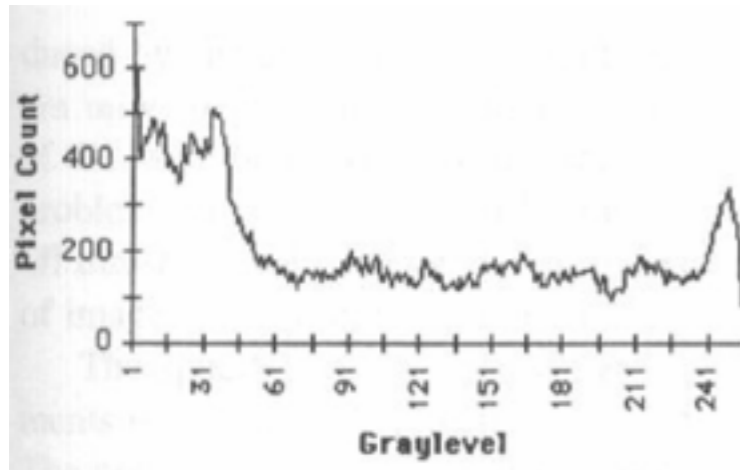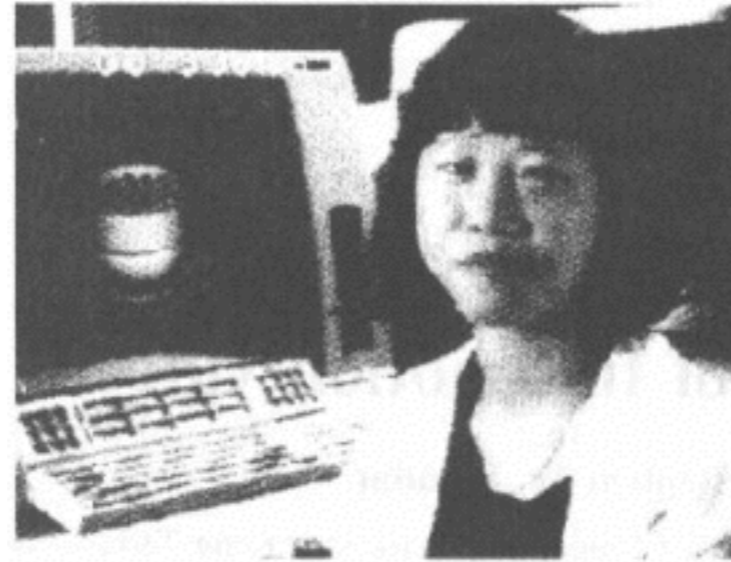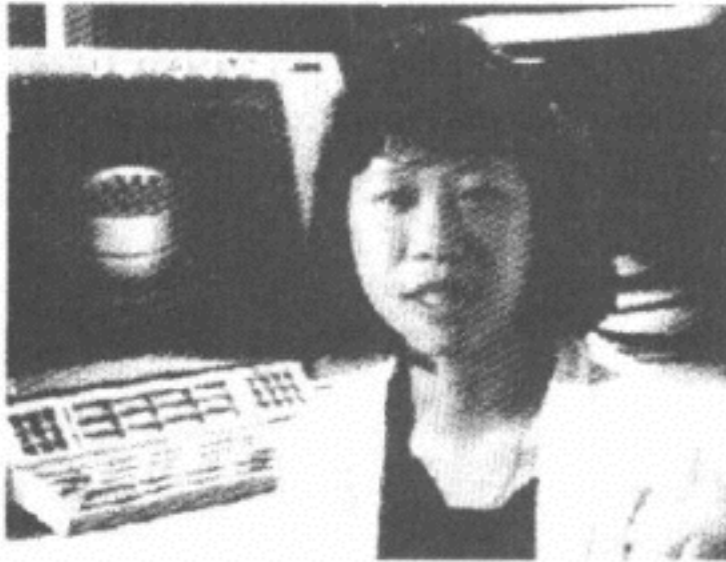

Scene Cut

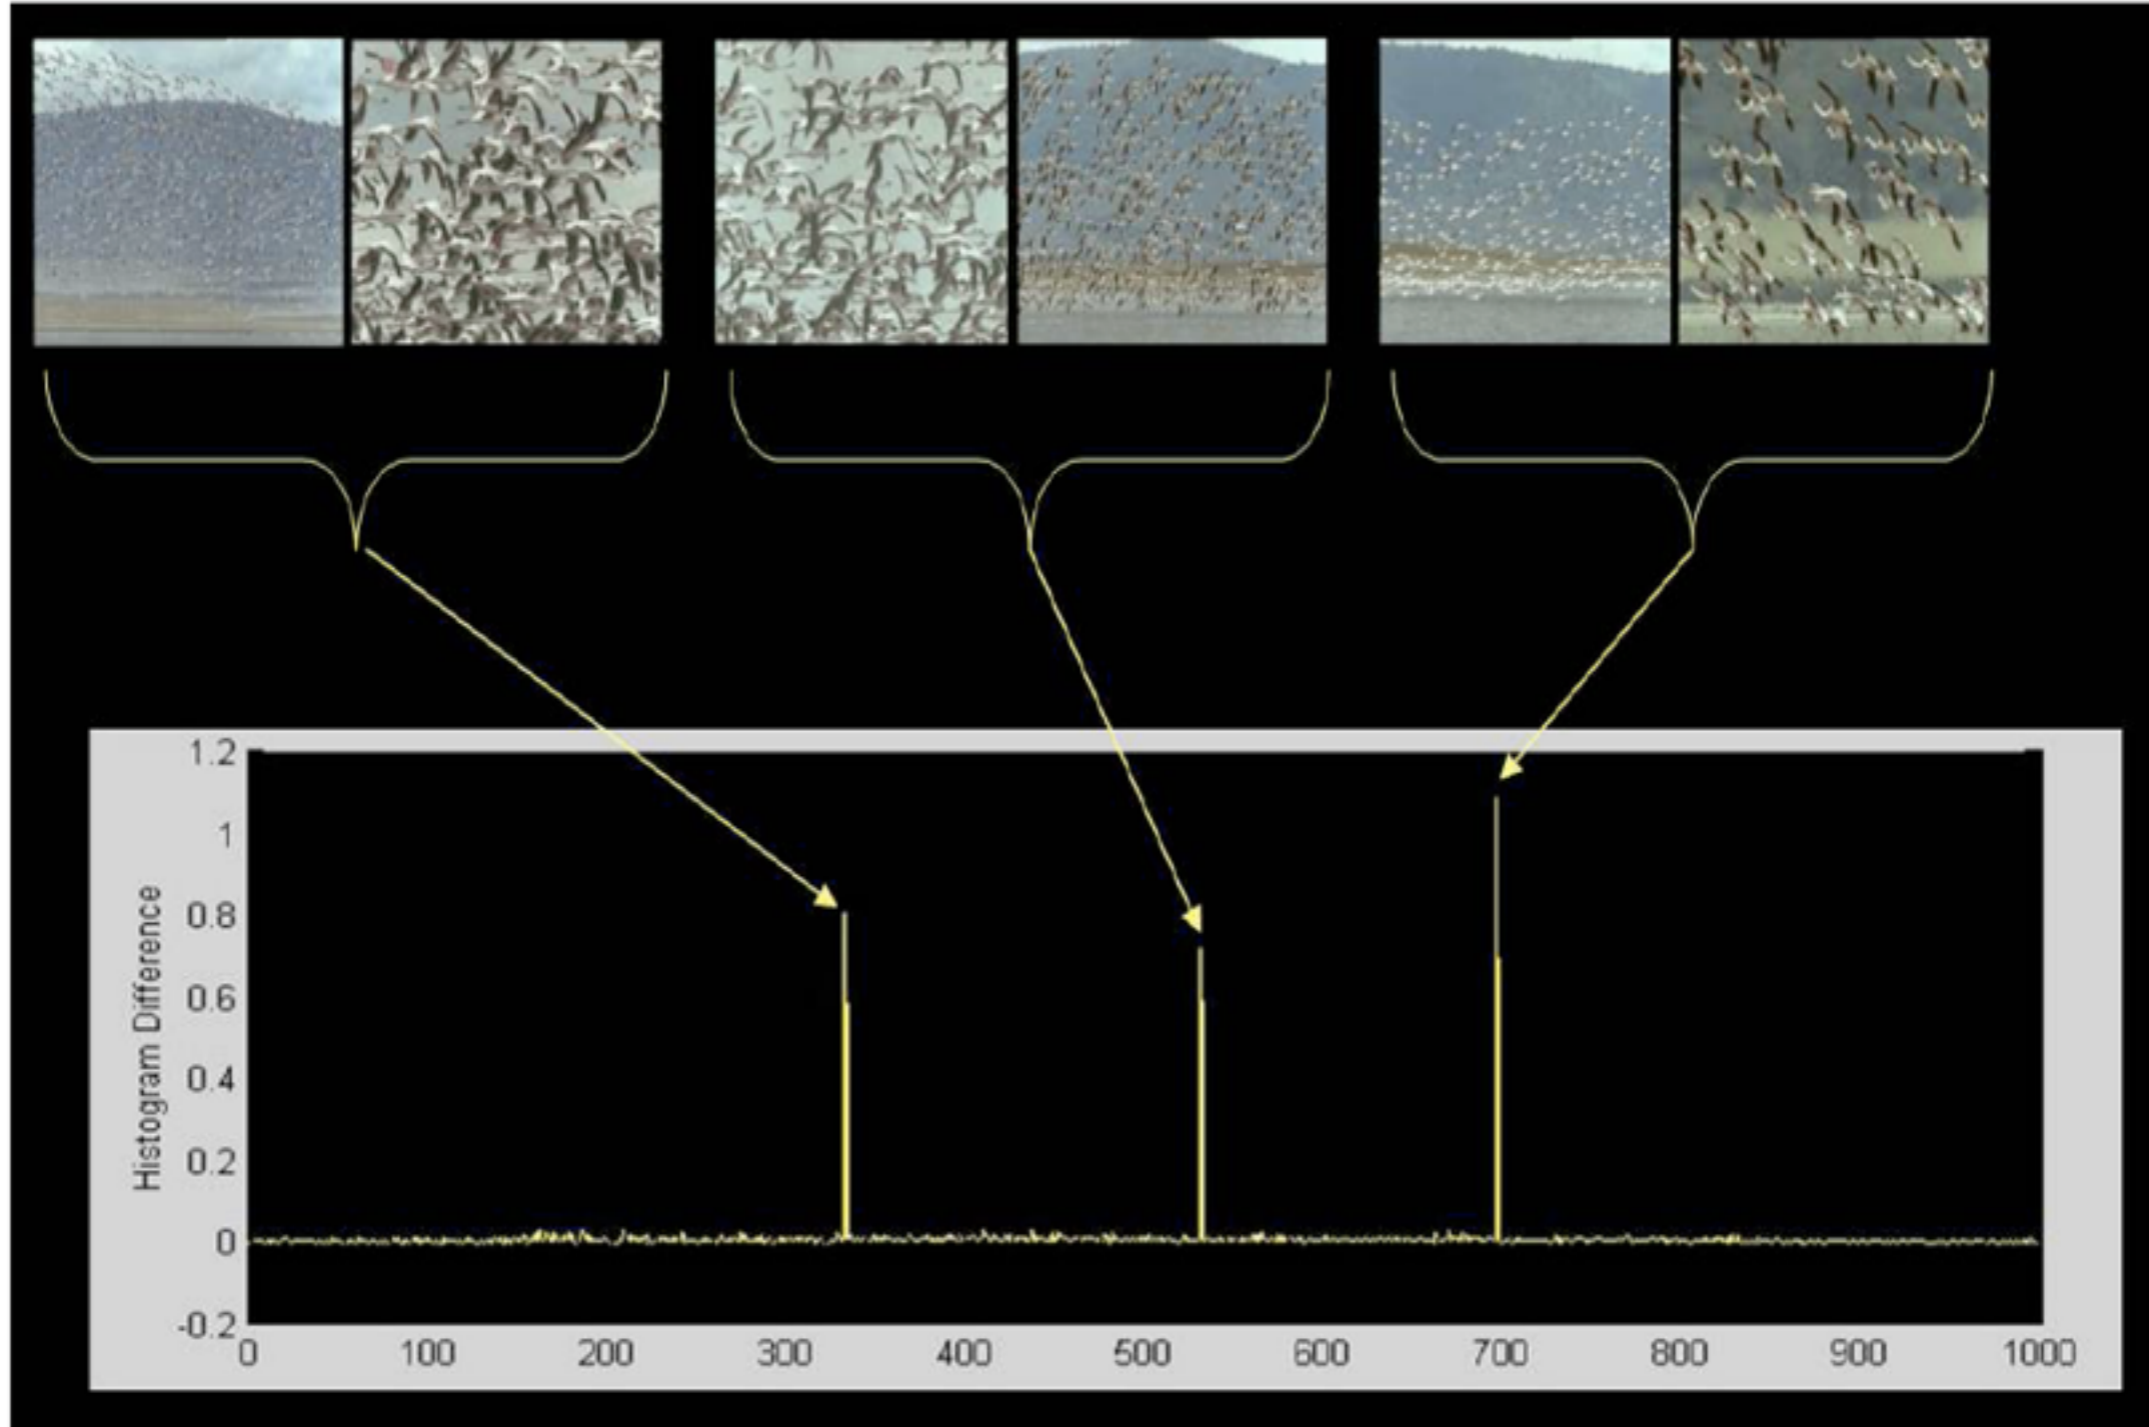

Gradual transition detection

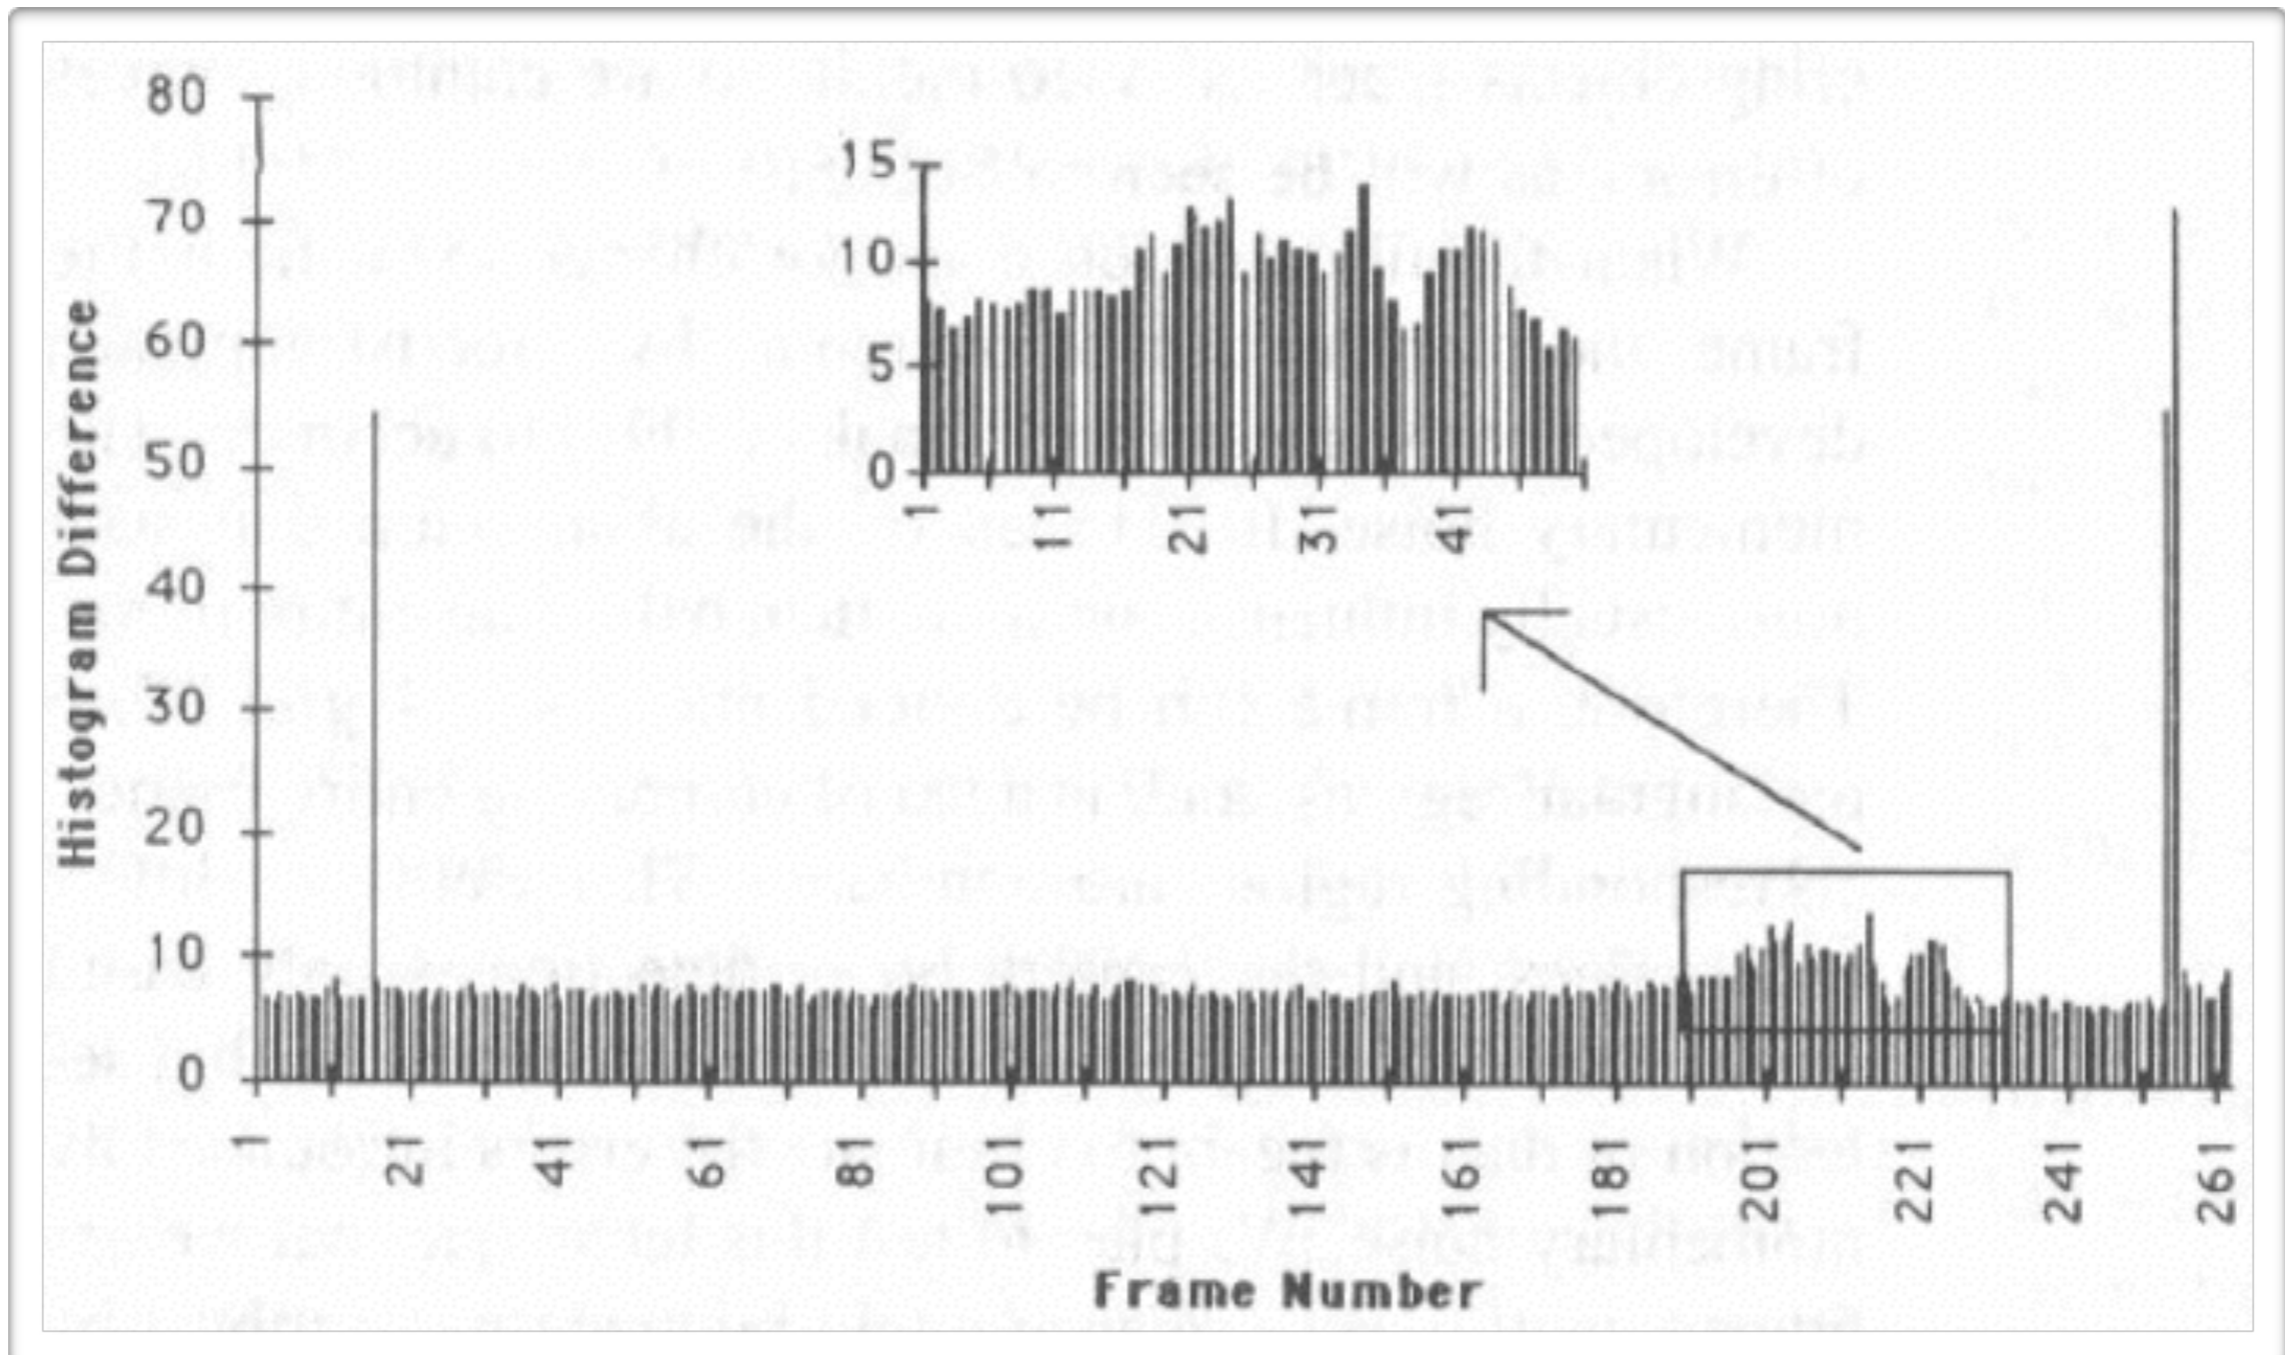

Gradual transition detection

- Twin-comparison
 - Use two thresholds T_b and T_s to accommodate both **short-term** and **long-term** transitions
 - Differences of (F_1, F_2) , (F_2, F_3) , (F_3, F_4) are small, but difference of (F_1, F_4) is still big



1

2

3

4

- **Twin-comparison**

- F_s — the potential beginning frame of the transition
- F_e — the ending frame of the transition

scan frame

if ($\text{Diff}(F_i) \geq T_b$)

 detect as camera break

else if ($T_b > \text{Diff}(F_i) \geq T_s$)

$F_s \leftarrow F_i$

$i \leftarrow i + 1$

 while ($\text{Diff}(F_i) \geq T_s$)


$i \leftarrow i + 1$

 if ($\text{Diff}(F_s, F_i) \geq T_b$)

$F_e \leftarrow F_i$

Threshold selection (T_b , T_s)

- The distribution of frame-to-frame differences has a high and sharp peak near the small value, which is caused by noise instead of transition and assumed to follow Gaussian distribution (μ , σ).
- Choose $T_b = \mu + \alpha\sigma$, $\alpha \in [5, 6]$
- Choose T_s to be greater than the mean difference and on the right slope of M
- $T_s \in [8, 10]$, constant over samples

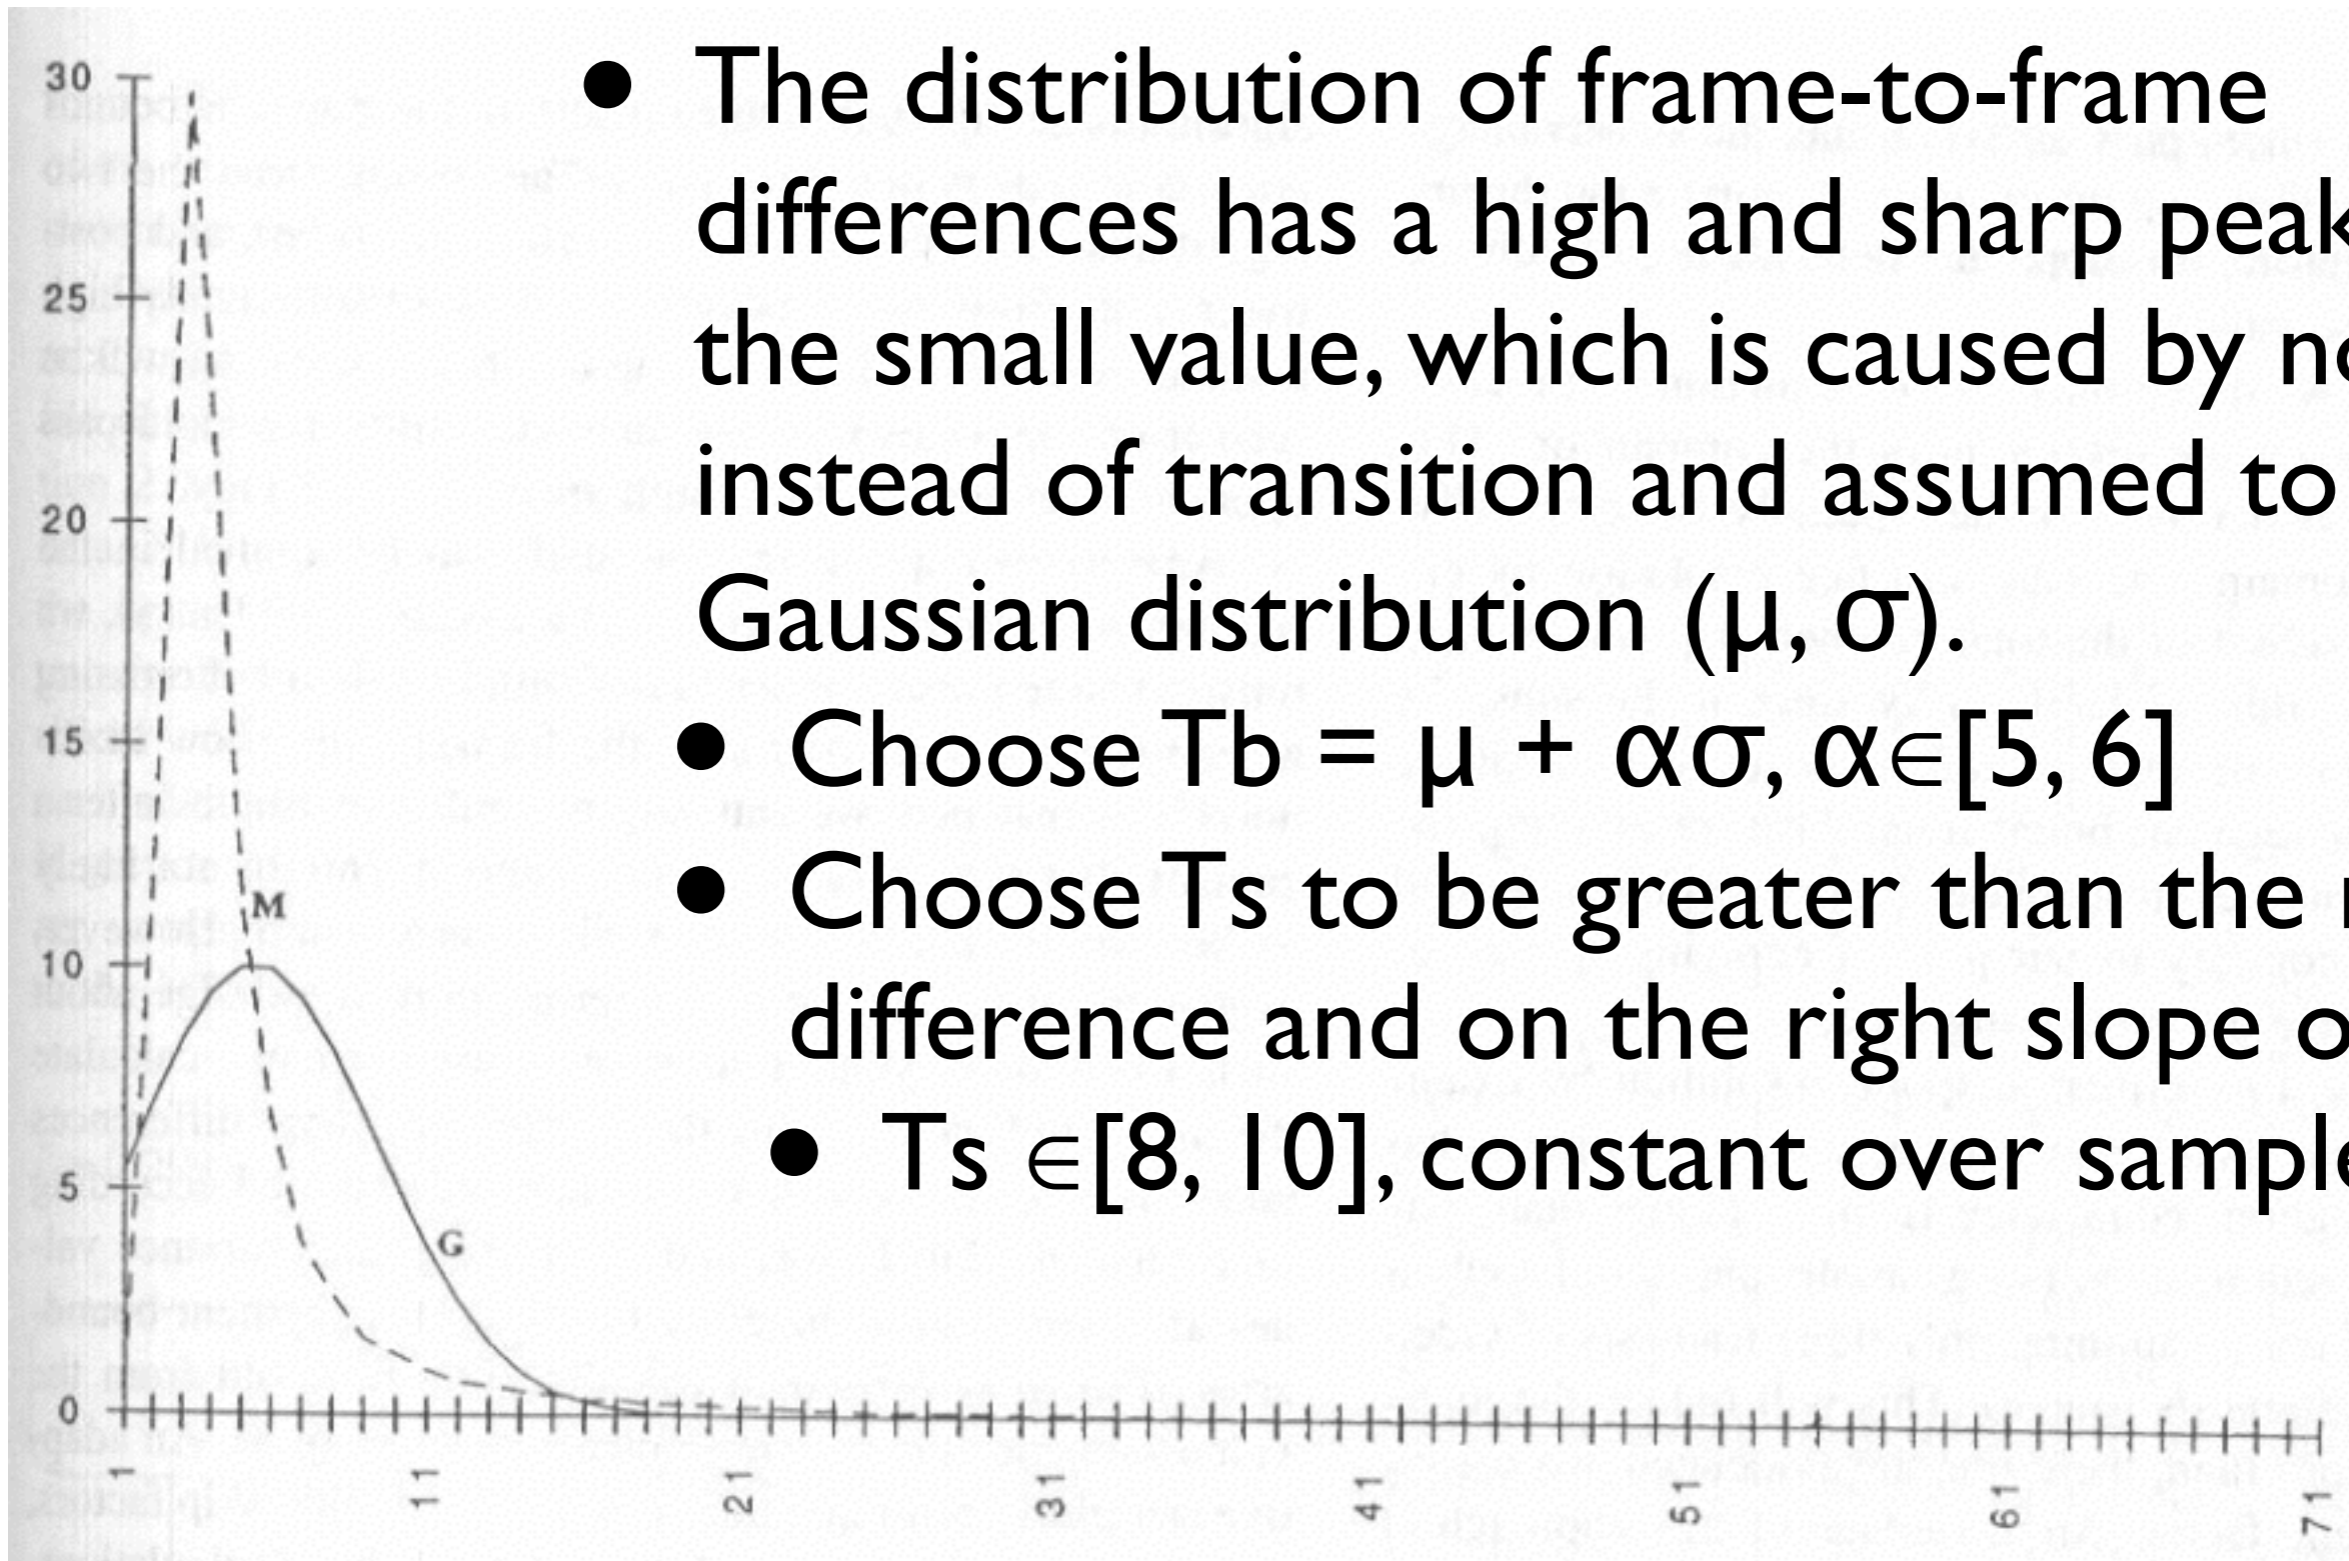


Multi-pass approach

- Scanning all frames could be computationally hard
- Temporal skipping is more useful
 - e.g. one out of every 10 frames
 - Better for detecting gradual transition
 - May miss camera break
 - May get false detection (distance increased)
- Multi-pass approach
 - First pass, use either pair-wise or histogram with large skip factor and smaller T_b to collect the potential regions.
 - Second pass, two methods may be applied together (hybrid) to search the candidate regions while increasing the confidence.

Distinguish camera movement

- To distinguish gradual transitions from changes made by camera movements
- Basic approach— observing **optical flow** via motion vectors

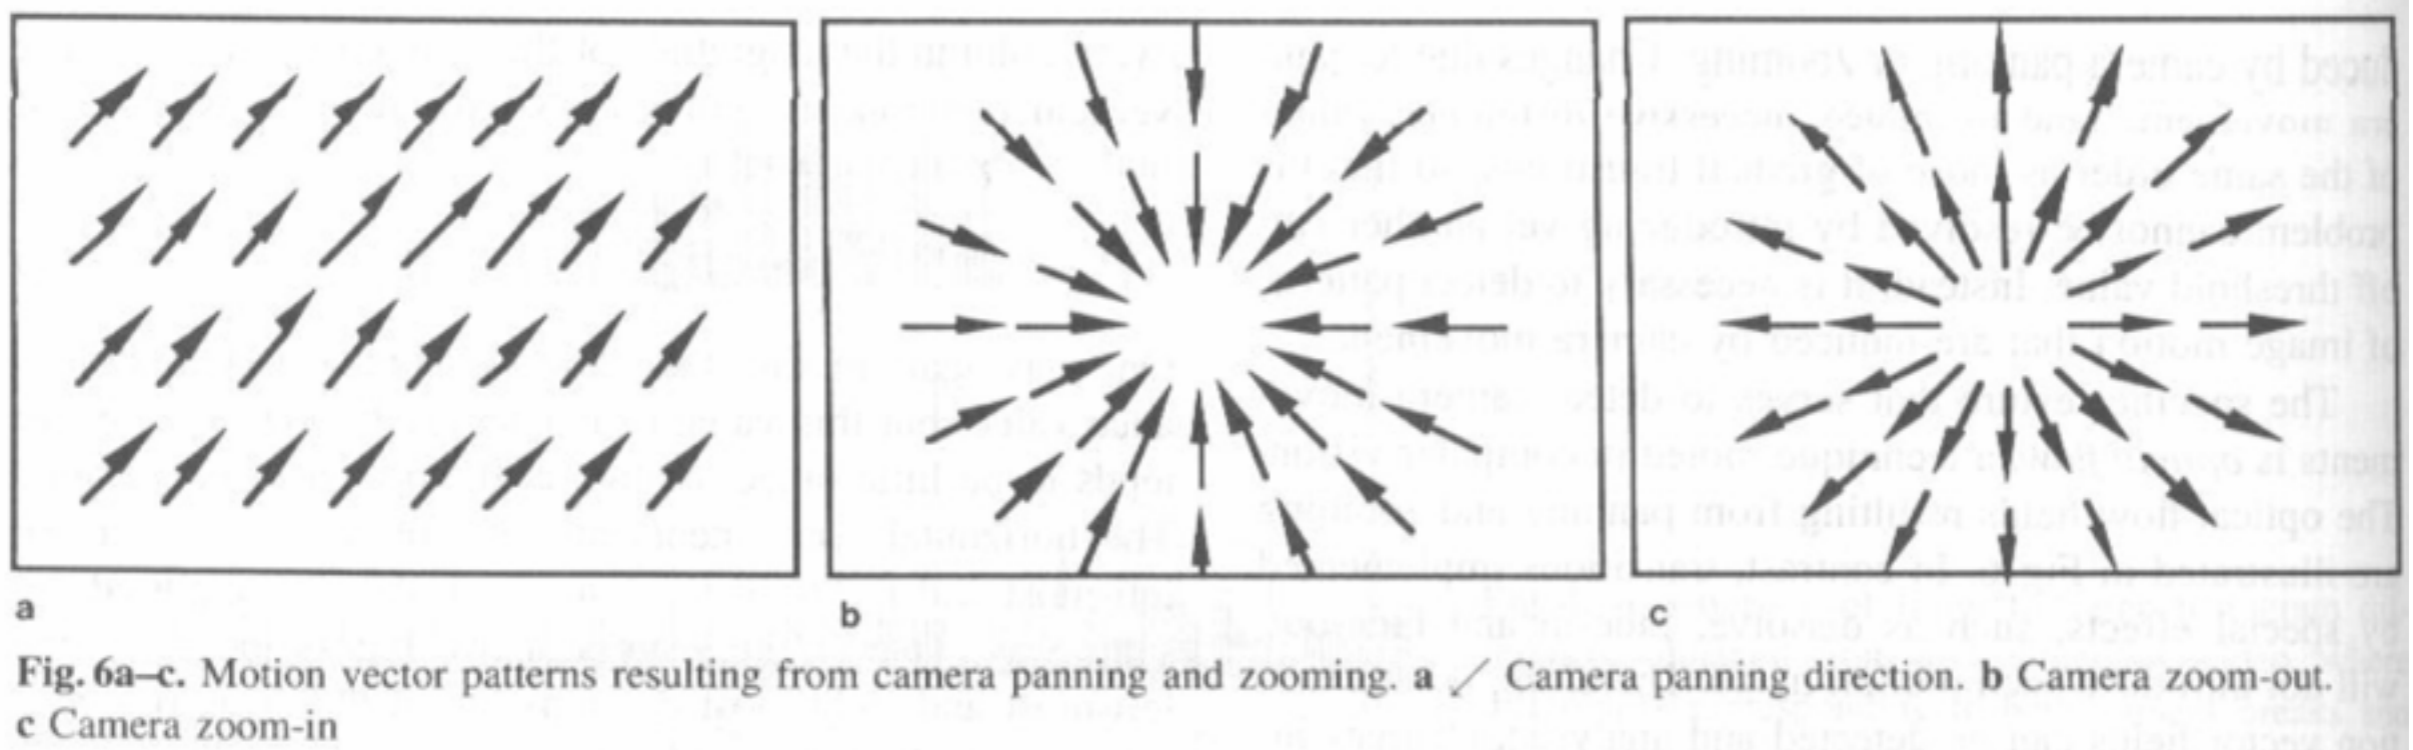

Distinguish camera movement

- **Panning**


- Distribution of motion vectors has a single modal value (θ_m) that corresponds to the panning direction.

$$\sum_k^N |\theta_k - \theta_m| \leq \Theta_p$$

- **Zooming**

- The vertical components of top and bottom motion vectors have different signs.
- Similarly for horizontal components of left and right motion vectors.


Yet Another Video Segmentation

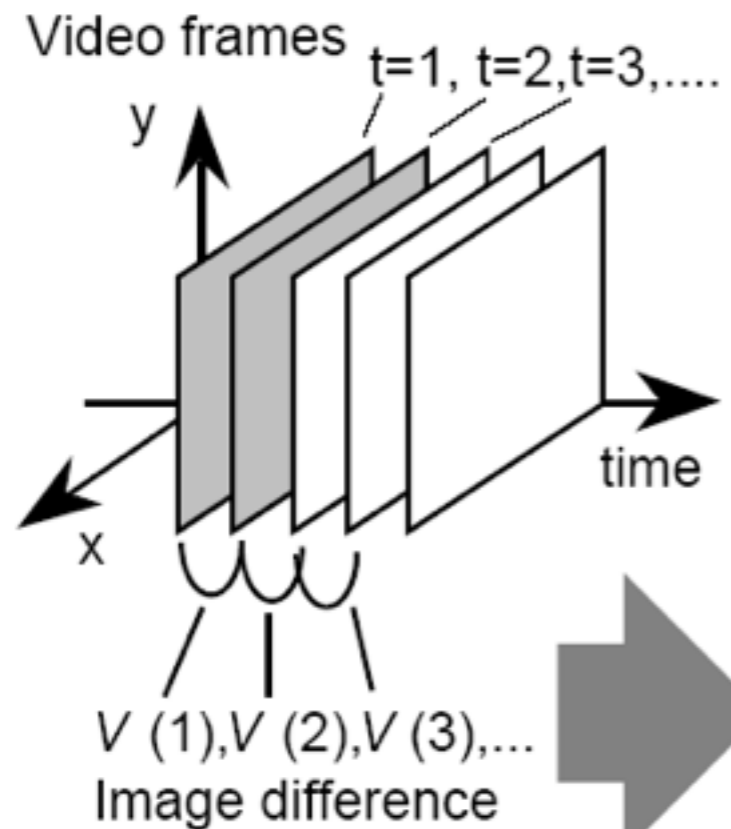

V = image difference




$F(V(1)), F(V(2)), F(V(3)), \dots$

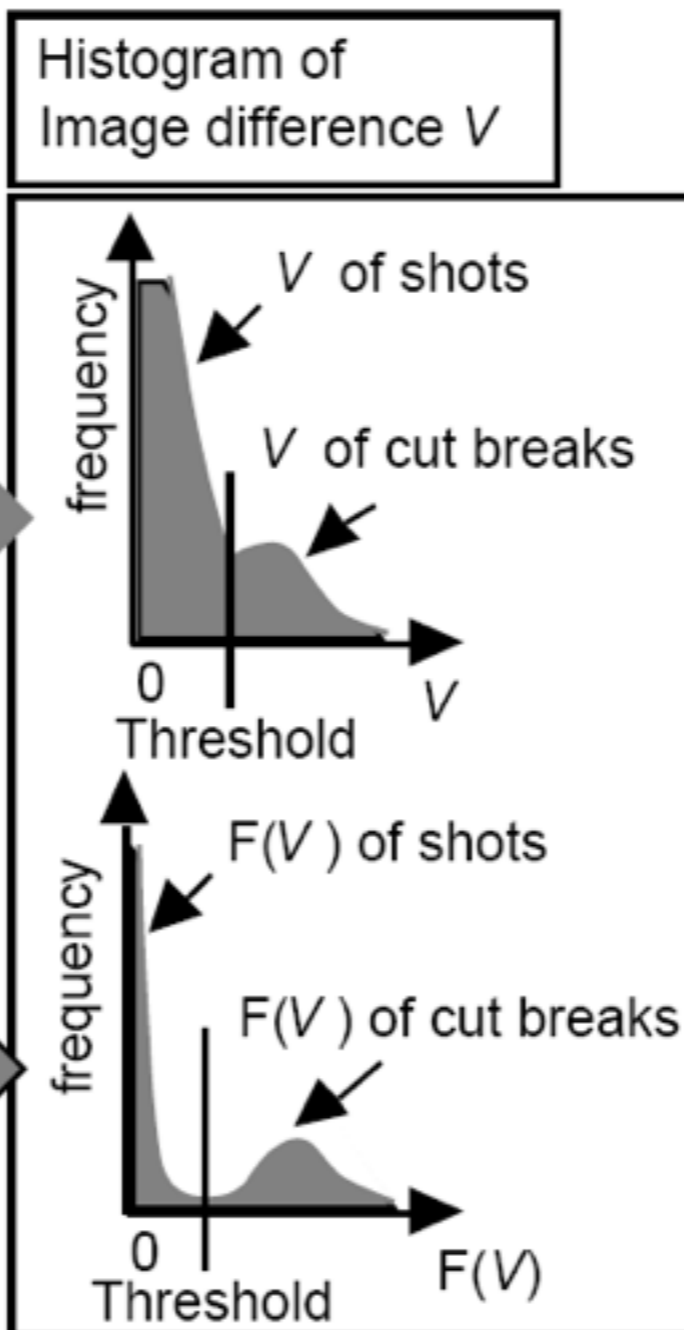

Video Segmentation: Solution

- 92-98% success rate over 4.5 hours of video (news, movies, documentaries)
- 90% success when 1/3 of all cuts were via special affects

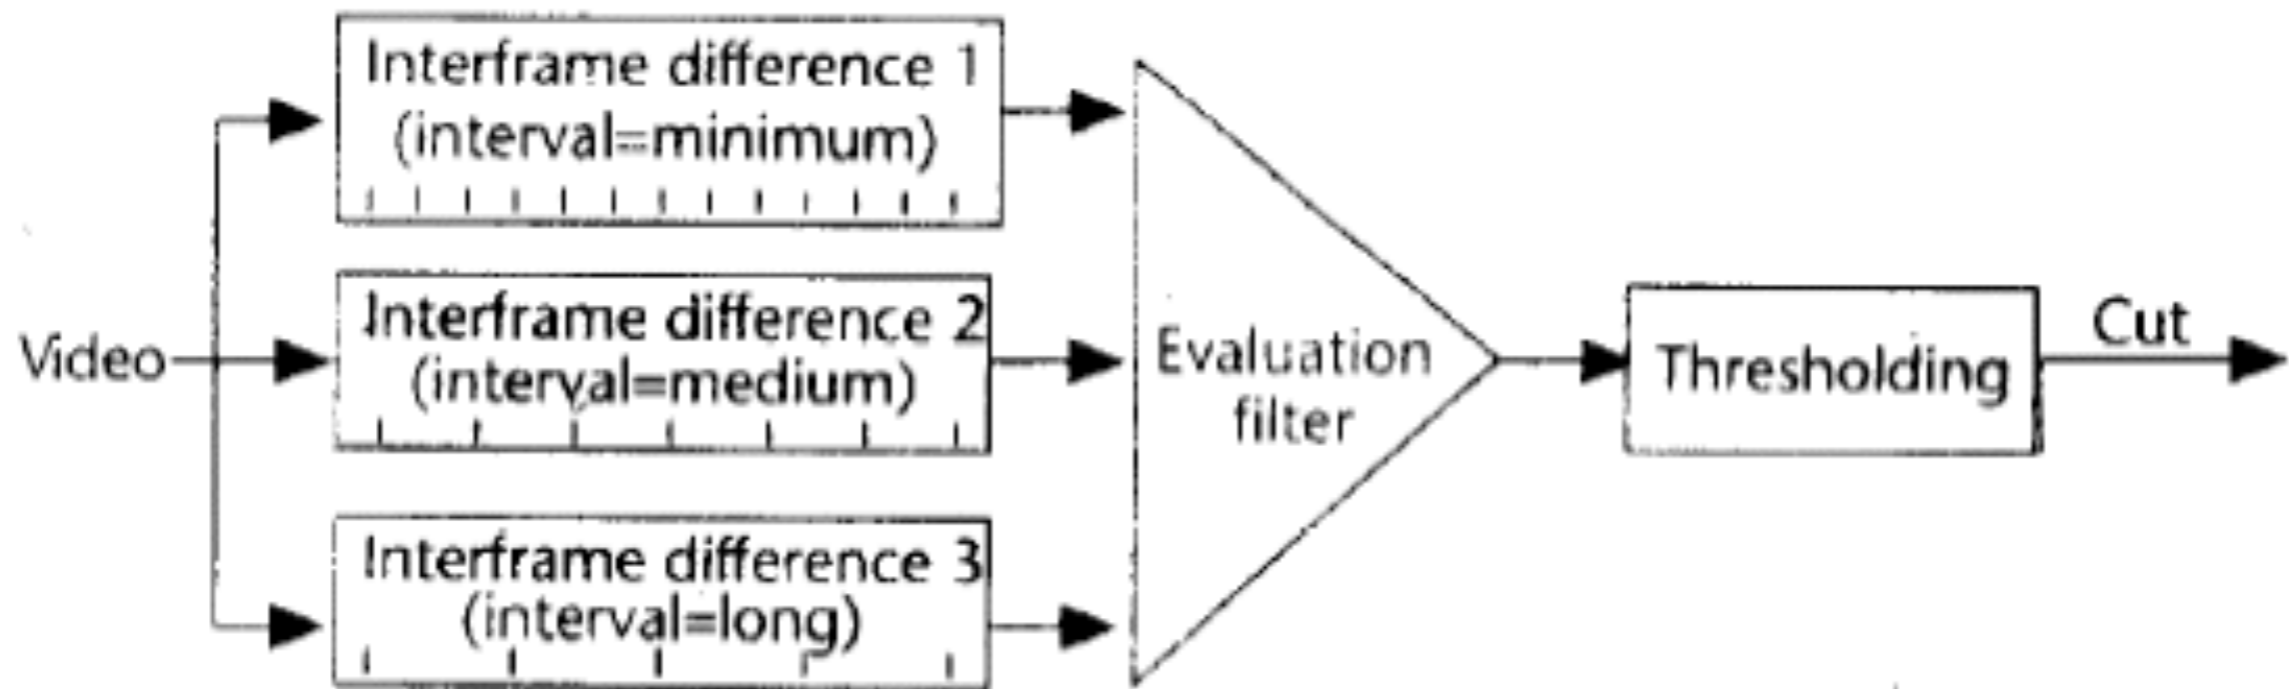


Shot Analysis


- Shot is simply sequence of frames capturing a scene's spatial and temporal context.
- Extract this information:
 - Camera work yields spatial situation
 - Color info yields object information

Camera Work Information Extraction

- Camera movement causes global change in objects.
- Resulting point traces = motion vectors
- Motion vectors yield camera work parameters
- Computationally complex, not robust

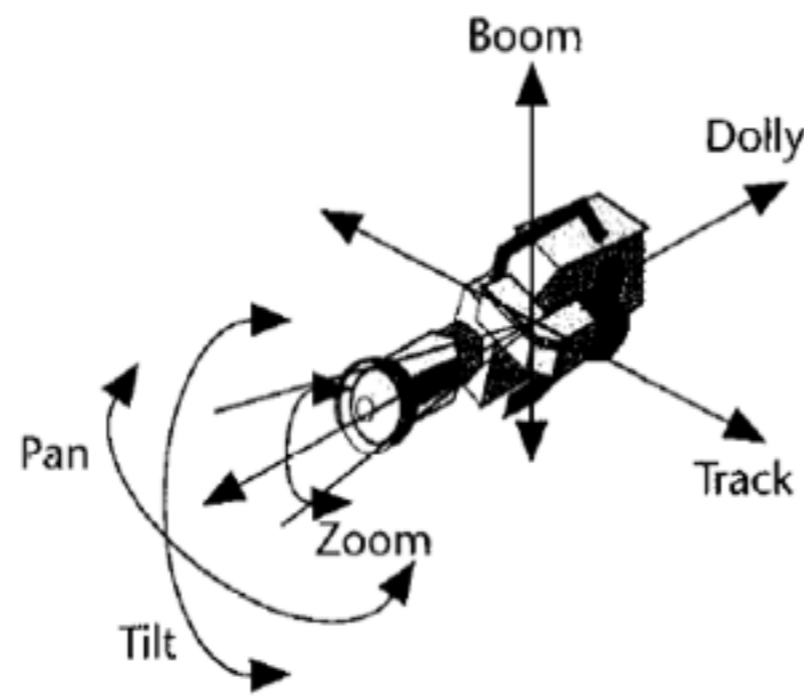



Camera Work Information Extraction

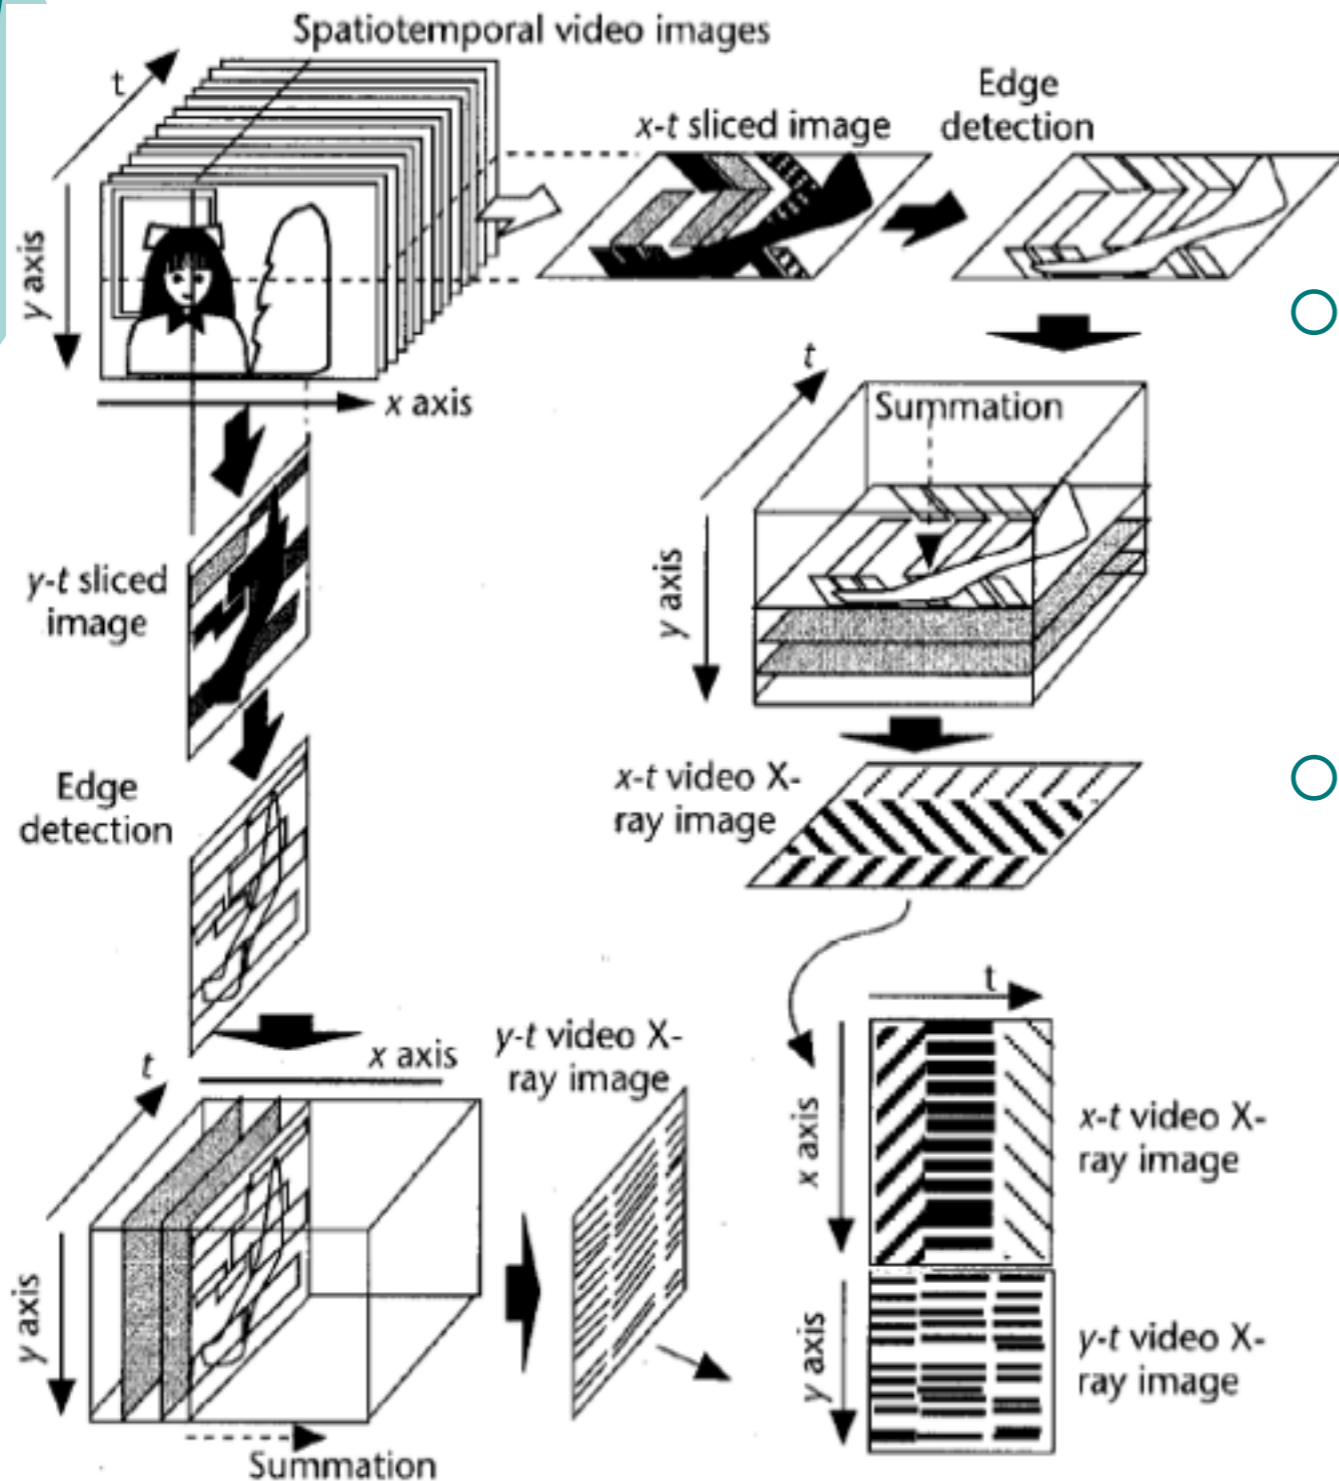

- Proposal based on video x-ray imaging.
- Easy calculations, robust

Camera Work Information Extraction

- Parallel to time = fixed camera
- Slant = camera pan
- Degree of slant = speed of pan
- Line spread = zoom
- No information present for track and dolly

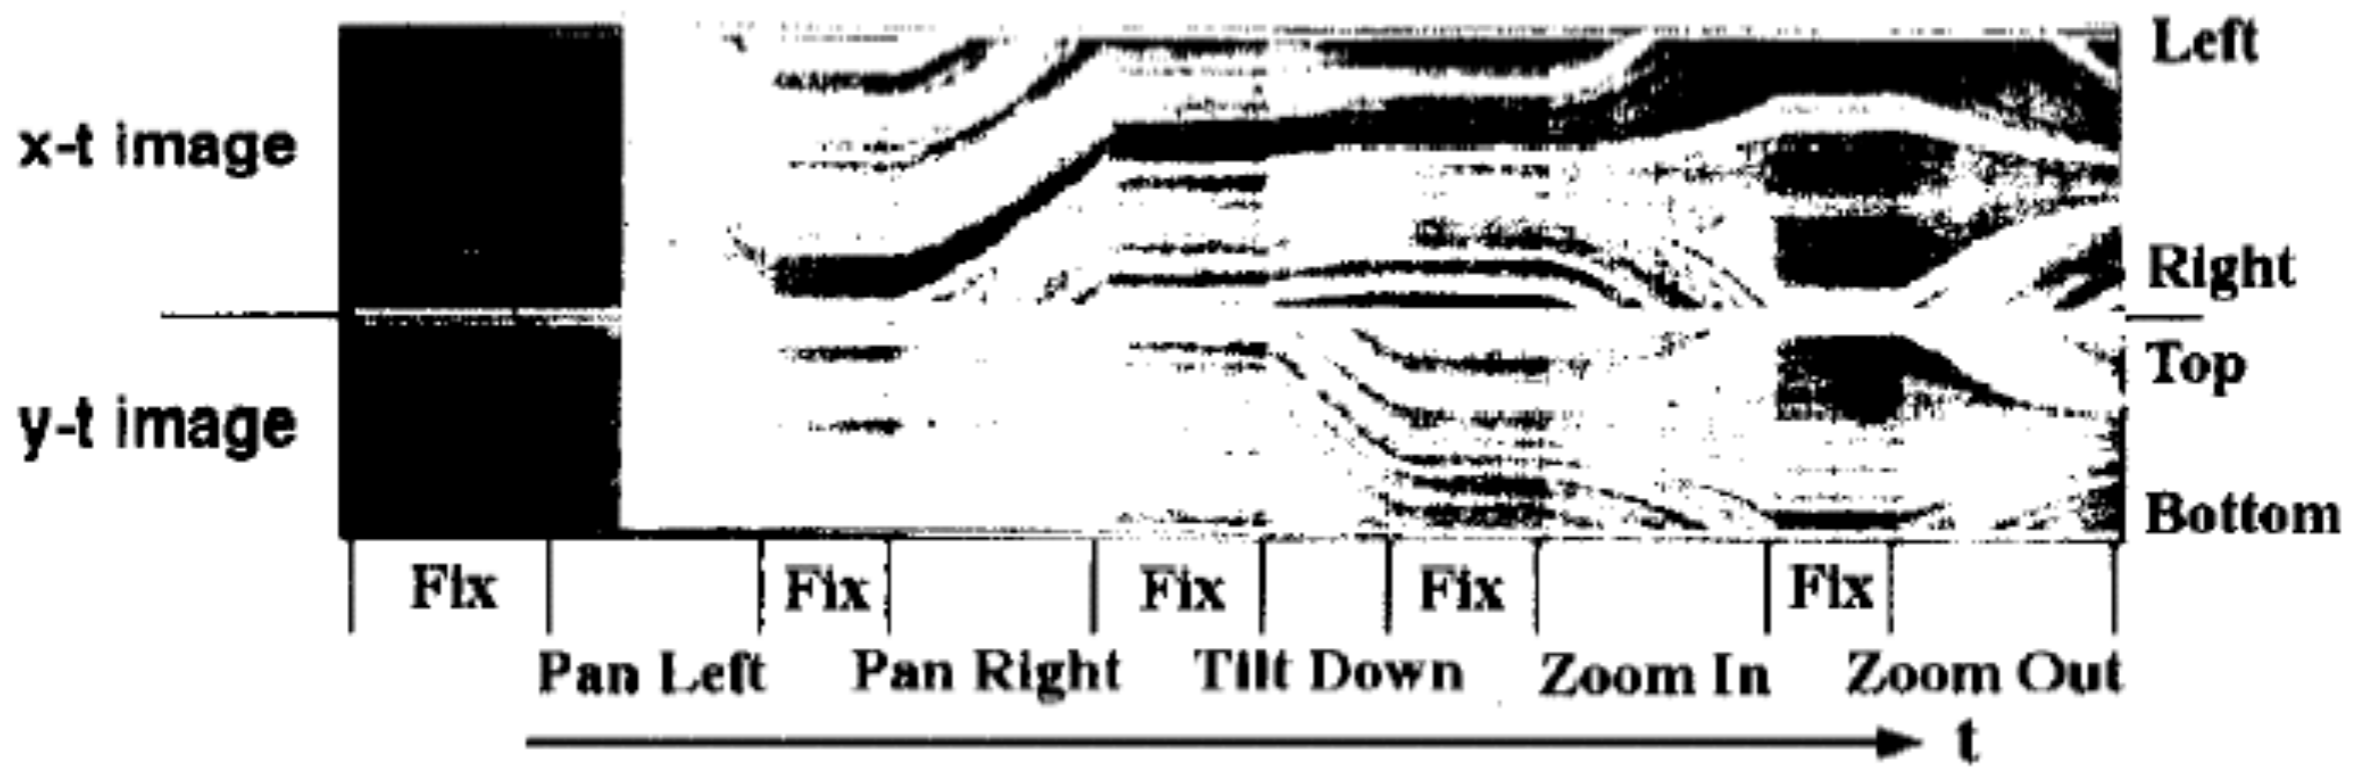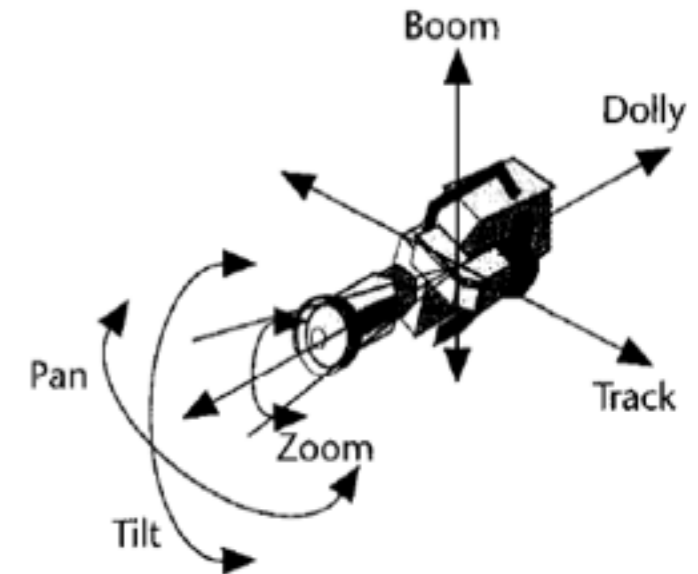




New Video Interfaces


- VideoScope
- VideoSpaceIcon
- ViewSpaceMonitor
- PaperVideo

PaperVideo

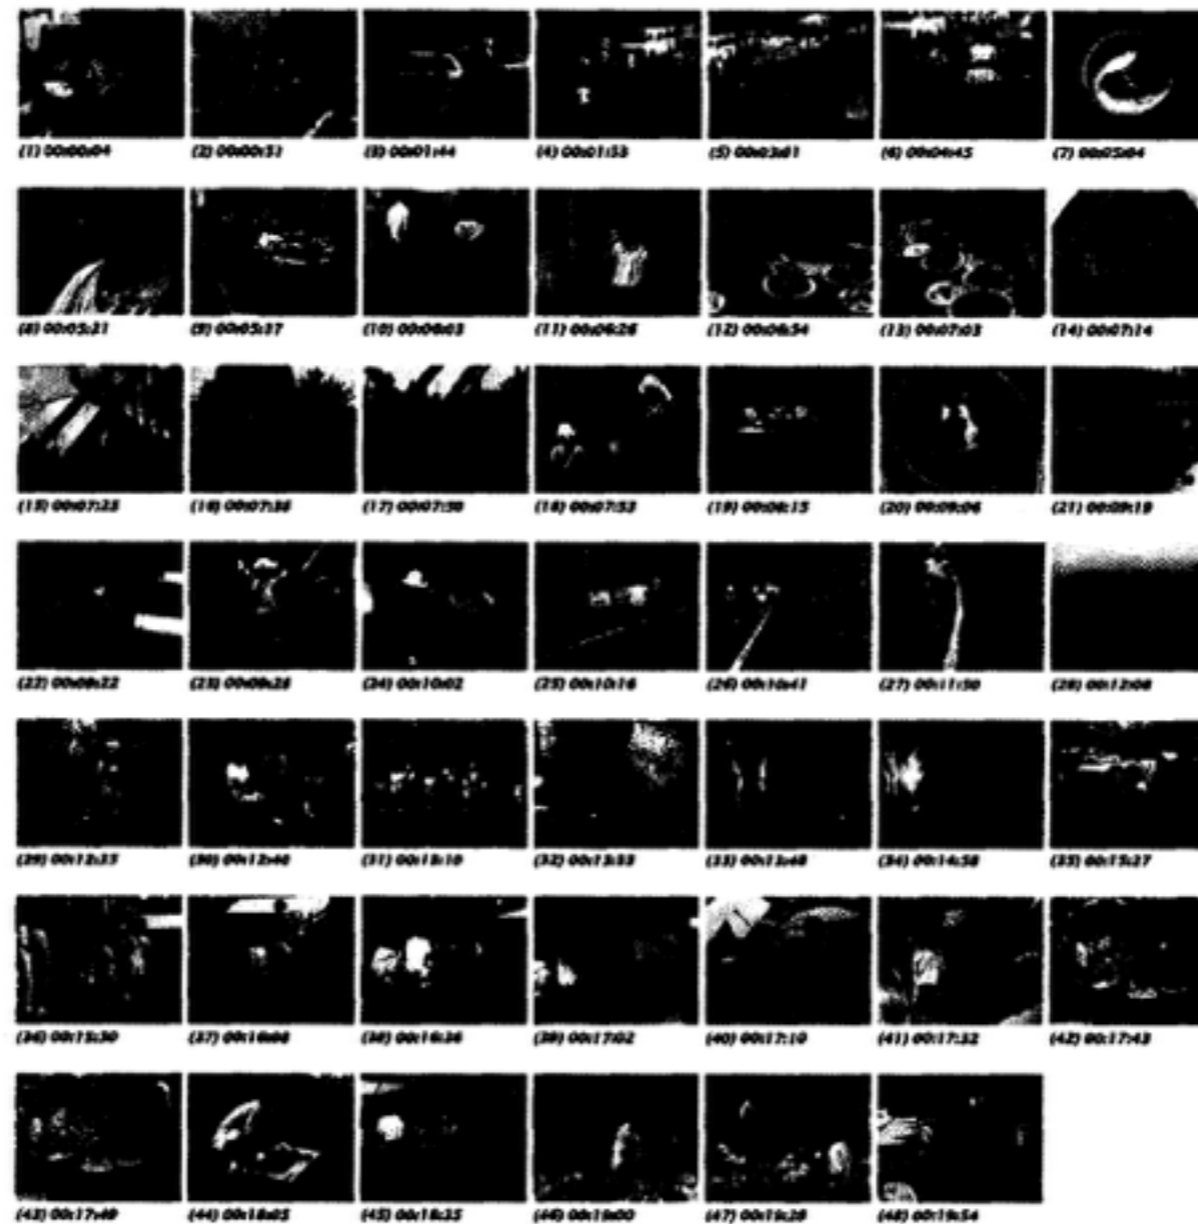


- Photo albums and video indexing.
- Shows potential simplicity of structured video apps.

VideoScope

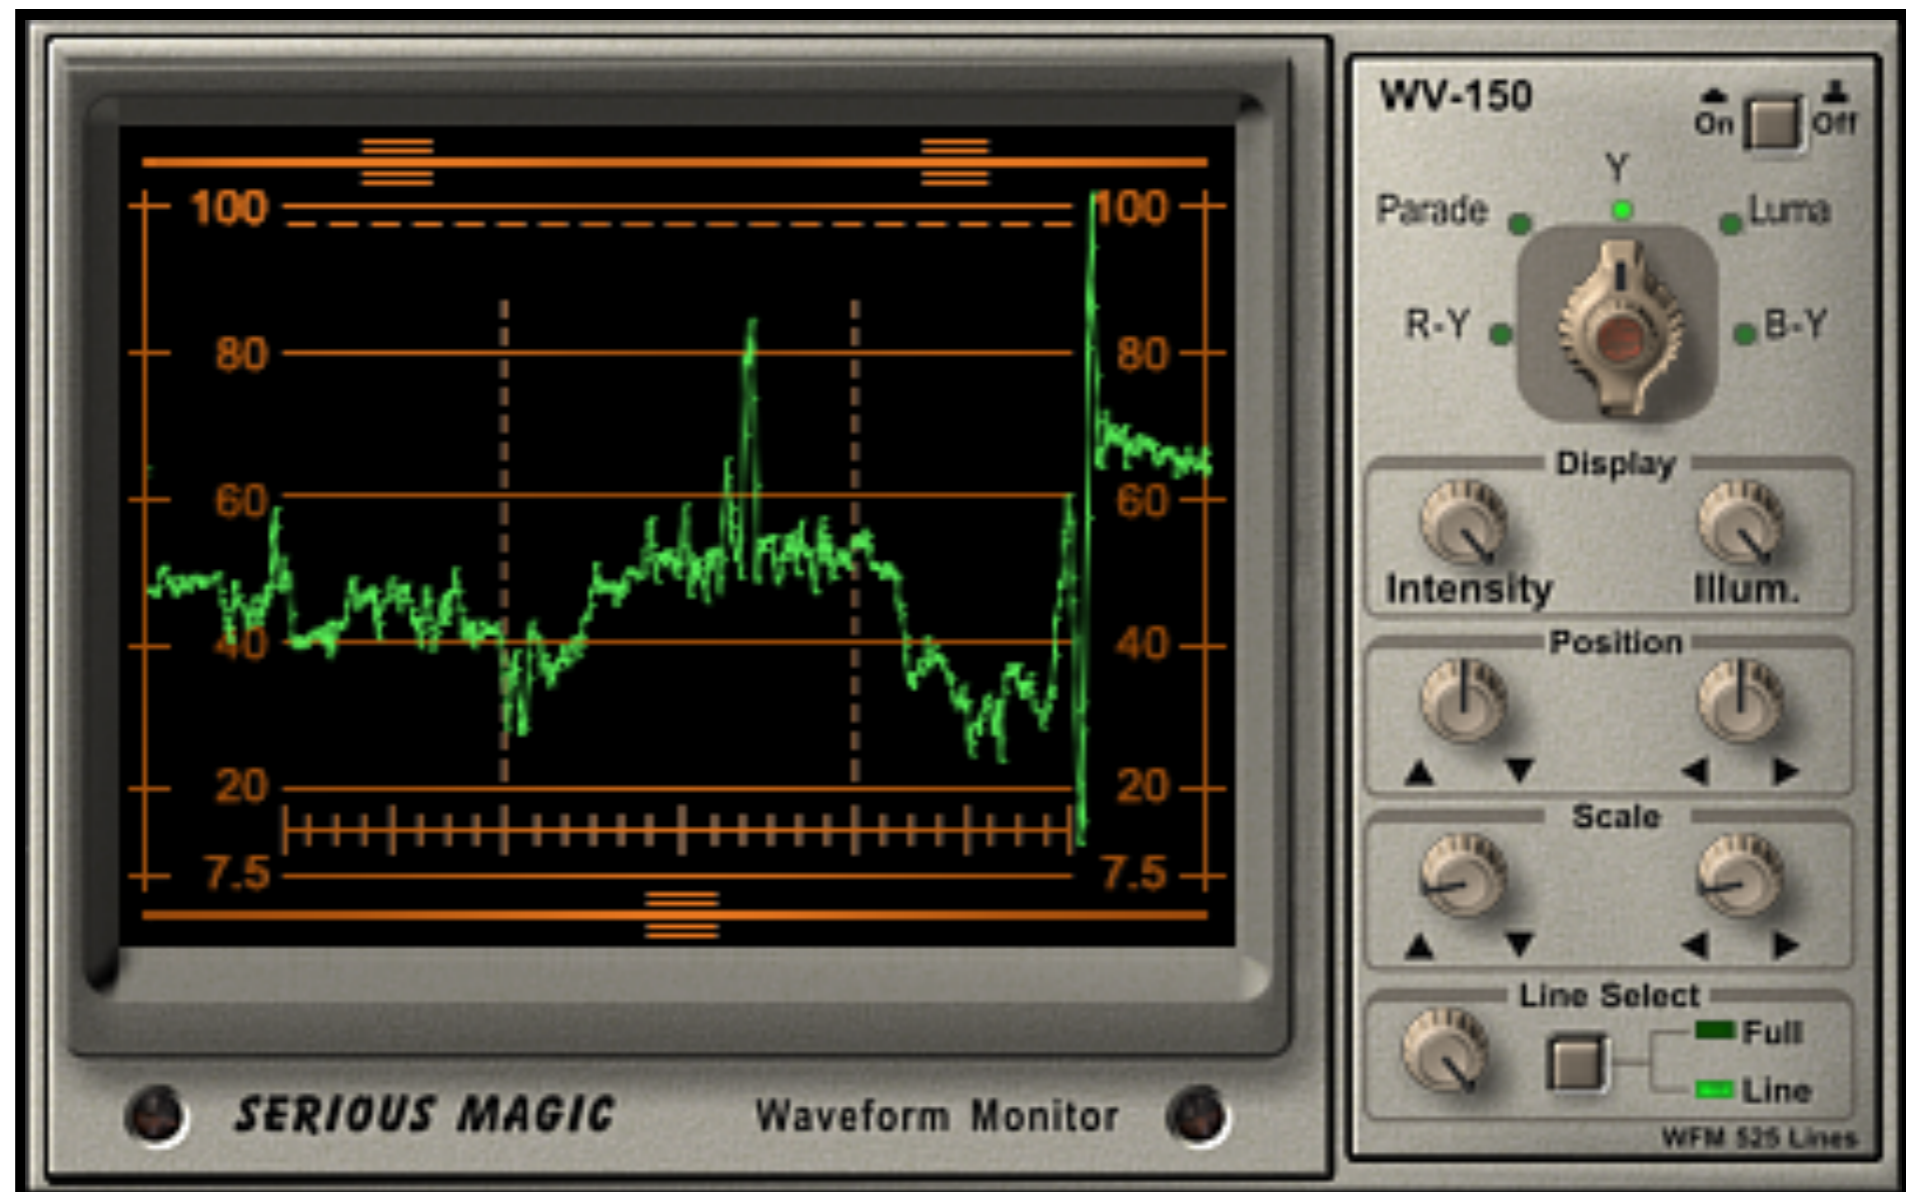

VideoScope

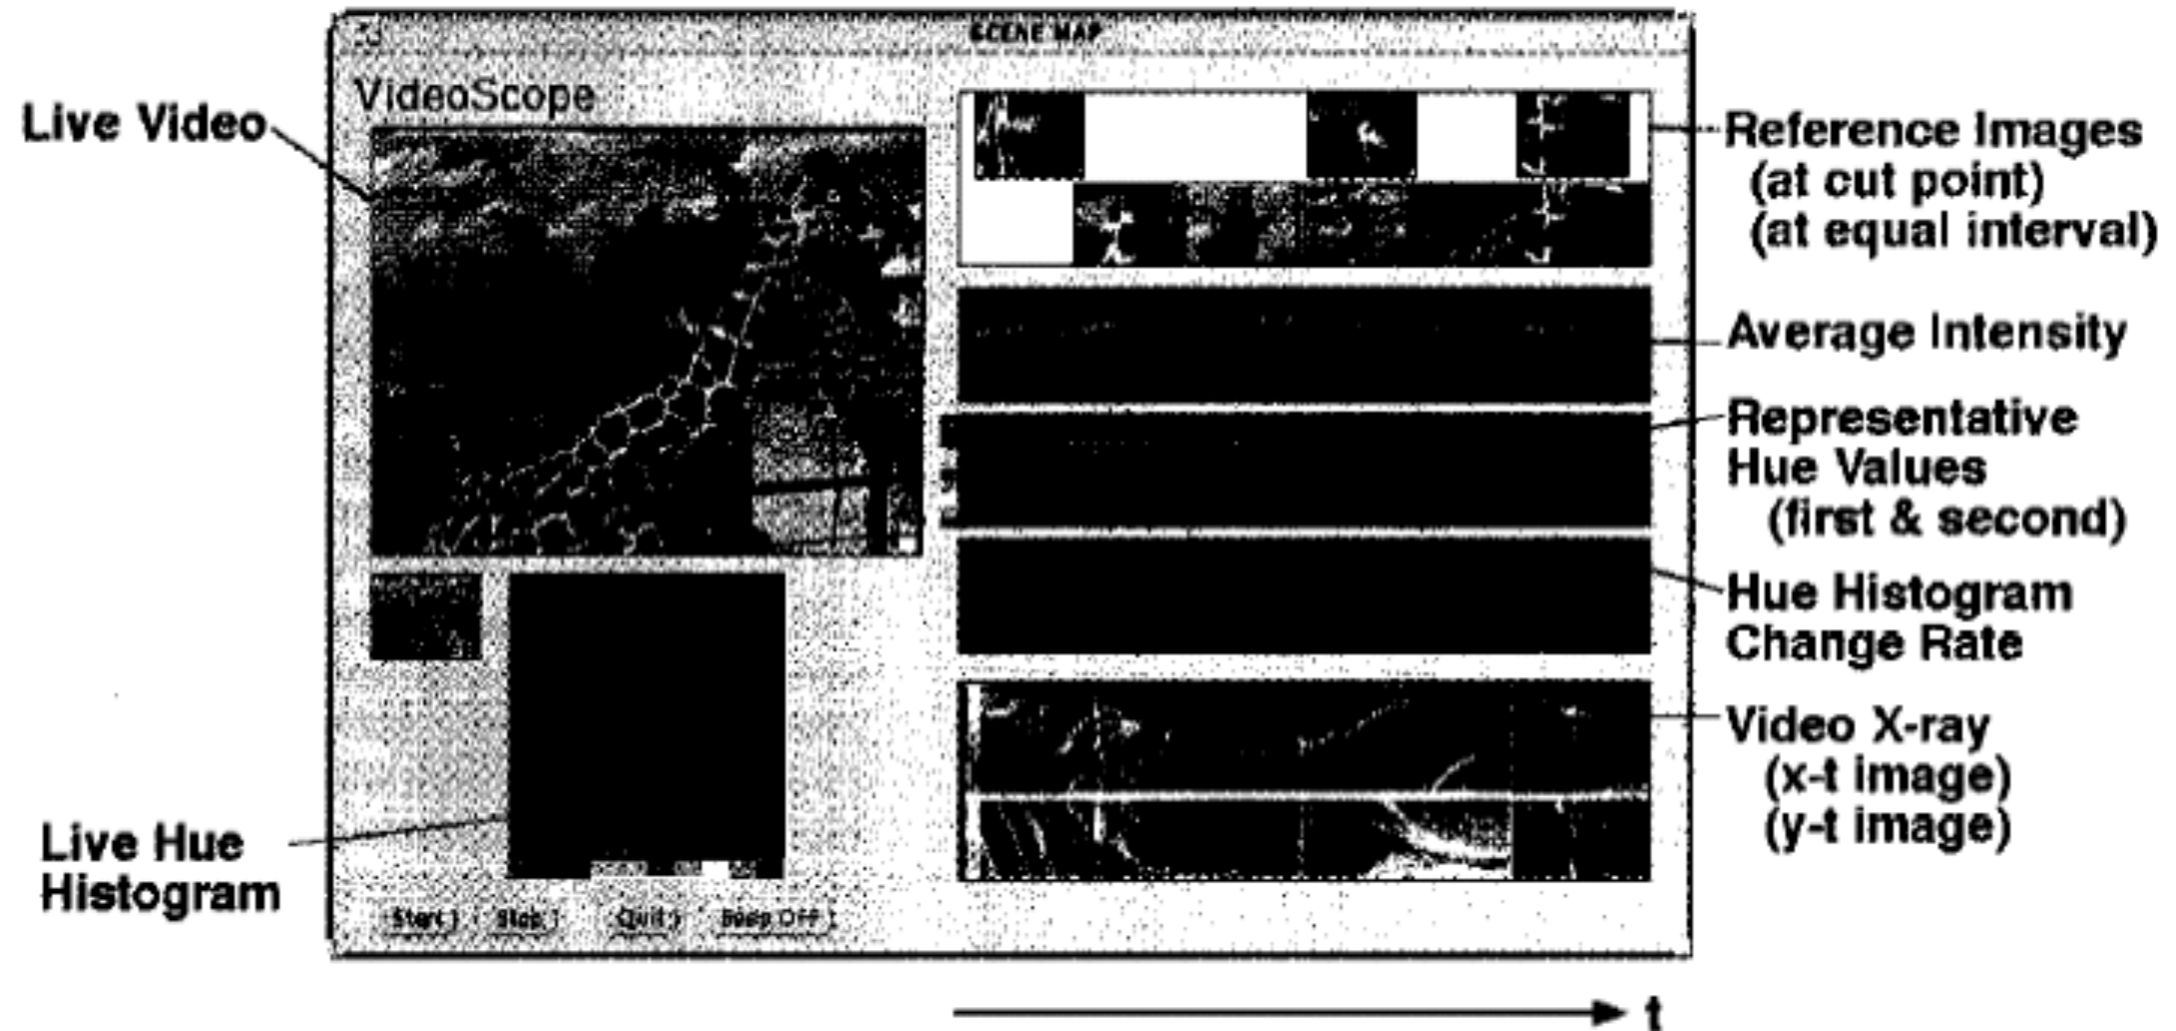

- Possible use as video engineering tool.
- Shows potential complexity of structured video apps.

Related Work

- Importance of visual interface
 - Must activate user's visual sense
 - Must stimulate user's ability to manipulate video




- What can be done in video production stage?

Notable Reference

Cut Detection



K. Otsuji, Y. Tonomura, "Projection Detecting Filter for Video Cut Detection," *Proc. ACM Multimedia 93*, ACM Press, New York, 1993.

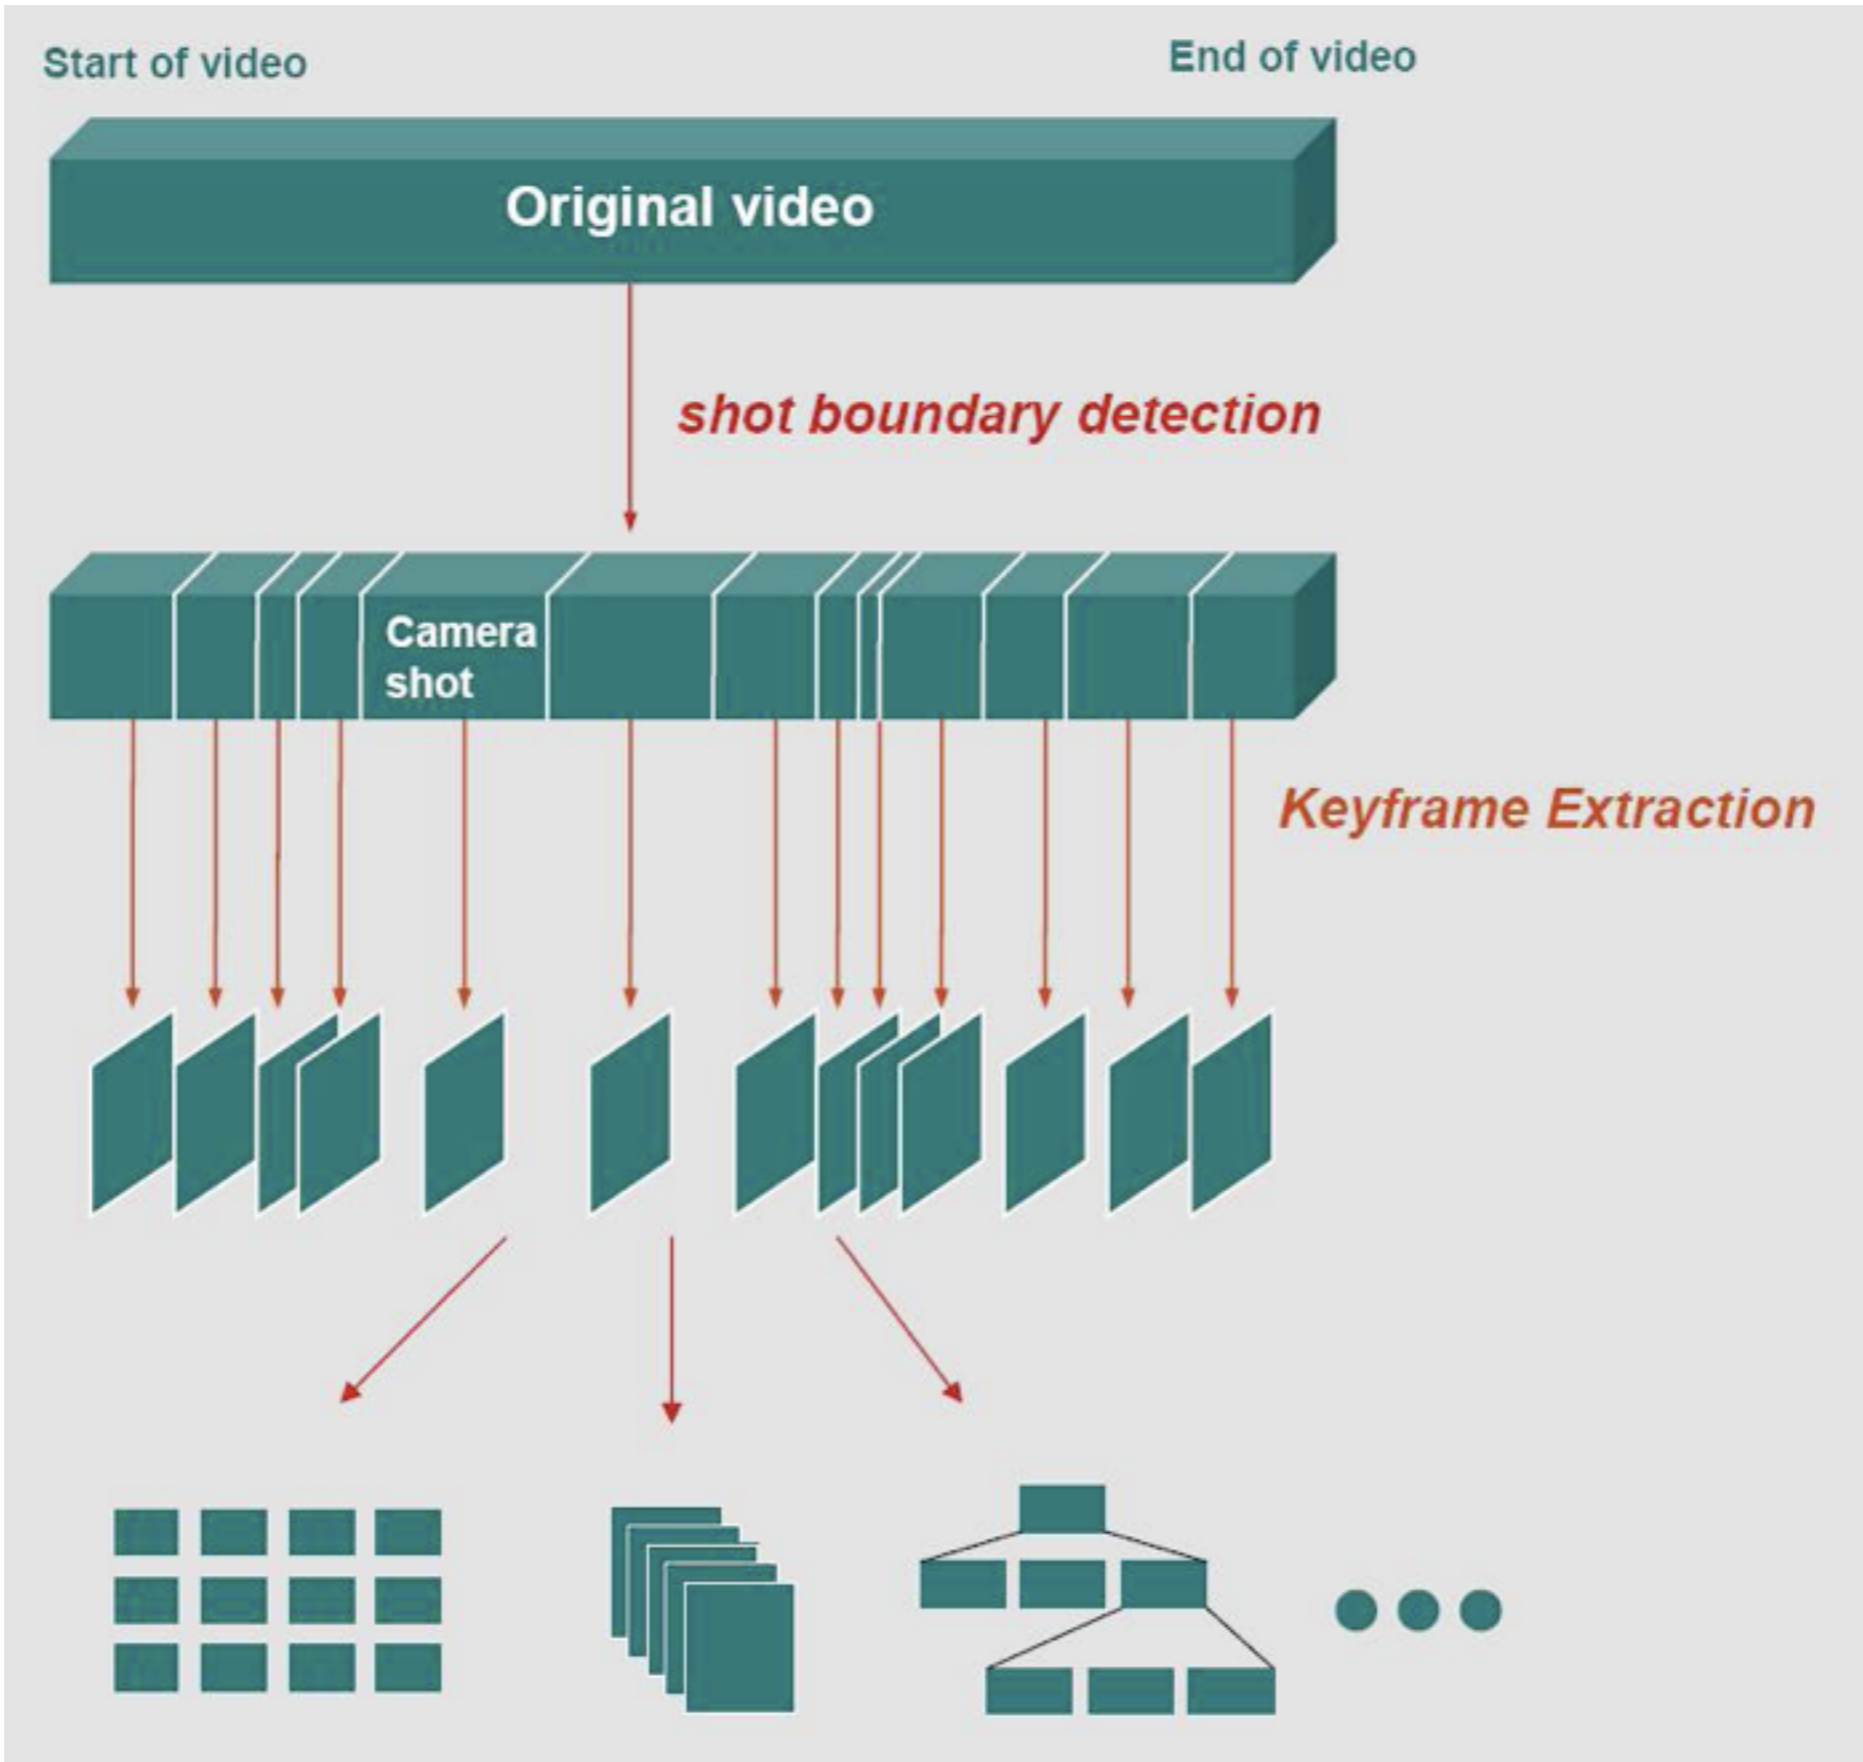

Reference

- Key Frame Extraction

http://www.cs.ust.hk/~rossiter/mm_projects/video_key_frame/key_frame_index.html

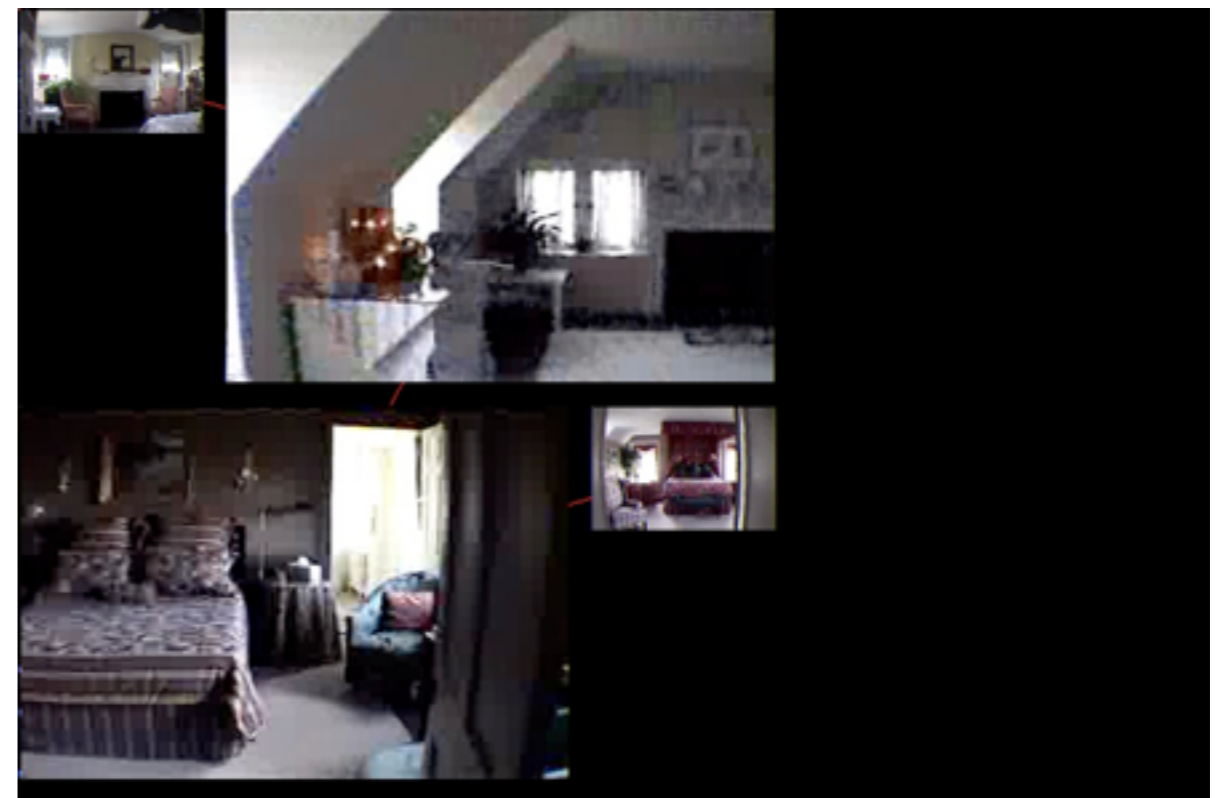

关键帧提取技术

- **镜头边界法**
 - 选取镜头中的首帧和末帧
- **颜色特征法**
 - 首帧为关键帧，其后比较与前面关键帧的颜色差异
- **运动分析法**
 - 分析相机的运动
- **聚类分析法**

聚类分析法

- 设一个镜头 $S = \{f_1, f_2, \dots, f_m\}$
 - 找关键帧 $[F_1, F_2, \dots, F_n]$
 - 定义帧间距离 $d(f_i, f_j)$

Step 0. 设定阈值，选定初始n个关键帧位置

Step 1. 按照到关键帧的最小距离重新划分

Step 2. 指定每一聚类的**中心帧**为新的关键帧。

如果与上次划分区别不大则停止，否则重复
Step 1和Step 2.

Brain storm



[更多相关专辑>>](#)

专辑:[强殖装甲](#)

视频:26 时长:10:10:51 播放:42,021

专辑:[强殖装甲](#)

视频:26 时长:10:00:23 播放:2,400

专辑:[强殖装甲](#)

视频:27 时长:10:11:26 播放:1,982



[强殖装甲](#) 1:31:28



[强殖装甲](#)[强殖装甲](#)[强殖装甲](#)

[强殖装甲](#)

[malinkof](#) 3个月前

播放: 17,361 | 评论: 21 | 收藏: 21

[2条相似结果](#)



BriefCam



- Making a long videoshort: Dynamic video synopsis
- <http://www.vision.huji.ac.il/video-synopsis/>

9 hours of footage before Video Synopsis




Synopsized video - 9 hours in 20 seconds





4. Graphics retrieval techniques

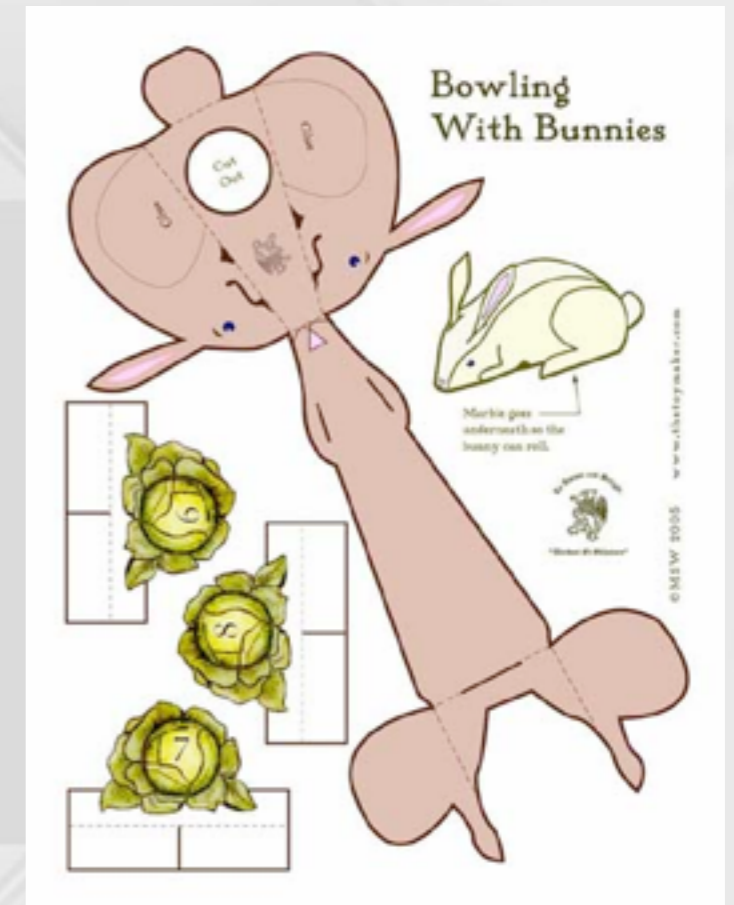

3D Model Similarity Search

Content-based Classification of 3D models
by Capturing spatial Characteristics
Dean F. Franke and Dierker Sauer © 2002

Select database











NEW CLASSIFICATION DETECTED!

Retrieval results

Feature vector: Ray-Gray with SH rep., dimension: 169, used distance: l_1

Perform geometrical test for tree-17

Indexing time: 0.060 seconds

query model	match no. 1	match no. 2	match no. 3	match no. 4
 tree-17 wrl 800	 tree-17 wrl 800	 tree-1 wrl 139	 tree-2 wrl 139	 tree-8 wrl 139
 tree-18 wrl 390	 tree-10 wrl 412	 tree-9 wrl 413	 aero-dynamic-6 wrl 414	 tree-5 wrl 414

View 11 matches Worst matches


View query

© 2002 by Dean F. Franke and Dierker Sauer


<http://infovis.uni-konstanz.de/research/projects/SimSearch3D/>




Elements of polygonal mesh modeling

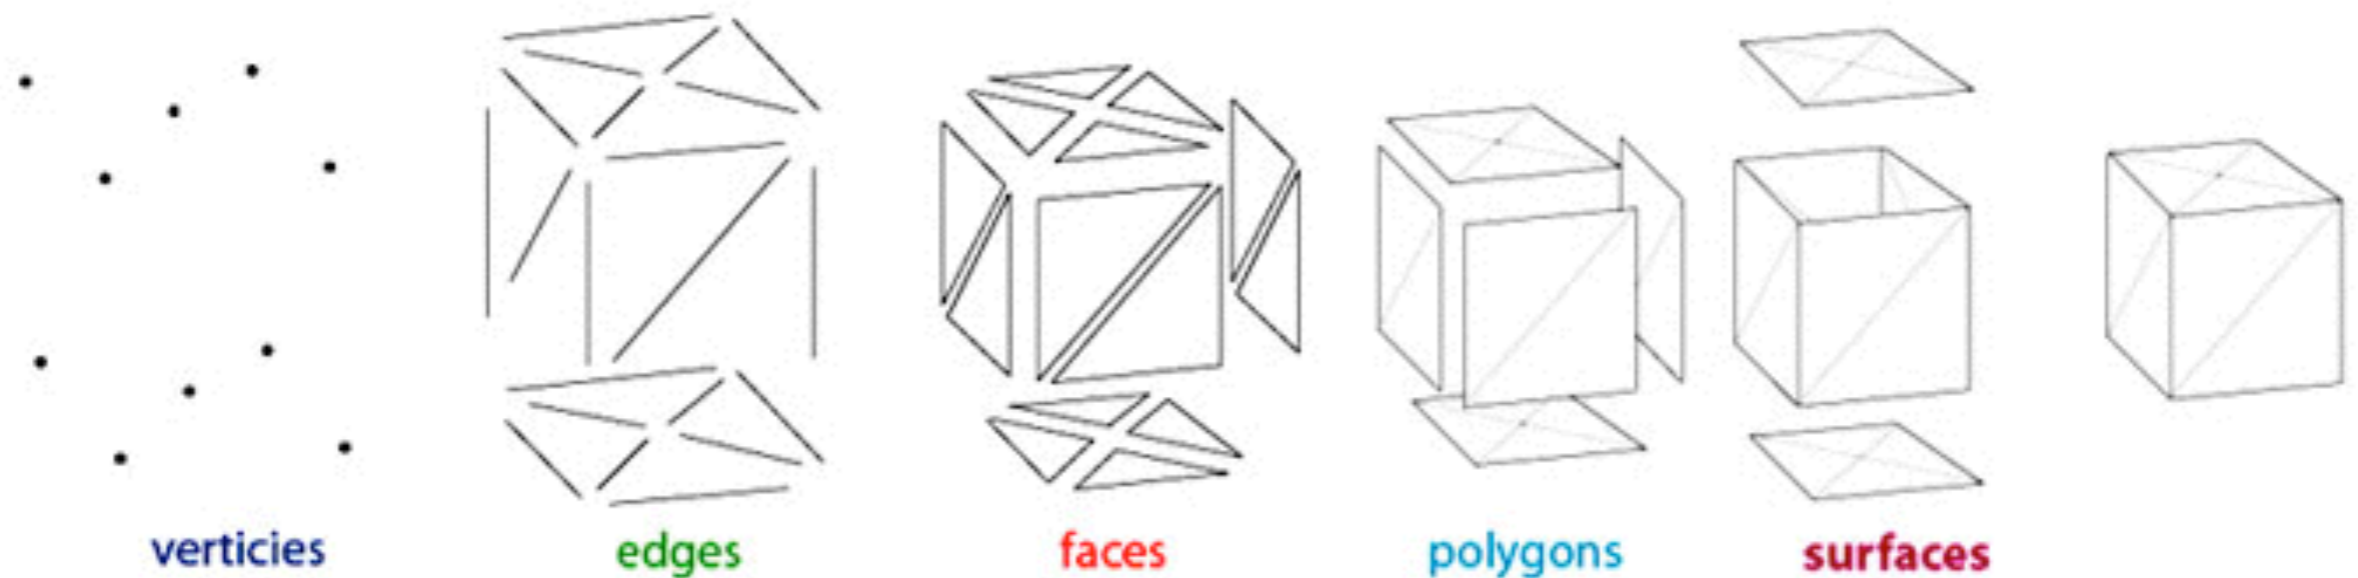

Triangle mesh

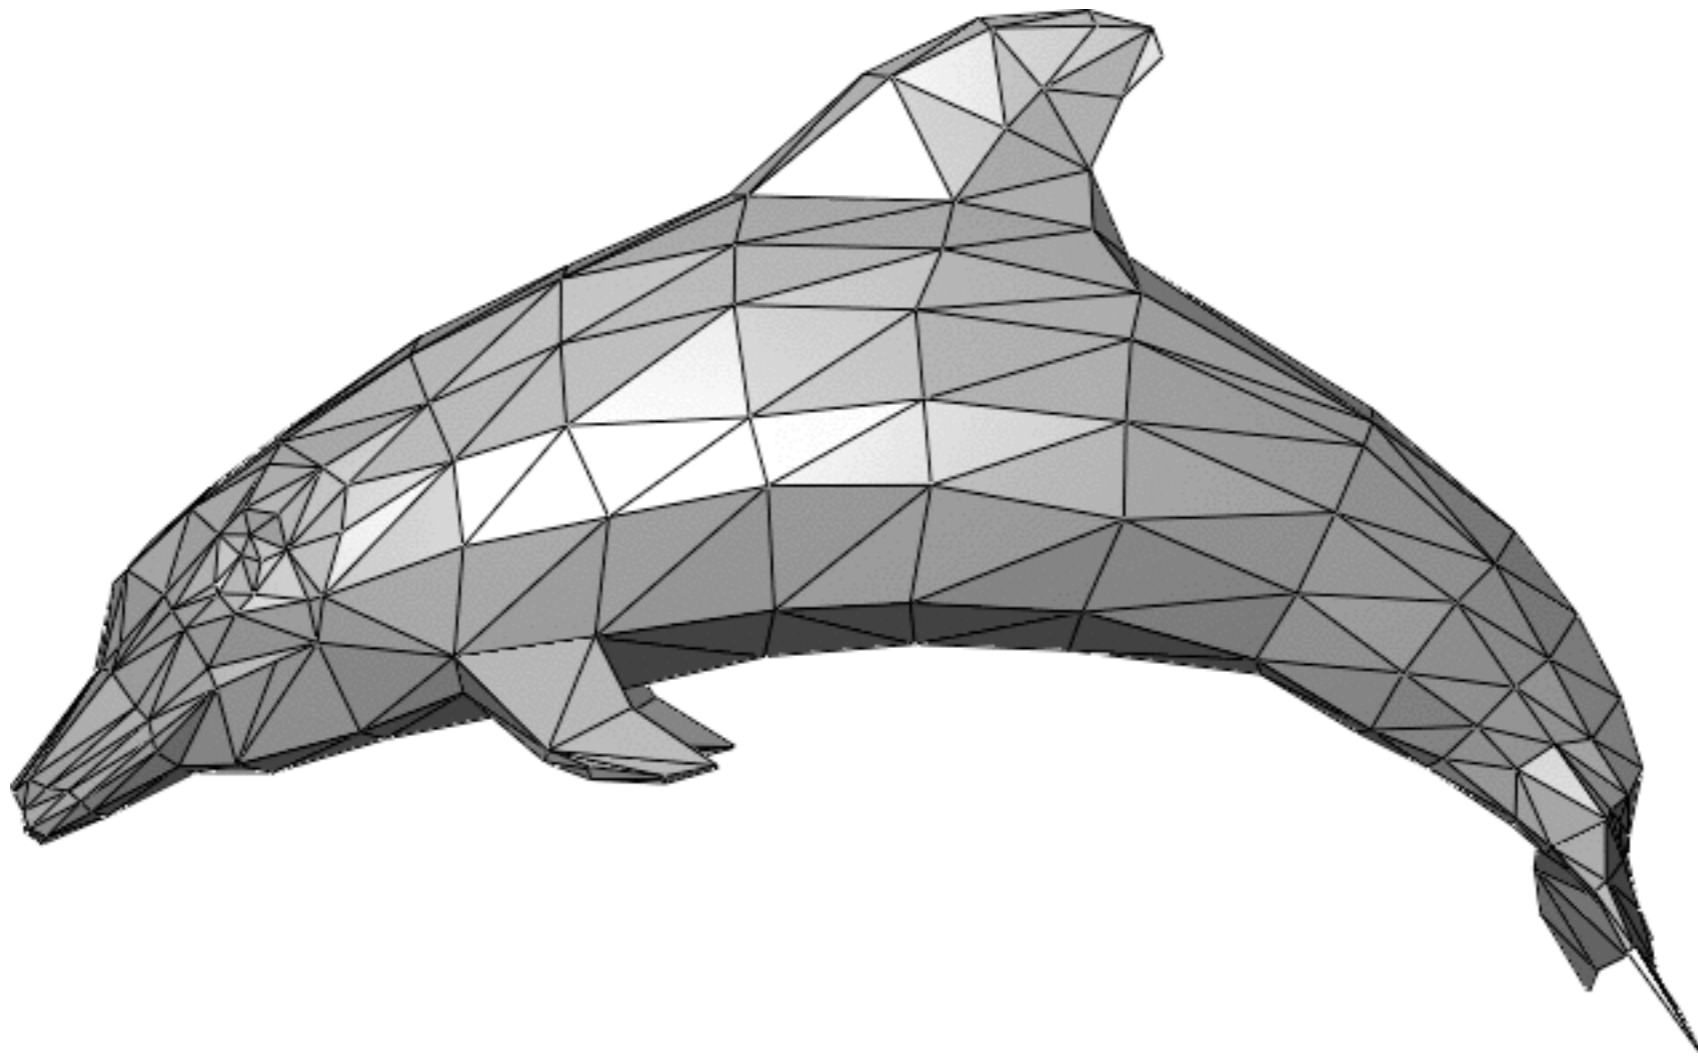

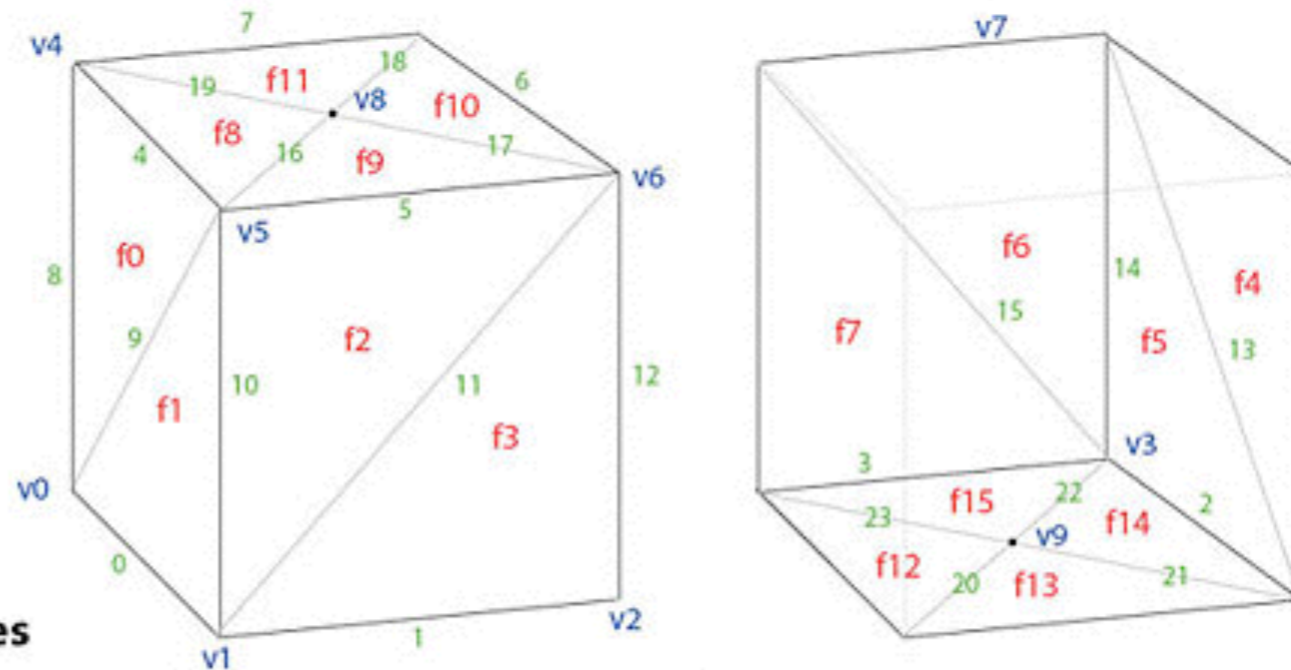

Winged-Edge Meshes

Face List


f0	4 8 9
f1	0 10 9
f2	5 10 11
f3	1 12 11
f4	6 12 13
f5	2 14 13
f6	7 14 15
f7	3 8 15
f8	4 16 19
f9	5 17 16
f10	6 18 17
f11	7 19 18
f12	0 23 20
f13	1 20 21
f14	2 21 22
f15	3 22 23

Edge List

e0	v0 v1	f1 f12	9 23 10 20
e1	v1 v2	f3 f13	11 20 12 21
e2	v2 v3	f5 f14	13 21 14 22
e3	v3 v0	f7 f15	15 22 8 23
e4	v4 v5	f0 f8	19 8 16 9
e5	v5 v6	f2 f9	16 10 17 11
e6	v6 v7	f4 f10	17 12 18 13
e7	v7 v4	f6 f11	18 14 19 15
e8	v0 v4	f7 f0	3 9 7 4
e9	v0 v5	f0 f1	8 0 4 10
e10	v1 v5	f1 f2	0 11 9 5
e11	v1 v6	f2 f3	10 1 5 12
e12	v2 v6	f3 f4	1 13 11 6
e13	v2 v7	f4 f5	12 2 6 14
e14	v3 v7	f5 f6	2 15 13 7
e15	v3 v4	f6 f7	14 3 7 15
e16	v5 v8	f8 f9	4 5 19 17
e17	v6 v8	f9 f10	5 6 16 18
e18	v7 v8	f10 f11	6 7 17 19
e19	v4 v8	f11 f8	7 4 18 16
e20	v1 v9	f12 f13	0 1 23 21
e21	v2 v9	f13 f14	1 2 20 22
e22	v3 v9	f14 f15	2 3 21 23
e23	v0 v9	f15 f12	3 0 22 20


Vertex List

v0	0,0,0	8 9 0 23 3
v1	1,0,0	10 11 1 20 0
v2	1,1,0	12 13 2 21 1
v3	0,1,0	14 15 3 22 2
v4	0,0,1	8 15 7 19 4
v5	1,0,1	10 9 4 16 5
v6	1,1,1	12 11 5 17 6
v7	0,1,1	14 13 6 18 7
v8	.5,.5,0	16 17 18 19
v9	.5,.5,1	20 21 22 23

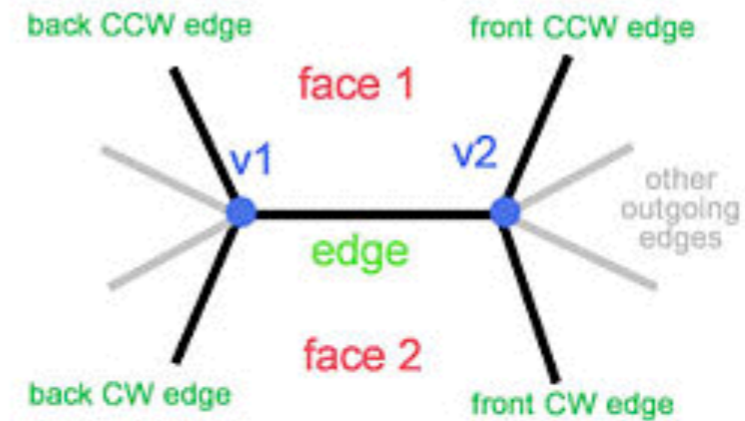

Winged Edge Structure

Main idea


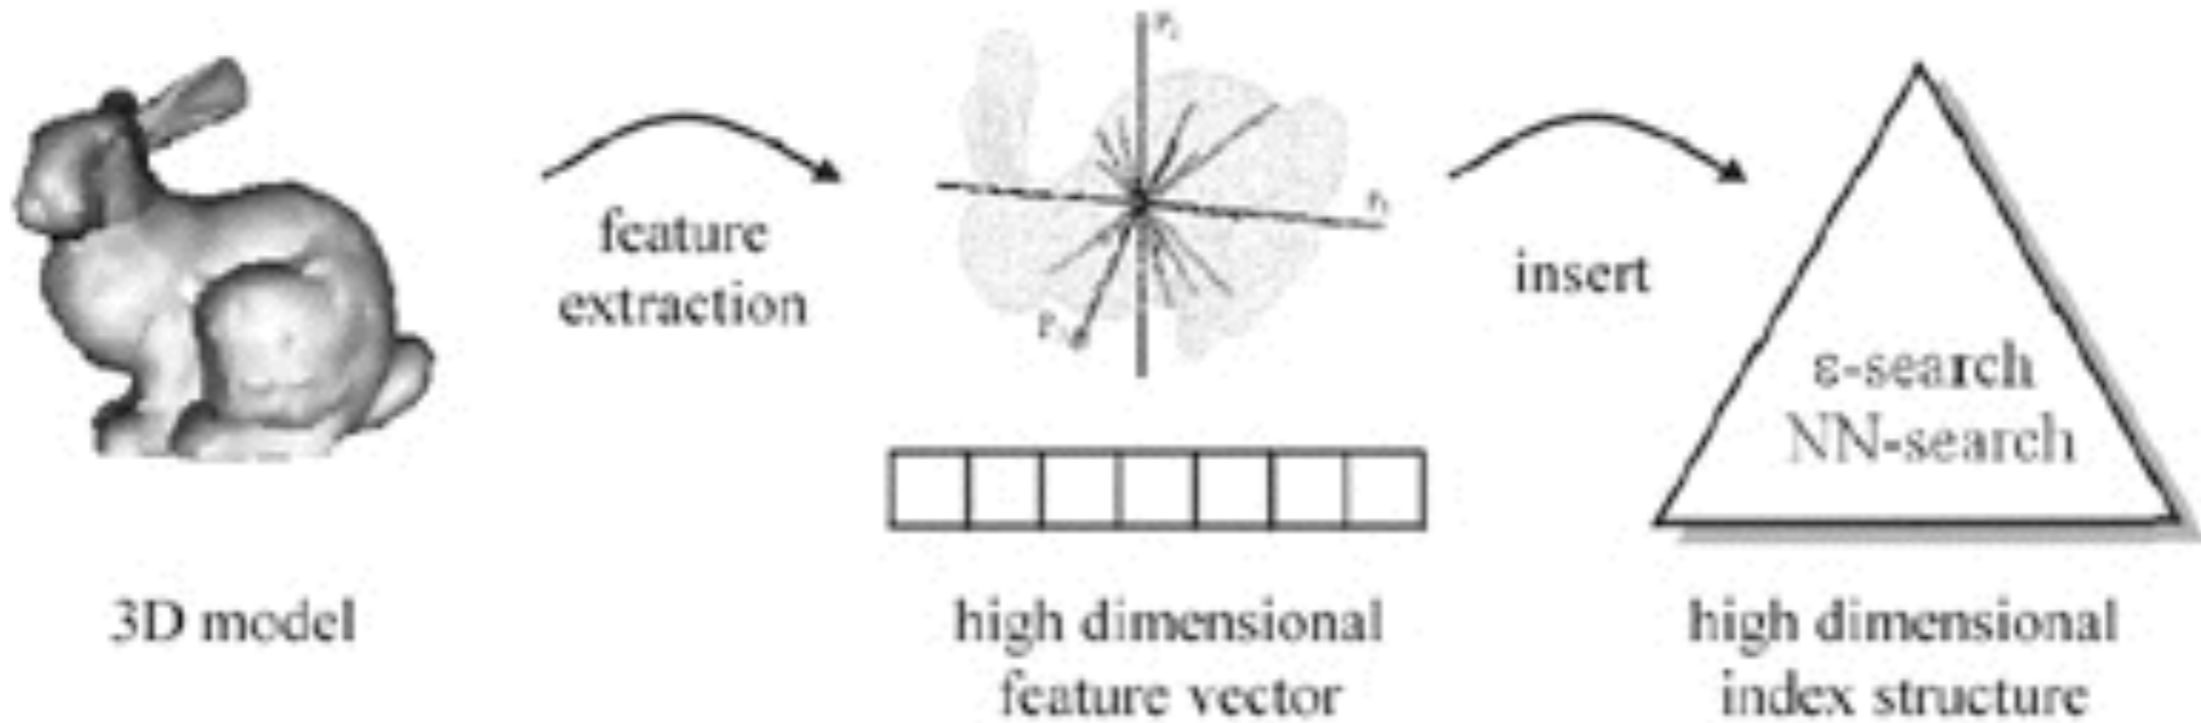


Feature vectors

- geometry based
- image based

Feature vectors

- Geometry based

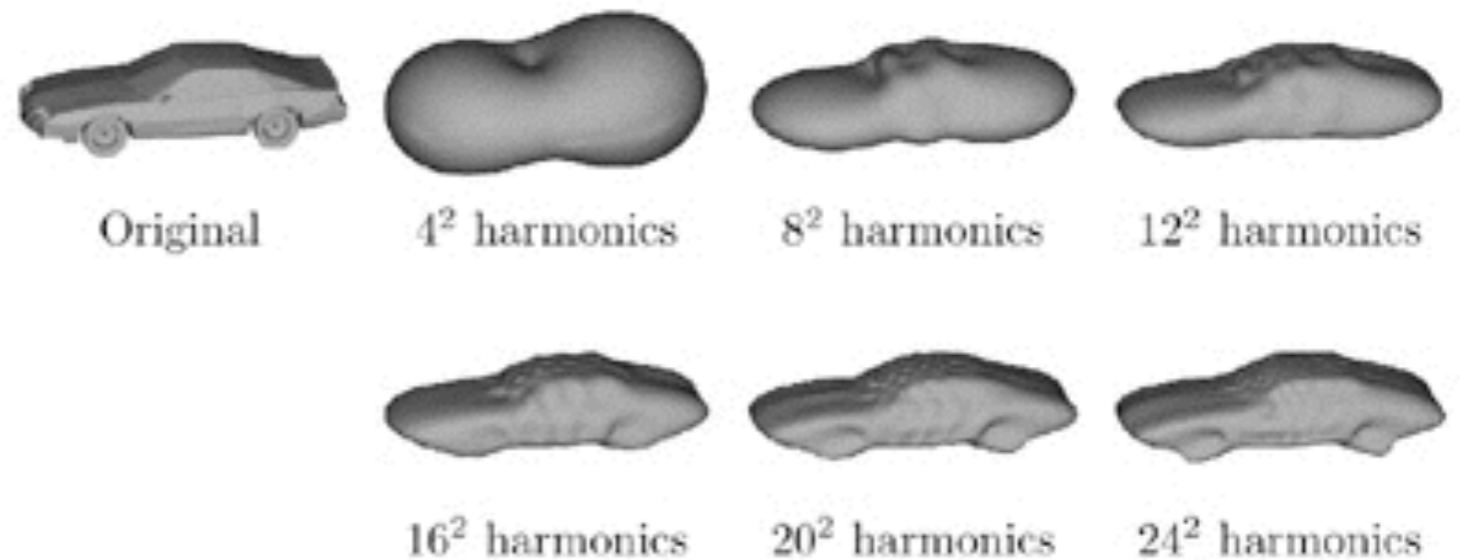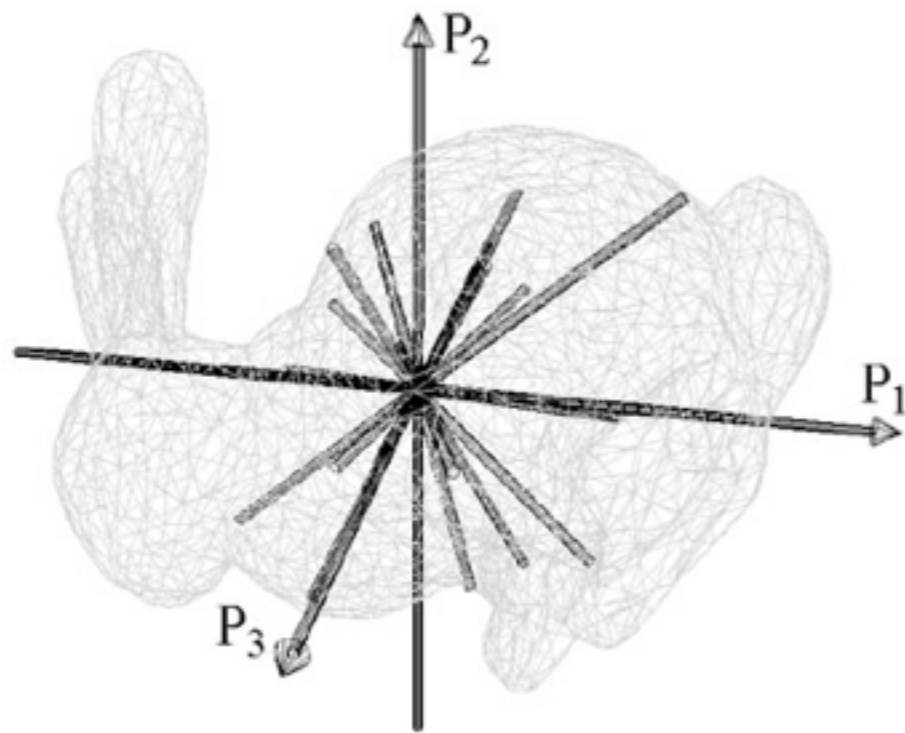


Ray-based scanning after
principal axes transformation


Multi-resolution spherical
harmonics representation

Feature vectors

- Image based

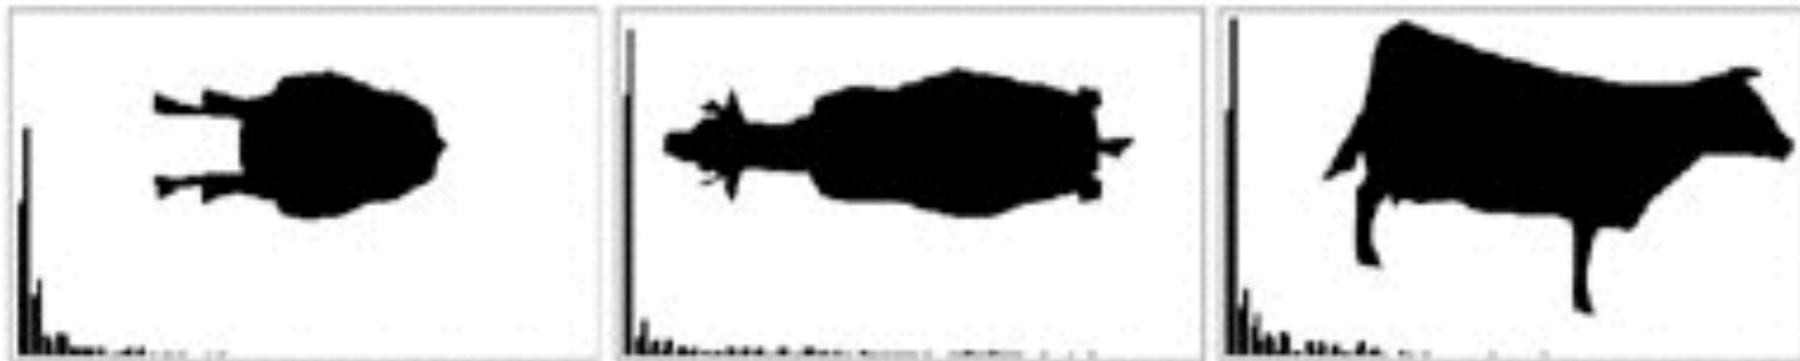


Flat 2D silhouettes with Fourier coefficients

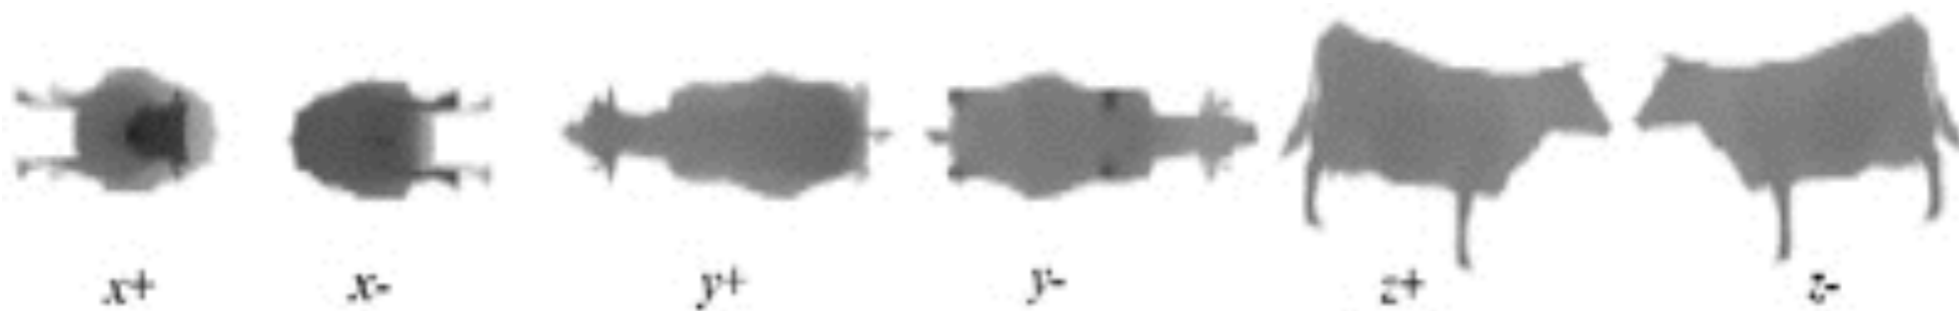

Depth buffer maps from 6 directions

What's good?

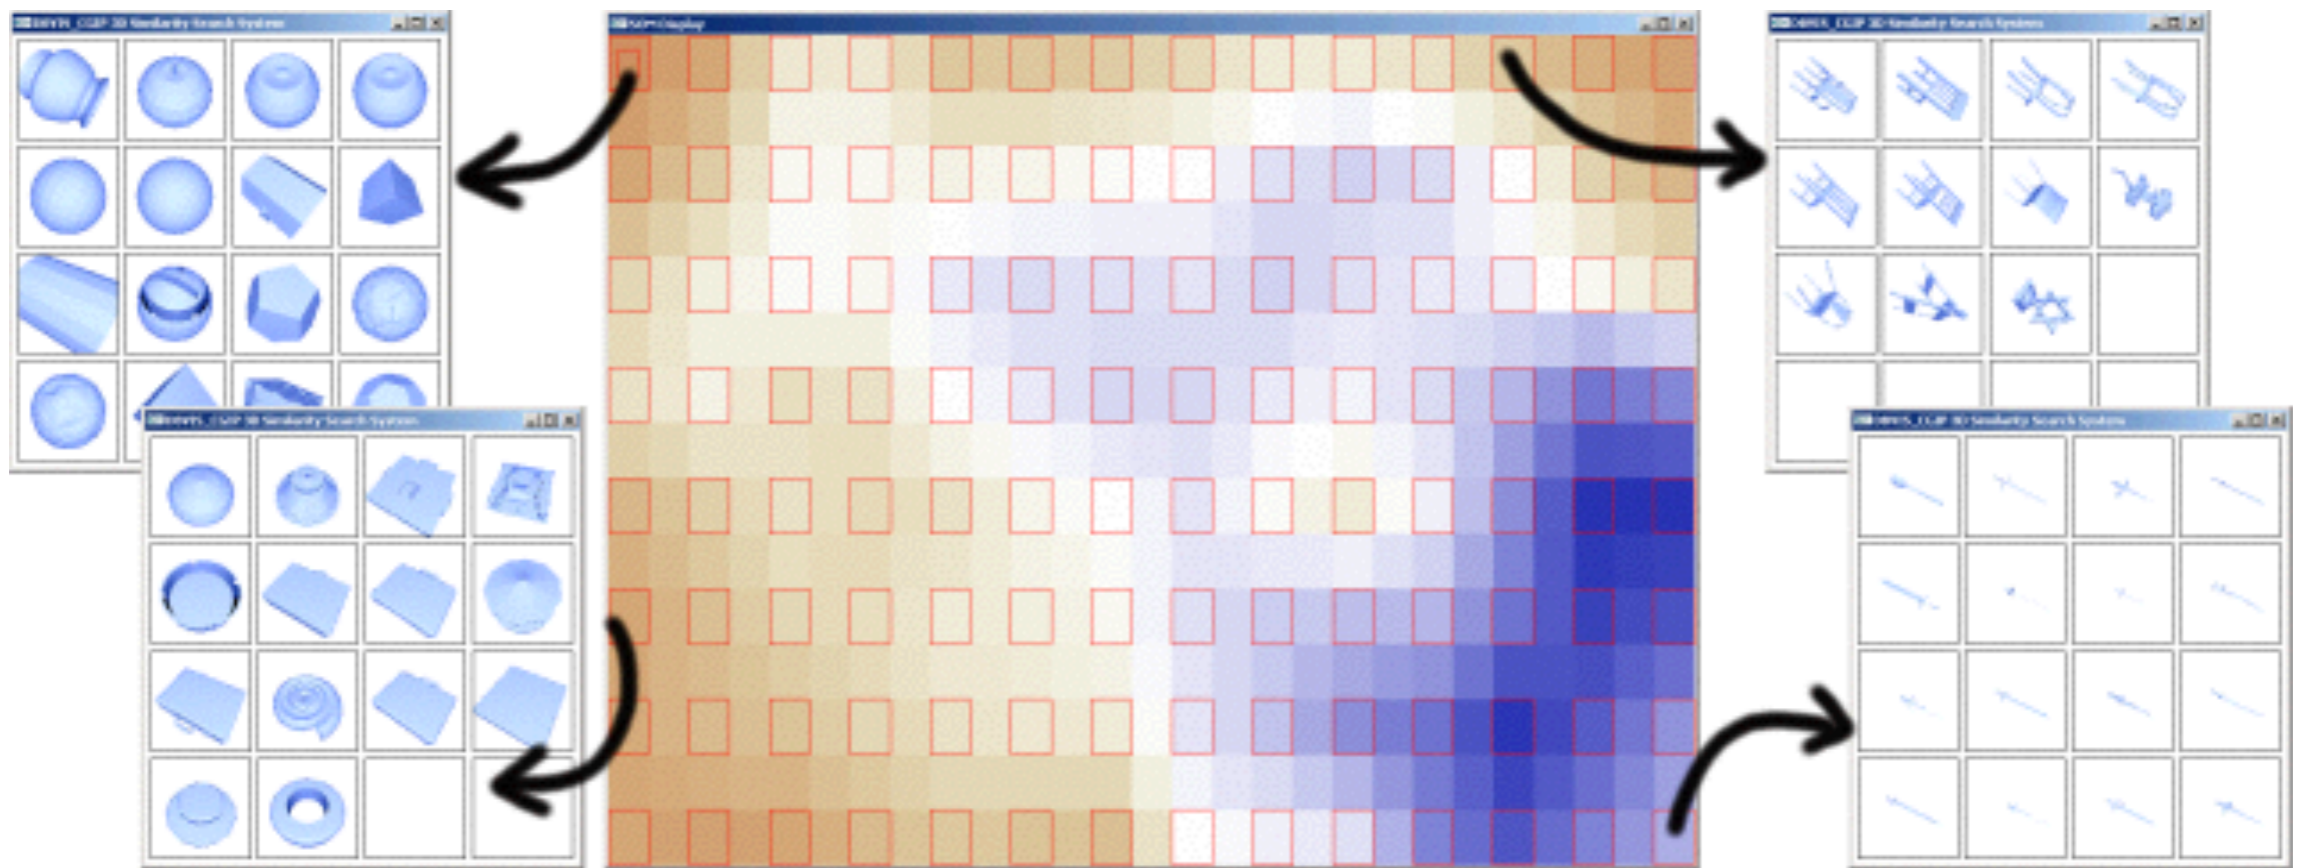

Self-organizing map of a 3D database

About the final examination



About the final examination

- 6~8道题，基本概念、基础算法、系统架构
- 开卷

- 时间：2013年11月13日 (08:00-10:00)
- 地点：玉泉教4-406(多)



未来 ?!?

数字媒体资源管理
Digital Asset Management

Two applications

- Game design and film production
 - course note #16
- Digital library
 - course note #17

Possible DAM future

- Challenges on:
 - Techniques
 - Business
 - Culture

Possible DAM future

- Techniques
 - cloud computing / mobile computing
 - (super) large scale storage
 - new games or new UI (brain interface?)
 - new applications, new standards and new protocols

Possible DAM future

- New business models
 - What will be the next giant after MicroSoft, Google, Apple, Facebook, Oracle, Intel and IBM?
 - Information always has large value

Possible DAM future

- Culture and philosophy
 - to explore new dimensions of our world
 - immortal information (forever?)
 - complicated or simple live

并非结语

- 做我们自己的开发系统!



This is NOT the dam end

You are the future!